


# PCM-9375

AMD Geode™ LX800 3.5" SBC, CRT, LVDS, LCD, 2 LAN, IDE, SATA, PC/104

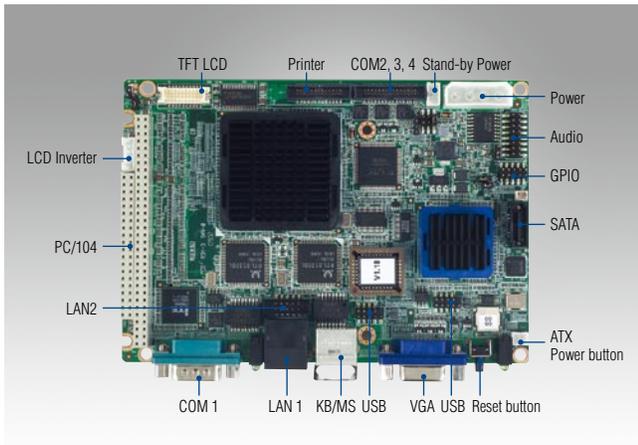

## Features

- AMD Geode™ low power LX800 500 MHz processor
- 24-bit TFT LCD interface, 18-bit LVDS LCD display
- Dual 10/100 Mbps Fast Ethernet
- Supports up to 4 COM ports, 4 USB ports, PC/104 expansion
- Supports embedded software APIs and utilities


**Software APIs:**  GPIO  H/W Monitor  Watchdog  Brightness  SMBus  Backlight On/Off

**Utilities:**  BIOS flash  Monitoring

## Specifications

Processor System	CPU	AMD Geode™ LX800 processor, up to 500 MHz
	Frequency	500 MHz
	L2 Cache	128 KB
	System Chipset	AMD Geode LX800
	BIOS	Award 4 Mb Flash ROM BIOS
Memory	Technology	DDR 333/400 MHz
	Max. Capacity	512 MB (1 GB optional)
	Socket	1 x 200-pin SODIMM
Display	Chipset	AMD Geode LX800
	VRAM	Optimized shared memory architecture up to 64 MB system memory
	Graphics Engine	AMD CS5536 2D engine
	LVDS	1 x 18-bit LVDS (PCM-9375E), up to 1600 x 1200 x 32 bpp at 60 Hz
	VGA	CRT: up to 1920 x 1440 @ 32 bpp (85 Hz) TTL LCD: up to 1920 x 1440 @ 32 bpp (85 Hz)
	Dual Display	CRT+TTL, CRT+LVDS
Ethernet	Speed	10/100 Mbps
	Controller	LAN1 Realtek RTL8100 10/100 Mbps LAN LAN2 Realtek RTL8100 10/100 Mbps LAN
	Connector	RJ-45 on LAN1, box header on LAN2
Audio	Chipset	Realtek ALC203 AC97, Line-in, Line-out, Mic-in
WatchDog Timer		Output system reset Programmable 1 ~ 255 sec
Storage	CompactFlash	1
	SATA	1
	IDE	1
	Floppy	1 (share with LPT)
Rear I/O	Serial	1 (COM1 supports RS-232)
	Ethernet	1 (10/100 Mbps)
	KB/Mouse	1
	VGA	1
	Reset Button	1
Internal I/O	USB	4 x USB 2.0
	Serial	3 x COM COM3/COM4 supports RS-232 COM2 supports RS-232/422/485
	IDE	1 UDMA 33/66
	Parallel (LPT)	1 (share with LPT)
	FDD	1 (share with LPT)
	GPIO	8-bit GPIO
	I <sup>2</sup> C	optional
	Expansion	PC/104 Slot
Power	Power Type	AT/ATX
	Power Supply Voltage	5V + 5%, 12V + 5% (LCD, PC/104)
	Power Consumption (Typical)	Typical: 0.6 A @ 5 V, 0.03 A @ 12 V
	Power Consumption (Max, test in HCT)	MAX: 1.2 A @ 5 V, 0.23 A @ 12 V
	Power Management	APM 1.2, ACPI
Environment	Battery	Lithium 3 V/196 mAH
	Operational	0 ~ 60° C (32 ~ 140° F)
Physical Characteristics	Non-Operational	Operating: 0 ~ 60° C (32 ~ 140° F) (Operating humidity: 40° C @ 85% RH non-condensing) Non-Operating: -40° C ~ 85° C and 60° C @ 95% RH non-condensing
	Dimensions (L x W)	146 x 102 mm (5.7" x 4")
	Weight	0.85 kg (1.87 lb), weight of total package

## Board Diagram

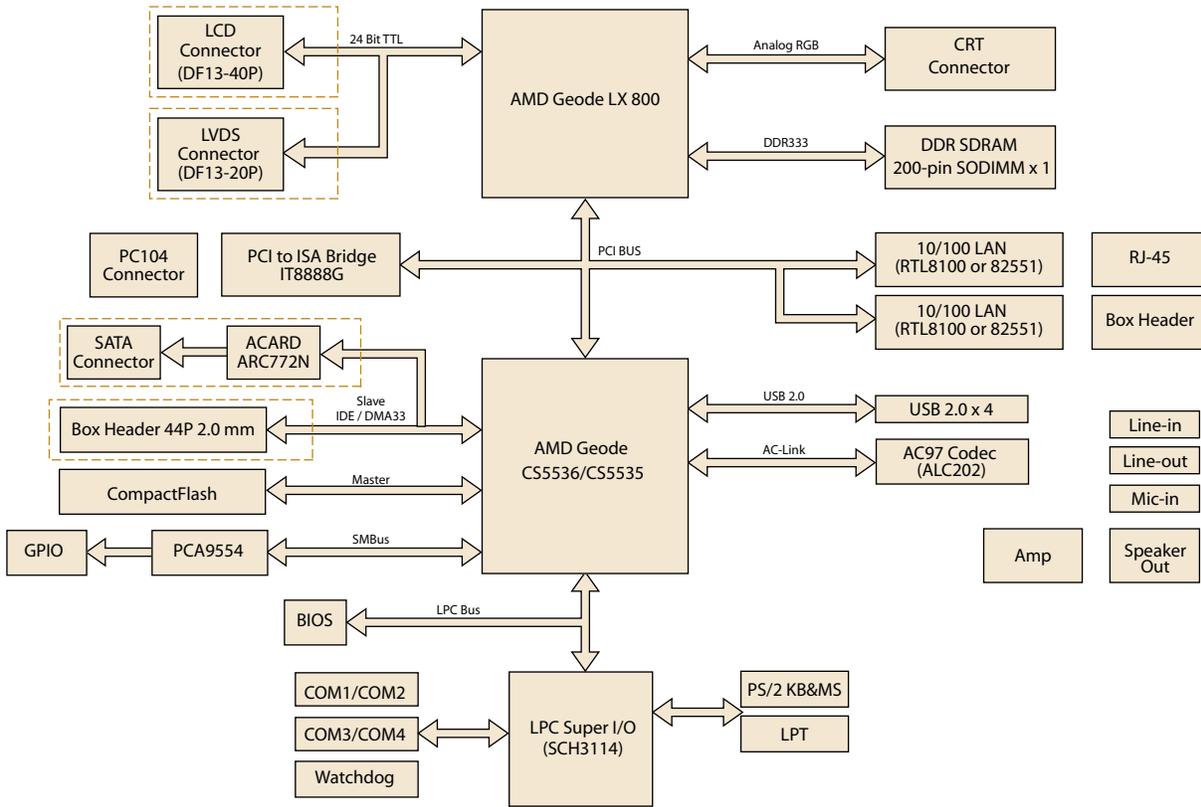

## Ordering Information

Part No.	CPU	CRT	LVDS	TTL	LAN	IDE/SATA	USB2.0	RS-232	RS-232/422/485	LPT	GPIO	CF	PC/104	Thermal Solution	Operating Temp.
PCM-9375F-J0A1E	AMD LX800	1	-	1	2 FE	1 IDE	4	3	1	1	8-bit	1	1	Passive	0 ~ 60° C
PCM-9375E-J0A1E	AMD LX800	1	1	-	2 FE	1 IDE	4	3	1	1	8-bit	1	1	Passive	0 ~ 60° C
PCM-9375SF-J0A1E	AMD LX800	1	-	1	2 FE	1 SATA	4	3	1	1	8-bit	1	1	Passive	0 ~ 60° C
PCM-9375SE-J0A1E	AMD LX800	1	1	-	2 FE	1 SATA	4	3	1	1	8-bit	1	1	Passive	0 ~ 60° C
PCM-9375FZ-J0A1E	AMD LX800	1	-	1	2 FE	1 IDE	4	3	1	1	8-bit	1	1	Passive	-20 ~ 80° C
PCM-9375EZ-J0A1E	AMD LX800	1	1	-	2 FE	1 IDE	4	3	1	1	8-bit	1	1	Passive	-20 ~ 80° C
PCM-9375FZ2-J0A1E	AMD LX800	1	-	1	2 FE	1 IDE	4	3	1	1	8-bit	1	1	Passive	-40 ~ 85° C
PCM-9375EZ2-J0A1E	AMD LX800	1	1	-	2 FE	1 IDE	4	3	1	1	8-bit	1	1	Passive	-40 ~ 85° C

## Packing List

Part No.	Description	Quantity
	PCM-9375 SBC	
	Startup Manual	
	Utility CD	
1701440351	IDE cable (44p/44p)	x 1
1700060202	KB/MS cable	x 1
1701100202	LAN cable	x 1
1700001971	COM 2/3/4 RS-232 cable	x 1
1700260250	Parallel Port cable	x 1
1703160160	Audio cable	x 1
1703100121	USB cable (2 ports)	x 1

## Optional Accessories

Part No.	Description
1703040157	COM2 cable for RS-422/485
1703200201	ATX power control cable

## Floppy Disk Module

Part No.	Description
9696937580E	PCM-9375-FDD module
1701340700	Flat cable 34-pin for FDD
1700016261	2 x LPT cable 2 LPT 1.27 mm

## Embedded OS/API

Embedded OS/API	Part No.	Description
WinCE 5.0	2070000729	Image PCM-9375 CE 5.0 Pro Plus Eng
	2070001612	CE60 Pro GX3 4COM V1.0 ENG
	2070007509	CE 6.0 Pro PCM-9375_4COM V1.1 JPN
WinCE 6.0	2070007810	CE60 Pro GX3 4COM V1.2 ENG
	2070000732	Win XPe SP2 for PCM-9375 V2.10, English version (430 MB)
Win XPE	2070001576	XPE FP2007 GX3(LX800) V3.0 ENG
		QNX 6.3.2
QNX		QNX 6.4.1
		Linux WDT Driver Ubuntu8.04 PCM-9375 V1.0 ENG
Linux Software API	205E375000	Linux WDT Driver Ubuntu8.04 PCM-9375 V1.0 ENG
	2066002300	CD SUSI Library V1.0

# Value-Added Software Services

**Software API:** An interface that defines the ways by which an application program may request services from libraries and/or operating systems. Provides not only the underlying drivers required but also a rich set of user-friendly, intelligent and integrated interfaces, which speeds development, enhances security and offers add-on value for Advantech platforms. It plays the role of catalyst between developer and solution, and makes Advantech embedded platforms easier and simpler to adopt and operate with customer applications.

## Software APIs

### Control



**GPIO**

General Purpose Input/Output is a flexible parallel interface that allows a variety of custom connections. It allows users to monitor the level of signal input or set the output status to switch on/off a device. Our API also provides Programmable GPIO, which allows developers to dynamically set the GPIO input or output status.



**SMBus**

SMBus is the System Management Bus defined by Intel® Corporation in 1995. It is used in personal computers and servers for low-speed system management communications. The SMBus API allows a developer to interface a embedded system environment and transfer serial messages using the SMBus protocols, allowing multiple simultaneous device control.



**I2C**

I2C is a bi-directional two wire bus that was developed by Philips for use in their televisions in the 1980s. The I2C API allows a developer to interface with an embedded system environment and transfer serial messages using the I2C protocols, allowing multiple simultaneous device control.

### Display



**Brightness Control**

The Brightness Control API allows a developer to interface with an embedded device to easily control brightness.



**Backlight**

The Backlight API allows a developer to control the backlight (screen) on/off in an embedded device.

### Monitor



**Watchdog**

A watchdog timer (WDT) is a device that performs a specific operation after a certain period of time if something goes wrong and the system does not recover on its own. A watchdog timer can be programmed to perform a warm boot (restarting the system) after a certain number of seconds.



**Hardware Monitor**

The Hardware Monitor (HWM) API is a system health supervision API that inspects certain condition indexes, such as fan speed, temperature and voltage.



**Hardware Control**

The Hardware Control API allows developers to set the PWM (Pulse Width Modulation) value to adjust fan speed or other devices; it can also be used to adjust the LCD brightness.

### Power Saving



**CPU Speed**


Make use of Intel SpeedStep technology to reduce power consumption. The system will automatically adjust the CPU Speed depending on system loading.



**System Throttling**

Refers to a series of methods for reducing power consumption in computers by lowering the clock frequency. These APIs allow the user to lower the clock from 87.5% to 12.5%.

## Software Utilities



**BIOS Flash**

The BIOS Flash utility allows customers to update the flash ROM BIOS version, or use it to back up current BIOS by copying it from the flash chip to a file on customers' disk. The BIOS Flash utility also provides a command line version and API for fast implementation into customized applications.



**Embedded Security ID**

The embedded application is the most important property of a system integrator. It contains valuable intellectual property, design knowledge and innovation, but it is easily copied! The Embedded Security ID utility provides reliable security functions for customers to secure their application data within embedded BIOS.



**Monitoring**

The Monitoring utility allows the customer to monitor system health, including voltage, CPU and system temperature and fan speed. These items are important to a device; if critical errors happen and are not solved immediately, permanent damage may be caused.



**eSOS**

The eSOS is a small OS stored in BIOS ROM. It will boot up in case of a main OS crash. It will diagnose the hardware status, and then send an e-mail to a designated administrator. The eSOS also provides remote connection: Telnet server and FTP server, allowing the administrator to rescue the system.



**Flash Lock**

Flash Lock is a mechanism that binds the board and CF card (SQFlash) together. The user can "Lock" SQFlash via the Flash Lock function and "Unlock" it via BIOS while booting. A locked SQFlash cannot be read by any card reader or boot from other platforms without a BIOS with the "Unlock" feature.