



DC input side



User's Manual



Video



AC output side



IEC62368-1 BS EN/EN62368-1 (for 112/124 type GFCI only)

TPTC004 AS/NZS 62368.1

Features

- Built-in UPS function (AC by-pass)
- True sine wave output (THD<3%)
- High surge power up to 2000W
- Temperature controlled cooling fan
- AC output voltage and frequency selectable by DIP S.W
- -25°C~+70°C wide operating temperature
- Power ON-OFF remote control
- Front panel indicator for operation status
- Protections :
Input : Reverse polarity / DC low alarm / DC low shutdown / Over voltage
Output : Short circuit / Overload / Over temp.
- Battery over discharge protection (low voltage disconnect)
- Suitable for lead-acid or li-ion batteries
- Remote controller
(IRC1, IRC2, IRC3 accessory sold separately, please refer to: <https://www.meanwell.com/webapp/product/search.aspx?prod=IRC1>)
- Support RS-232 communication
- Pull handle accessory available(sold sperately)
- Conformal coating
- 3 years warranty

Applications

- Home and office appliance
- Power tools
- Portable equipment
- Vehicle
- Yacht
- Off-grid solar power system
- Wireless network
- Telecom or datacom system

Description

NTU-1200 is a 1200W highly reliable off-grid true sine wave DC-AC power inverter with built-in UPS function(AC by-pass). Its key features include: digital design with MCU control, streamlined control circuitry that quickly responds to environmental changes and improves reliability, high quality fan with low acoustic noise, 2000W peak power, adjustable AC output voltage and frequency, -25~+70°C wide operating temperature range, complete protection features, and etc. Combined with batteries, the NTU-1200 is suitable for use in residential, commercial, marine, automobile, mine, construction site, and remote areas with no access to utility power, and the output can be used to power fans, TV, radio, phone charger, PC/laptop, lighting, induction stove, air conditioner, electromechanical tool, communication equipment, power distribution cabinet, outdoor camping equipment, marine AC power, factory equipment, and etc.

Model Encoding

NTU - 1200 - 1 12 US






- AC output socket (Type US, EU, CN, AU, UK, UN, GFCI outlet)
- DC input voltage (12: 12Vdc, 24: 24Vdc, 48: 48Vdc)
- AC output voltage (1: 100/110/115/120Vac, 2:200/220/230/240Vac)
- Rated wattage
- Series name





SPECIFICATION

MODEL NO.			NTU-1200-112□			NTU-1200-124□			NTU-1200-148□			NTU-1200-212□			NTU-1200-224□			NTU-1200-248□			
			□ = US, GFCI, UN						□ = EU, CN, AU, UK, UN												
AC OUTPUT	RATED POWER(Continuous)		1200W																		
	OVER RATED POWER(3 Min.)		1380W																		
	PEAK POWER(10 Sec.)		1800W																		
	SURGE POWER(30 Cycles)		2000W																		
	AC VOLTAGE		Default setting set at 110VAC						Default setting set at 230VAC												
			100 / 110 / 115 / 120Vac selectable by DIP S.W						200 / 220 / 230 / 240Vac selectable by DIP S.W												
	FREQUENCY		Default setting set at 60±0.1Hz						Default setting set at 50±0.1Hz												
			50/60Hz selectable by DIP S.W						50/60Hz selectable by DIP S.W												
	WAVEFORM		Note.1 True sine wave (THD<3%)																		
AC REGULATION		± 3.0% at rated input voltage																			
FRONT PANEL LED		Please see page 5																			
DC INPUT	DC VOLTAGE		12Vdc			24Vdc			48Vdc			12Vdc			24Vdc			48Vdc			
	VOLTAGE RANGE (Typ.)		10 ~ 16.5Vdc			20 ~ 33Vdc			40 ~ 66Vdc			10 ~ 16.5Vdc			20 ~ 33Vdc			40 ~ 66Vdc			
	DC CURRENT (Typ.)		120A			60A			30A			120A			60A			30A			
	NO LOAD DISSIPATION (Typ.)	NON-SAVING MODE	15W									25W									
		SAVING MODE	Default disable, auto detect AC output load≤ 10W will be changed to saving mode																		
			<8W																		
	OFF MODE CURRENT DRAW		≤ 1mA																		
	EFFICIENCY (Typ.)		Note.1 89%			90%			91%			90%			92%			93%			
BATTERY TYPES		Lead Acid or li-ion																			
PROTECTION	DC INPUT	FUSE (INTERNAL)		40A*4			40A*2			25A*2			40A*4			40A*2			25A*2		
		LOW	ALARM	11±0.3Vdc			22±0.5Vdc			44±1Vdc			11±0.3Vdc			22±0.5Vdc			44±1Vdc		
			SHUTDOWN	10±0.3Vdc			20±0.5Vdc			40±1Vdc			10±0.3Vdc			20±0.5Vdc			40±1Vdc		
			RESTART	12.5±0.3Vdc			25±0.5Vdc			50±1Vdc			12.5±0.3Vdc			25±0.5Vdc			50±1Vdc		
		HIGH	ALARM	15.5±0.3Vdc			31±0.5Vdc			62±1Vdc			15.5±0.3Vdc			31±0.5Vdc			62±1Vdc		
			SHUTDOWN	16.5±0.3Vdc			33±0.5Vdc			66±1Vdc			16.5±0.3Vdc			33±0.5Vdc			66±1Vdc		
			RESTART	15±0.3Vdc			30±0.5Vdc			60±1Vdc			15±0.3Vdc			30±0.5Vdc			60±1Vdc		
		BAT. POLARITY		By internal fuse open																	
		AC OUTPUT	OVER TEMPERATURE		Protection type : Shut down o/p voltage, re-power on to recover																
	OUTPUT SHORT		Protection type : Shut down o/p voltage, re-power on to recover																		
	OVER LOAD (Typ.)		105 ~ 115% load for 180 sec., 115% ~ 150% load for 10 sec.																		
			Protection type : Shut down o/p voltage, re-power on to recover																		
	CIRCUIT BREAKER		15A									10A									
GFCI PROTECTION		UL458 (Only for "GFCI" AC socket, by request)						None													
FUNCTION	REMOTE CONTROL	CONNECTOR	Power ON-OFF remote control by front panel dry contact connector(by RELAY), Open : Normal work ; Short : Remote off																		
		ACCESSORY	Remote controller sold separately, Order No.: IRC1,IRC2,IRC3																		
	RS-232 COMMUNICATION		RS-232 ~ RJ11 Type connector (Please refer to page 4 for more details)																		
AC UPS MODE	AC INPUT RANGE		100/110/115/120Vac± 16%, recover± 13%									200/220/230/240Vac± 16%, recover± 13%									
	FREQUENCY RANGE		45 ~ 65Hz																		
	TRASFER TIME(Typ.)		10ms inverter → AC by pass																		
ENVIRONMENT	WORKING TEMP.		-25 ~ +70℃ (Refer to "Derating curve")																		
	WORKING HUMIDITY		20% ~ 90% RH non-condensing																		
	STORAGE TEMP., HUMIDITY		-30 ~ +70℃ / -22 ~ +158°F, 10 ~ 95% RH non-condensing																		
	VIBRATION		10 ~ 500Hz, 3G 10min./1cycle, 60min. each along X, Y, Z axes																		
SAFETY & EMC (Note.3)	SAFETY STANDARDS		CB IEC62368-1,Dekra BS EN/EN62368-1,UL458, E13,EAC TP TC 004 approved; Design refer to AS/NZS 62368.1 (Please refer to next page"AC output socket" table for more details)																		
	WITHSTAND VOLTAGE		DC I/P - AC I/P:3.0KVac DC I/P - AC O/P:3.0KVac AC O/P - FG:1.5KVac																		
	EMC EMISSION	Parameter	Standard												Test Level / Note						
		Radiated	FCC for 112,124,148 only(expect for Type-UN)												Class A						
			BS EN/EN55032(CISPR32) for 212,224,248 only(expect for Type-UN)												Class A						
		Conducted	FCC for 112,124,148 only(expect for Type-UN)												Class A						
			BS EN/EN55032(CISPR32) for 212,224,248 only(expect for Type-UN)												Class A						
		Harmonic Current	BS EN/EN61000-3-2												Class A						
	Voltage Flicker	BS EN/EN61000-3-3												-----							
	EMC IMMUNITY	BS EN/EN55024, BS EN/EN55035																			
		Parameter	Standard												Test Level / Note						
		ESD	BS EN/EN61000-4-2												Level 3, 8KV air ; Level 2, 4KV contact						
		Radiated	BS EN/EN61000-4-3												Level 2						
		EFT / Burst	BS EN/EN61000-4-4												Level 2, 1KV						
		Surge	BS EN/EN61000-4-5												Level 3, 1KV/Line-Line 2KV/Line-Earth						
		Conducted	BS EN/EN61000-4-6												Level 2						
		Magnetic Field	BS EN/EN61000-4-8												Level 1						
		Voltage Dips and Interruptions	BS EN/EN61000-4-11												>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods						
	OTHERS	MTBF		166.3K hrs min. Telcordia TR/SR-332 (Bellcore) ; 58.3K hrs min. MIL-HDBK-217F (25℃)																	
DIMENSION		333*184*70mm (L*W*H)																			
PACKING		3.3Kg; 2pcs/ 7.6Kg/ 1.25CUFT																			
NOTE	1.Efficiency, AC regulation and THD are tested by 900W load, linear load at 12.5Vdc/25Vdc/50Vdc input voltage. 2.All parameters not specified above are measured at rated load, 25℃ of ambient temperature and set to factory setting. 3.The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com) ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx																				

■ AC Output Socket

MODEL NO.	NTU-1200-112□	NTU-1200-124□	NTU-1200-148□	NTU-1200-212□	NTU-1200-224□	NTU-1200-248□
Socket type						
	TYPE-US	TYPE-GFCI	TYPE-UN	TYPE-EU	TYPE-CN	TYPE-AU
	Standard	Optional	Standard	Standard	Standard	Optional
Country	USA	USA	UNIVERSAL	EUROPE	CHINA	AUSTRALIA
Certificate	CB FC DEKRA	CB FC UL US (Except for 48V input)	None	CB E13 DEKRA EAC CE UK	CB E13 DEKRA EAC CE UK	CB E13 DEKRA EAC CE UK


■ DERATING CURVE

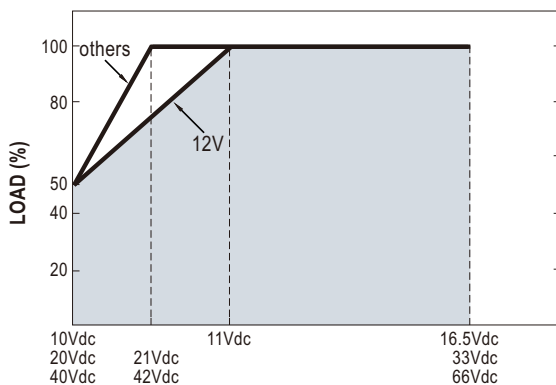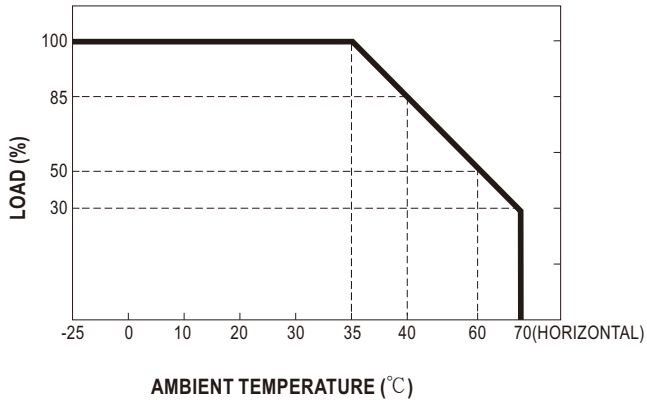

■ IRC1/2/3 Remote Controller (Accessory sold separately)

- IRC1/IRC2/IRC3 is the monitoring and control unit.
- IRC1/IRC2/IRC3 can decode the RS-232 signals sent by the inverter series and display through digital meters.


Note: Part of the control signals will not function properly due to different compliance of each model.

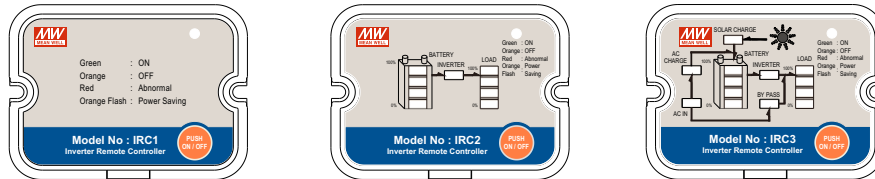

※ Please refer to for more detail: <https://www.meanwell.com/webapp/product/search.aspx?prod=IRC1>

■ Support RS-232 Communication

- The internal data of single NTU-1200 can be read through RS-232.

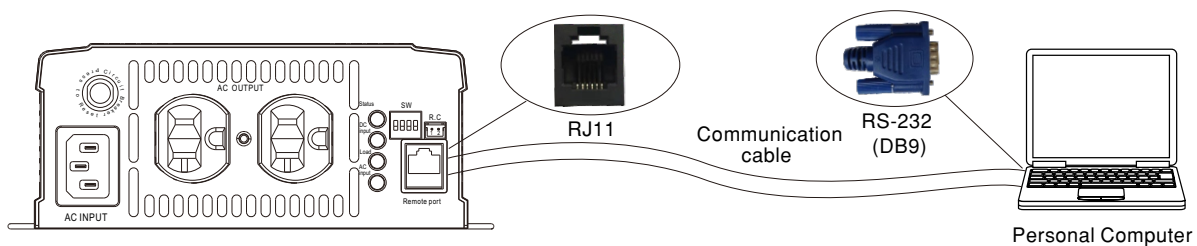

※ Please refer to for more detail: <http://www.meanwell.com/manual.html>


※ RJ11-RS232 Communication cable should be ordered separately, Order No.: RJ11-RS232

■ Remote ON-OFF Control (Built-in)

Remote ON-OFF	AC Output Status
Open	power inverter ON
Short	power inverter OFF

■ AC Output Voltage, Frequency, Power saving mode selectable by DIP SW

Output voltage and frequency setting factory settings are either 110Vac/60Hz or 230Vac/50Hz, users are able to adjust the voltage and frequency, through the DIP switch of position 1,2,3,4 on the panel.

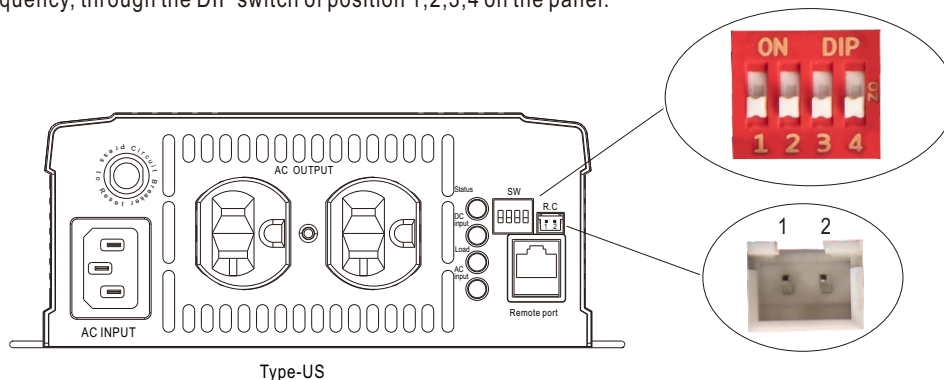

Type-US

AC Output Voltage, Frequency, Power saving mode selectable by DIP SW

SW1	SW2	SW3	SW4
OFF	OFF : 100Vac or 200Vac	ON : 50Hz	ON : Saving mode
OFF	ON : 110Vac or 220Vac		
ON	OFF : 115Vac or 230Vac	OFF: 60Hz	OFF: Non-Saving mode
ON	ON : 120Vac or 240Vac		

■ LED STATUS

Normal work:

	Green	Orange	Red
Status	 Inverter OK	 Remote off  Saving mode	 Abnormal Status (See below table)

	Green	Orange	Red
DC Input	 12.5~15.5Vdc  25~31Vdc  50~62Vdc	 11~12.5Vdc  22~25Vdc  44~50Vdc	 <11Vdc or >15.5Vdc  <22Vdc or >31Vdc  <44Vdc or >62Vdc

	Green	Orange	Red
Load	 <40% load	 40~80% load	 >80% load

	Green	Orange	Red
AC Input	 Utility OK  Utility error  Utility disconnected	----- -----	----- -----

Abnormal status :



LED Indicator	Abnormal Indication
Status  DC Input  Load 	Output overload or AC output short circuit
Status  DC Input  Load 	Abnormal DC voltage
Status  DC Input  Load 	Over temperature or Fan lock
Status  DC Input  Load 	Inverter fail

 Light


 Light off

 Flash


MECHANICAL SPECIFICATION

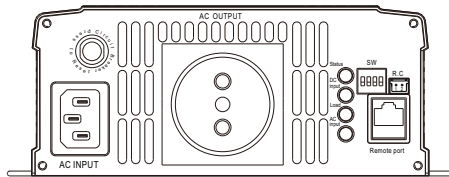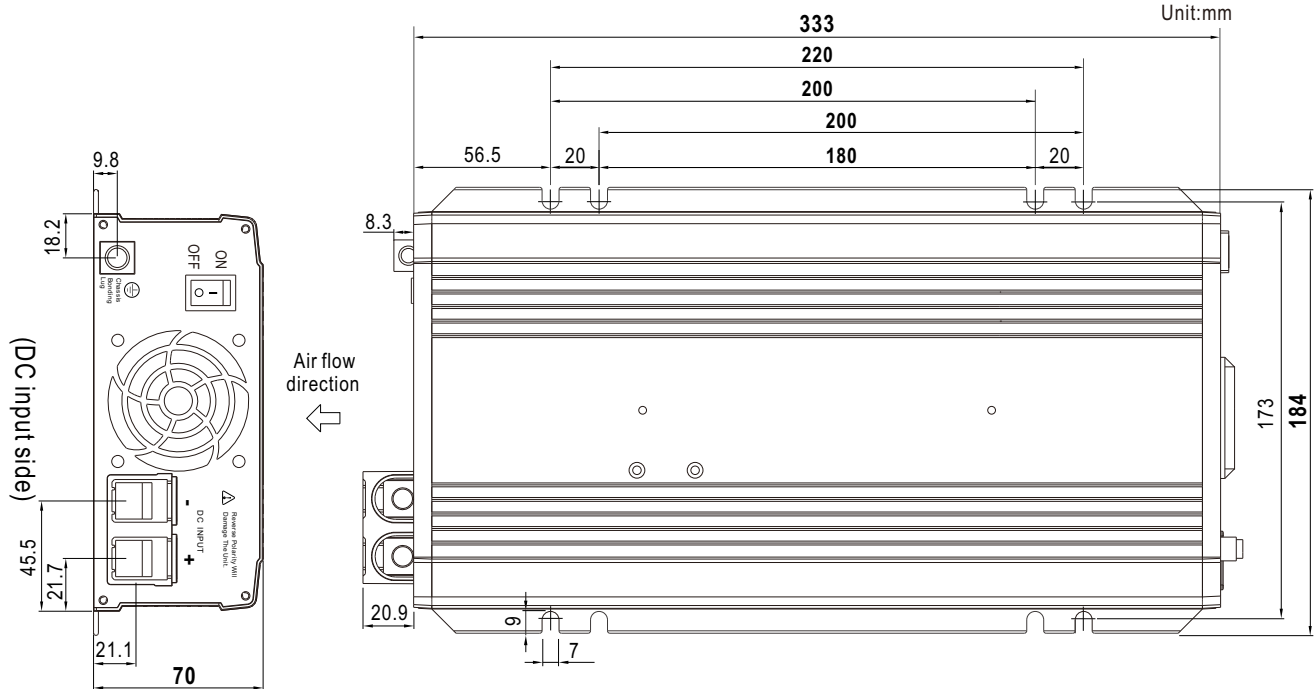


Type-EU

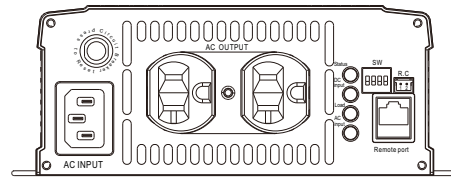

Type-US

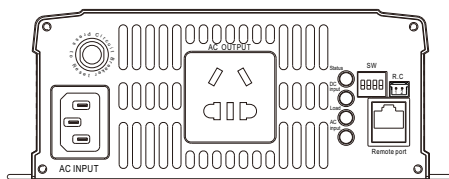

Type-CN

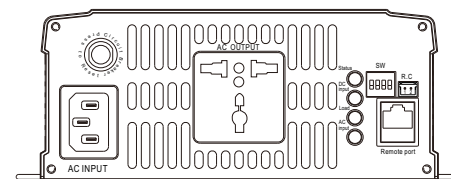

Type-UN

(AC output side)

R.C Connector : JST B-XH or equivalent

Remote Control	Mating Housing	Terminal
Pin 1,2 Open: Normal work	JST XHP or equivalent	JST SXH-001T or equivalent
Pin 1,2 Short: Remote off		

Remote port connector (RJ11)



Remote port

Assignment	Rx	GND	Tx
Remote port	2	3	4
DB9	3	5	2

■ Accessory List


※ Communication cable (Optional accessory, Power inverter and Communication cable should ordered separately)

MW's Order No.	Item	Quantity
RJ11-RS232		1


※ Pull handle (Optional accessory, Power inverter and Pull handle should ordered separately)

MW's Order No.	Item		Quantity
Carry Handle	①	Pull handle 	1
	②	Foot pad 	4
	③	Screw 	2


① Pull Handle

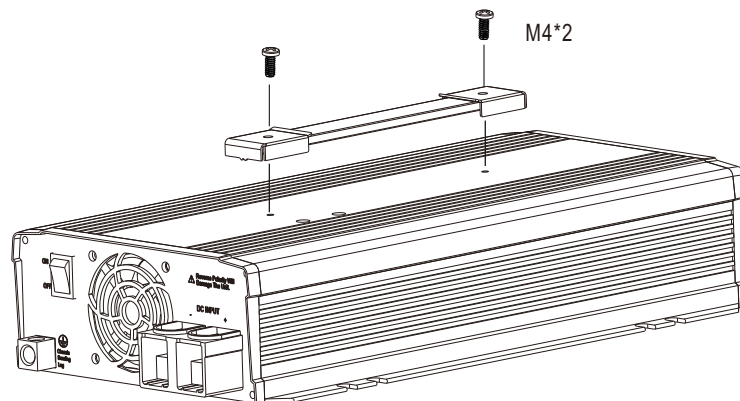

② Foot pad

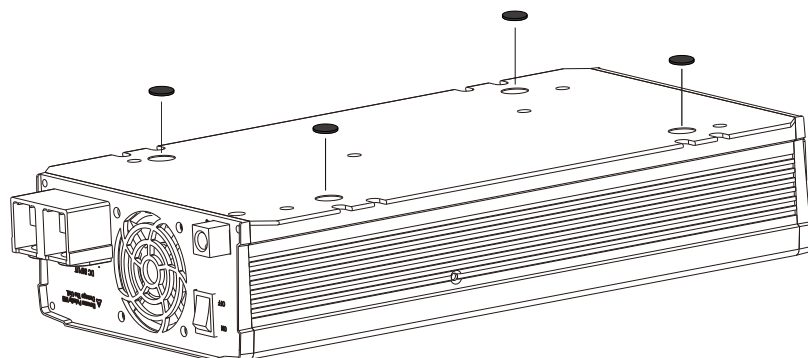


■ TYPICAL APPLICATION

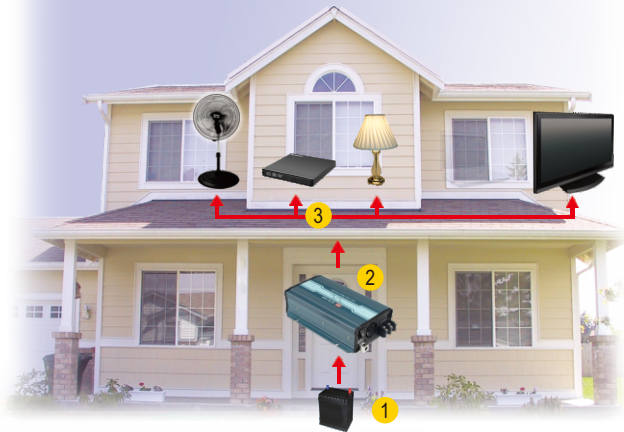

- 1 Battery Bank
- 2 Off-Grid DC/AC Solar Inverter (NTU series)
- 3 AC Outlet



- 1 Utility Input (Shore)
- 2 AC/DC Battery Charger (PB/NPB/NPP series)
- 3 Battery Bank
- 4 Off-Grid DC/AC Power Inverter (NTU series)
- 5 AC Outlet

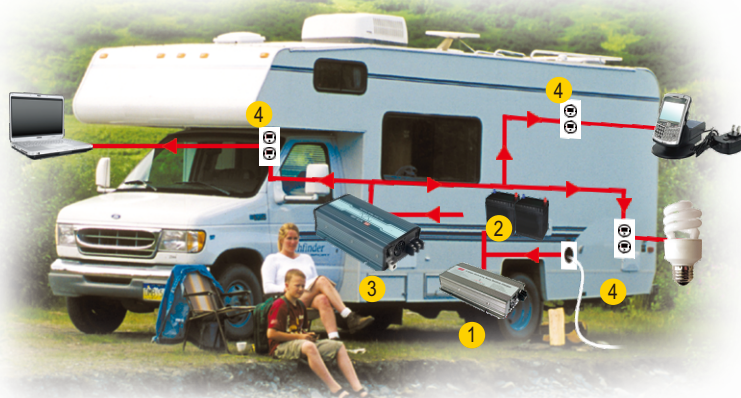

- 1 AC/DC Battery Charger (PB/NPB/NPP series)
- 2 Battery Bank
- 3 Off-Grid DC/AC Inverter (NTU series)
- 4 AC Outlet

■ INSTALLATION MANUAL

Please refer to : <http://www.meanwell.com/manual.html>