

Dual-RF Wireless Redundancy

Jackie Shi, Head

jackie.shi@moxa.com

Moxa Industrial Wireless Business Division

Introduction

According a recent VDC report, more than 40% of wireless users are concerned about interference, and this issue is even more important for industrial and critical applications.

Interference normally occurs at a particular frequency, so if we can use 2 or more different frequencies to communicate at the same time, data transmission will continue even if there is interference on one of the frequencies. In this paper we explain the traditional single-RF (single radio frequency) and dual-RF (dual radio frequency) wireless architectures, and show what Moxa provides in the way of dual-RF technology.

Single-RF Wireless Architecture—the Traditional Approach

The following figure shows the standard architecture of a wireless infrastructure in which access points (AP) are used to connect many Clients to an Ethernet network. Since the AP and Client are connected by a single-RF connection, if the RF connection fails, the system and network behind the Client will be disconnected.

Released on September 29, 2009

Copyright © 2009 Moxa Inc. All rights reserved.

Moxa manufactures a wide array of device networking products for industrial automation. Information about all Moxa products, which include embedded computers, Ethernet switches, wireless solutions, serial device servers, multiport serial boards, media converters, USB-to-serial converters, embedded device servers, video networking products, and industrial I/O solutions, is available on Moxa's corporate website at www.moxa.com.

How to contact Moxa

Tel: 1-714-528-6777
Fax: 1-714-528-6778
Web: www.moxa.com
Email: info@moxa.com



This document was produced by the Moxa Technical Writing Center (TWC). Please send your comments or suggestions about this or other Moxa documents to twc@moxa.com.

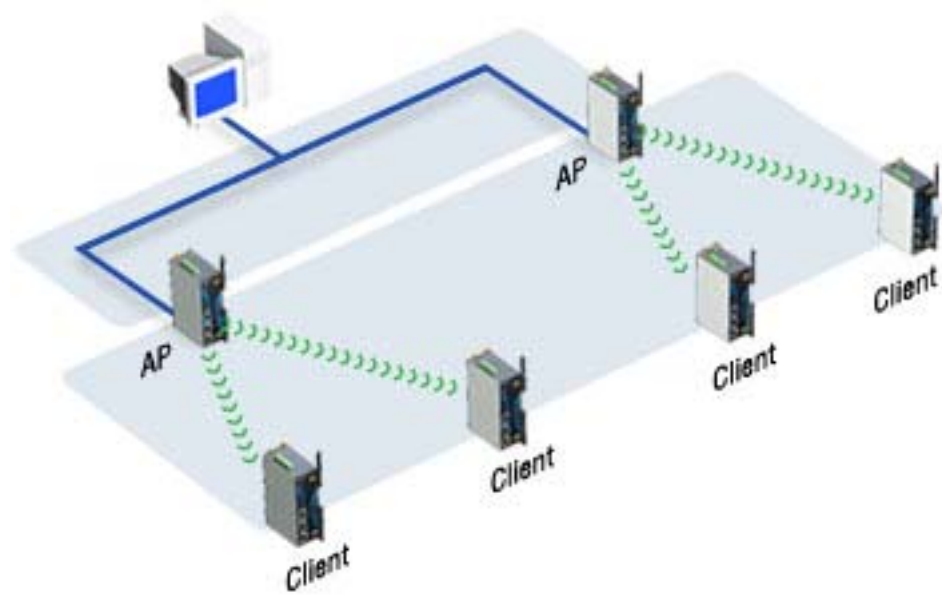


Fig. 1: Traditional Wireless Architecture

Dual-RF Wireless Architecture—a New Approach

One way to achieve network redundancy without needing to change the existing architecture of your wireless LAN is to use APs and Clients that support dual RFs (usually, the two RFs are set to 2.4 GHz and 5 GHz to prevent interference). To ensure that data can be delivered between the APs and Clients even when there is interference on one of the frequencies, Moxa devices provide seamless redundancy by supporting a special protocol with a switching time very close to zero. If your application requires more than just wireless redundancy, Ethernet redundancy can also be incorporated. Fast ring redundancy such as RSTP or Turbo Ring are important for the wired Ethernet side of the network.

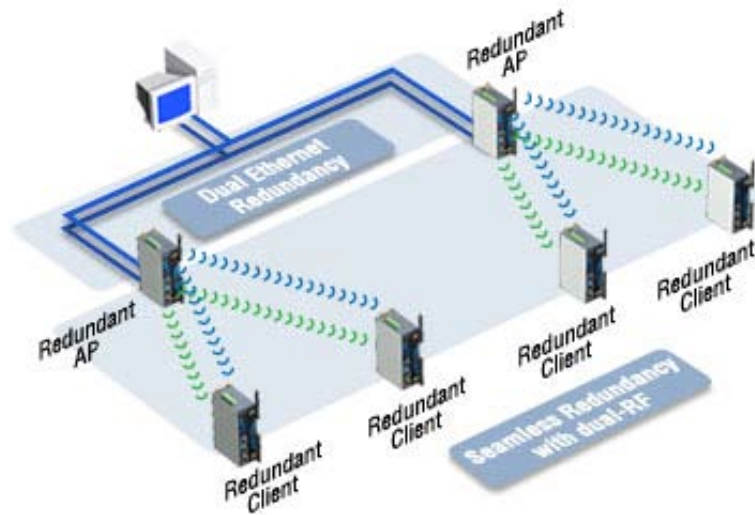


Fig. 2: Redundant Wireless Ethernet

Introduction to Moxa’s Dual-RF Redundancy

Moxa’s advanced AP/Client AWK-5000/6000 series product line provides Dual-RF redundancy. The configuration is very easy. All you need to do is set up redundant AP on the AP side and redundant Client on the client side, and then set a different SSID for each RF. The following figure shows the Web console UI for Moxa’s AWK-5222, in which WLAN1 is set to SSID1 and WLAN2 is set to SSID2.

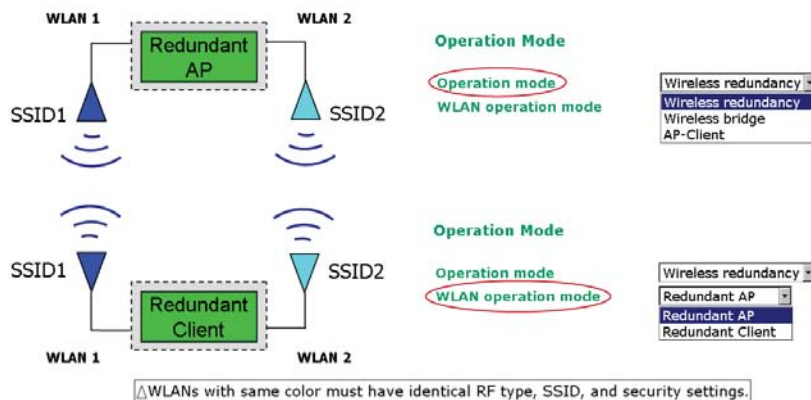


Fig. 3: Dual-RF—Wireless Redundancy Mode

If both the existing Clients and dual-RF clients support redundancy on the same network, Moxa's AWK-5000/6000 Access Point can connect both types of clients to an Ethernet network. As shown in the figure below, enter SSID (Moxa_1_1) in the 2nd column for the AP to connect traditional wireless clients with this SSID to the AP.

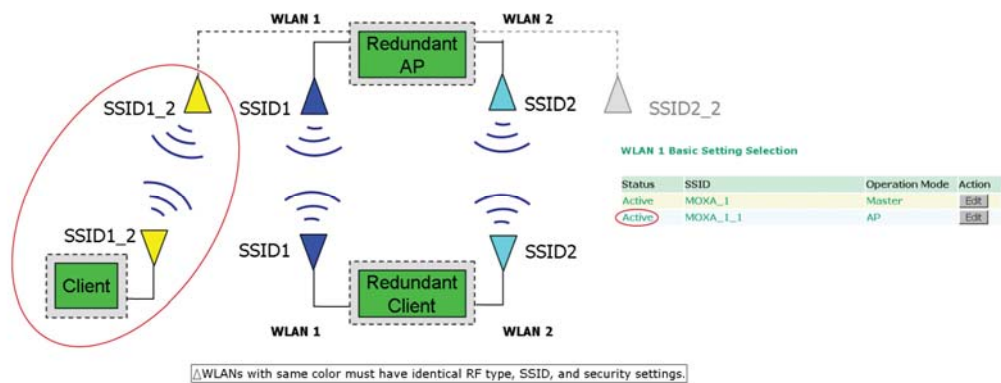


Fig. 4: Single-RF Connection

In addition to wireless redundancy mode, Moxa's AWK-5000/6000 advanced AP/Client devices offer another dual-RF feature called "Wireless Bridge" mode.

Wireless Bridge mode is designed to optimize WDS mode in light of WDS's throughput problem. The normal throughput is

$$\text{Throughput} = \frac{25 \text{ Mbps}}{(n-1)}$$

where the variable n represents the number of WDS nodes (for example, the throughput is approximately 8 Mbps with 4 mesh nodes, resulting in poor performance), as shown below.

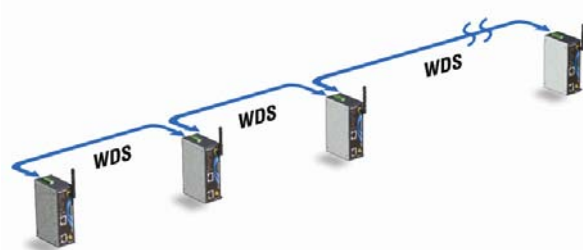


Fig. 5: Single-RF Mesh Network

With Wireless Bridge mode, we can keep the throughput at 10 to 15 Mbps. Configuration is simple; just link the Wireless Bridge master to the Wireless Bridge slave, as shown below.

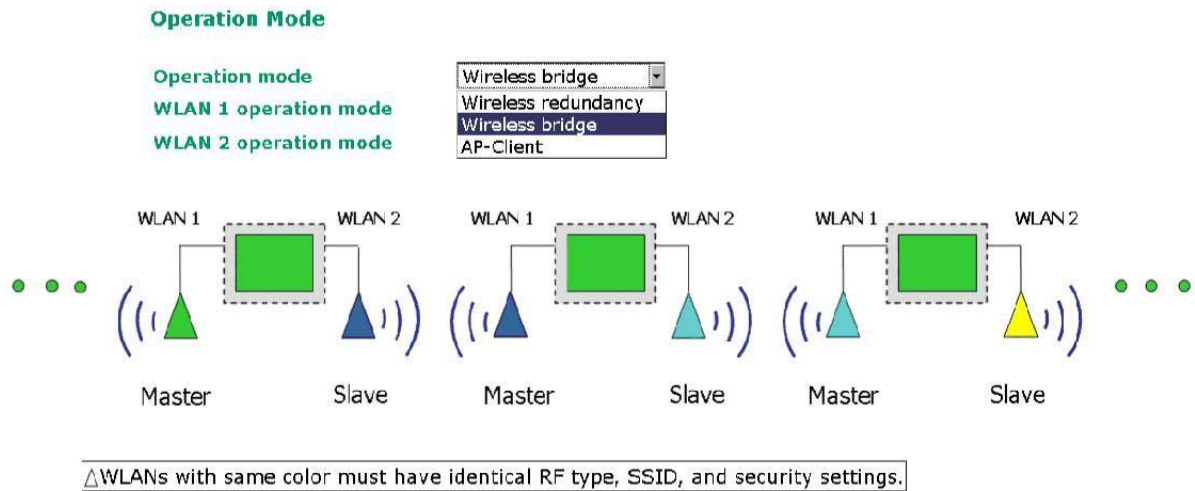


Fig. 6: Wireless Bridge Mode

Wireless Bridge mode can also connect wireless clients to another SSID, as shown below, so it can be used in environments where APs cannot be wired.

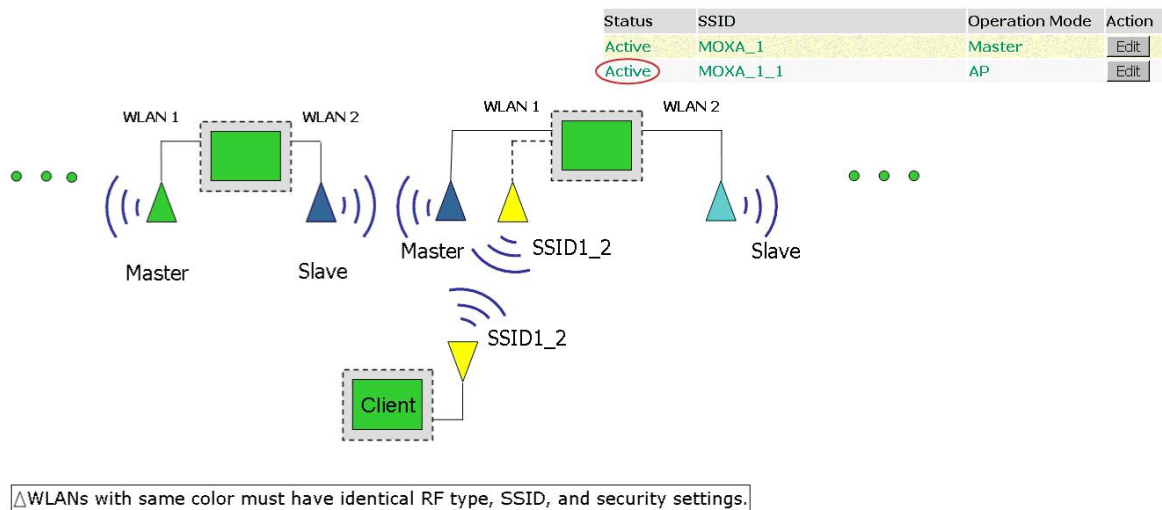


Fig. 7: Bridge Mode for Extra APs

Summary

One of Moxa's latest product offerings uses a dual-RF design in an access point, which provides a wider broadcast range and better coverage, as well as a broad selection of antennas. The product has a rugged, metal housing for operating in an extended temperature range, which is typical of demanding environments. It supports 802.11a/b/g and delivers an industry-leading range and throughput, and meets the performance requirements of industrial applications.

Disclaimer

This document is provided for information purposes only, and the contents hereof are subject to change without notice. This document is not warranted to be error-free, nor subject to any other warranties or conditions, whether expressed orally or implied by law, including implied warranties and conditions of merchantability, or fitness for a particular purpose. We specifically disclaim any liability with respect to this document and no contractual obligations are formed either directly or indirectly by this document. This document may not be reproduced or transmitted in any form for any purpose, without our prior written permission.