


AIMB-223

Mobile AMD G-series Dual Core/Single Core Mini-ITX with CRT/LVDS/HDMI, 6 COM and Dual LAN

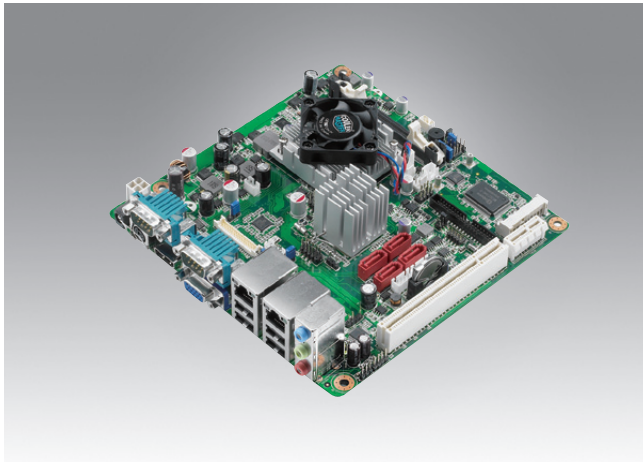

Features

- Supports AMD Mobile G-series Dual Core/Single Core processor
- One 204-pin SODIMM up to 4 GB DDR3 1333/1066 MHz SDRAM
- Supports CRT/LVDS/HDMI
- Dual LANs, 6COM, Mini PCIe, and CFast
- Supports SUSIAccess and Embedded Software APIs


Software APIs:

Utilities:

Specifications

		AMD Dual Core T56N	AMD Single Core T44R	AMD Dual Core T40E
Processor System	CPU	AMD Dual Core T56N	AMD Single Core T44R	AMD Dual Core T40E
	Max. Speed	1.65 GHz (dual core 18W TDP)	1.2 GHz (Single core 9W TDP)	1.0 GHz (dual core 6W TDP)
	L2 Cache	512 KB		
	Chipset	AMD G-Series + A55E		
	BIOS	AMI EFI 16Mbit SPI		
Expansion Slot	PCI	1		
	Mini-PCIe	1		
	PCIe	PCIe x1 (PCIe gen2)		
Memory	Technology	One channel DDR3 1333/1066 MHz		
	Max. Capacity	4 GB		
	Socket	1 x 204 pin SODIMM (Non-ECC)		
Graphics	Controller	ATI Radeon HD 6310, support DirectX 11, UVD3		
	VRAM	TBD		
	CRT	Supports up to 2560 x 1536 @ 32bpp		
	LVDS	Supports 24-bit dual channel and up to 1920 x 1200		
	HDMI	1920 x 1200 @ 60 MHz		
Dual Display	Supports dual display of any two display device (CRT, LVDS, HDMI)			
Ethernet	Interface	10/100/1000 Mbps		
	Controller	GbE LAN1: RTL8111DL; GbE LAN2: RTL8111DL		
	Connector	RJ-45 x 2		
SATA	Max Data Transfer Rate	600 MB/s		
	Channel	4		
EIDE	Mode	None		
	Channel	None		
SSD	CFast CompactFlash	CFast type I/II		
Rear I/O	CRT	1		
	HDMI	1		
	Ethernet	2		
	USB	4 (USB 2.0 compliant)		
	Audio	3 (Mic-in, Line-out, Line-in)		
	Serial	2 (RS-232)		
	DCjack	1 (2.5 mm)		
Internal Connector	LVDS & Inverter	1		
	USB	4 (USB 2.0 compliant)		
	Serial	4 (RS-232, COM3 support 5V/12V by jumper selection)		
	IDE	None		
	SATA	4		
	CFast CompactFlash	1		
	Parallel	None		
Watchdog Timer	Output	System reset		
	Interval	Programmable 1 ~ 255 sec/min		
Power	Power type	Single voltage 12V DC input; 1 x External DC jack; 1 x Internal 4-pin (2x2) power connector; Support AT/ATX mode		
	Power consumption	12 V @ 2.97 A (AMD T56N 1.65 GHz processor/DDR3 1333 MHz 4 GB, SATA HDDx1) 12 V @ 1.36 A (AMD T40E 1.0 Hz processor/DDR3 1333 MHz 4 GB, SATA HDDx1)		
Environment	Operating	Non-Operating		
	Temperature	0 ~ 60° C (32 ~ 140° F)	-40 ~ 85° C (-40 ~ 185° F)	
Physical Characteristics	Dimensions	170 mm x 170 mm (6.69" x 6.69")		

Block Diagram

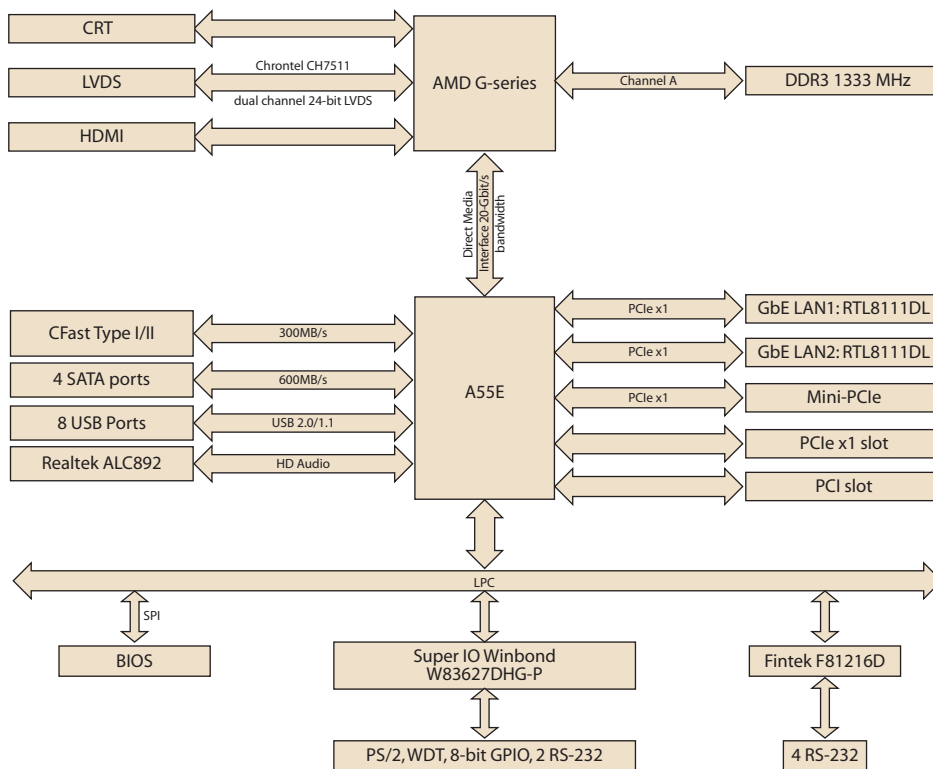

Ordering Information

Part Number	CPU	Display	LAN	COM	TPM	Thermal solution
AIMB-223G2-S0A1E	SC 1.2 GHz	CRT/LVDS/ HDMI	2	6	No	Active
AIMB-223G2-S1A1E	DC 1.0 GHz	CRT/LVDS/ HDMI	2	6	No	Active
AIMB-223G2-S2A1E	DC 1.65 GHz	CRT/LVDS/ HDMI	2	6	Yes	Active

Note: Passive = fanless; Active = with fan

Packing List

Part Number	Quantity
AIMB-223 SBC	1
SATA HDD cable	2
Serial port cable	2
CPU cooler	1
I/O port bracket	1
Startup manual	1
Driver CD	1

Optional Accessories

Part Number	Description
1700003195	USB cable with two ports, 17.5 cm
1700002204	USB cable with two ports, 27 cm
1700008461	USB cable with four ports, 30.5 cm
1757003064	Adapter AC100-240V, 84W, +12V/ 7A FSP
1757003062	Adapter AC100-240V, 60W, +12V/ 5A FSP
TBD	Fanless heatsink

Embedded OS/API

OS/API	Part No.	Description
Win XPE	2070010939	WES09 AIMB-223 V4.0 ENG ATIP
	2070010998	WES7E SP1 x32 AIMB-223 V5.1 ENG ATIP
Software API	TBD	SUSI V3.0 SW API for AIMB-223 XP

I/O View



AIMB-223G2-S0A1E
AIMB-223G2-S1A1E
AIMB-223G2-S2A1E