


CPC-2420

2.5" carrier board for ISA Mini Biscuit

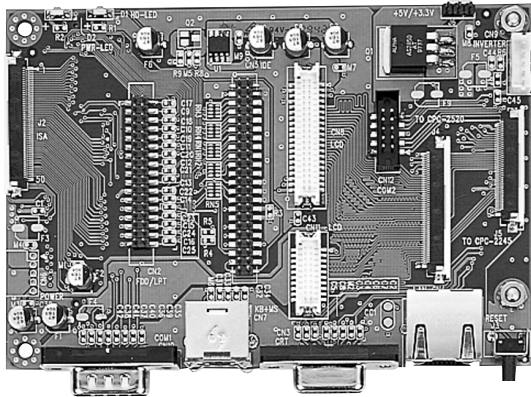

CE

Specifications

Extending Bus I/F	Two 50-pin FPC connectors for ISA bus expansion
Display	DB-15 VGA connector, LCD connector
Communications	DB-9 COM1 connector, 10-pin COM2 box header, RJ-45 Ethernet connector
MIO	EIDE/FDD/LPT/Keyboard/Mouse interface
Size/Weight	120 x 82 mm (4.7" x 3.2"), 0.075 kg (0.166 lb)

Packing List


• Y cable for AT-Keyboard, PS/2 Mouse	1700060201
• EIDE cable	1701440500
• FDD cable	1701340600
• LPT cable	1703340300
• I/O 40-pin FPC cable	1701400301
• LCD 50-pin FPC cable	1701500700
• Utility CD	
• Power cable	1703050050

Ordering Information

• CPC-2420-0000	2.5" carrier board for ISA Mini Biscuit PC
-----------------	--

CPC-2400

ISA Mini Biscuit PC Development board

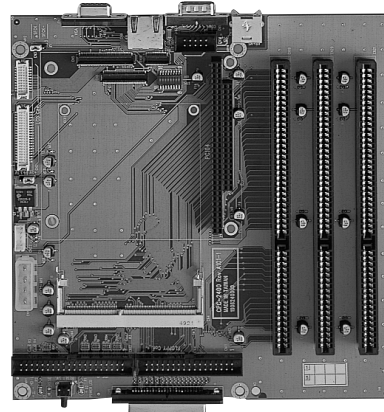

FCC CE

Specifications

Extending Bus I/F	Three ISA bus slots, PC/104 connector
Display	DB-15 VGA connector, LCD connector
Communications	DB-9 COM1 connector, 10-pin COM2 box header, RJ-45 Ethernet connector
MIO	EIDE/FDD/LPT/Keyboard/Mouse interface
Size/Weight	183 x 185 mm (7.2" x 7.3"), 0.25 kg (0.55 lb)

Packing List

• Y cable for AT-Keyboard, PS/2 Mouse (190 mm)	1700060201
• Cable package	9681000001
• I/O 40-pin FPC cable	1701400140
• LCD 50-pin FPC cable	1701500320
• VGA 12-pin FPC cable	1701120320
• Startup manual	
• Utility CD	

Ordering Information

• CPC-2400-0000	ISA Mini Biscuit PC Development board
-----------------	---------------------------------------