

# FWA-3300

## 1U Rackmount VIA C7® Processor-based Platform with 4 Front PCI LAN Ports/2 PCI Expansion Slots



### Features

- Supports VIA C7® Processor
- DDR2 400/533 SODIMM, up to 1 GB
- Four 10/100/1000 Mbps GbE LAN ports
- Supports one fixed 3.5" IDE or SATA HDD
- Optional two 32-bit/33 MHz PCI expansion slot
- LCD display module
- VIA PadLock™ Security Engine for hardware cryptographic acceleration

### Introduction

The FWA-3300 is a cost effective and power efficient Internet Security Platform designed for entry-level small/medium business (SMB) security applications. The platform is driven by the power saving VIA C7™ CPU, combined with the VIA CX700 chipset, making it the ideal alternative for an economical entry level security solution. The VIA C7 processor has a built-in PadLock Security Engine, which is a fast and reliable hardware security accelerator without the extra cost of an add-on card. With support from Marvell 8001 Ethernet controllers, the FWA-3300 provides four Gigabit Ethernet (GbE) LAN ports for robust connectivity.


The FWA-3300 supports an optional IDE or SATA HDD, which effectively enhances the implementation of many Internet security applications such as IDS/IPS, anti-virus, and VPN gateways. Two onboard PCI expansion slots are available for add-on cards. A CompactFlash slot is available for OS and application updates, which can be easily accessed and replaced through an easily removable cover on the back. Plus, there is an optional LCD module on the front panel to display platform status, and a 9-pin RS-232 serial port for local system management, maintenance & diagnostics. The FWA-3300 is FCC, CE, UL, CCC and RoHS compliant.

For more information on the VIA PadLock Security Engine, please visit <http://www.via.com.tw/en/initiatives/padlock/index.jsp>

### Specifications

Processor System	CPU	VIA C7 processor	
	Max. Speed	1.0 GHz	
	Chipset	VIA CX700	
	Front Side Bus	533/400 MHz	
	BIOS	Award™ 4 Mbit Flash	
Memory	Technology	Single channel DDR2 533/400 SODIMM	
	Capacity	Up to 1 GB with 1 slot	
Expansion	Onboard Expansion Slot	Two 32-bit/33 MHz PCI slots (Optional)	
Ethernet	Gigabit Ethernet	Four 10/100/1000 Mbps Marvell 8001 PCI-based GbE ports	
	Controller	VIA CX700	
Storage	IDE	ATA100 connector x 1 on IDE 0 (Secondary) Max. data transfer rate 100 MB/s Supports 3.5" ATA HDD	
	SATA	SATA connector x 1 Max. data transfer rate 150 MB/s Supports 3.5" SATA HDD	
	CompactFlash Socket	1 CF socket on IDE 0 (Primary/Master)	
	USB	2 USB 2.0	
Peripheral	LCD Display Module	1	
	Serial	1 RS-232	
	K/B, Mouse, LPT, CRT	Pin headers	
	Power	Watt	180 W
	Input	90 ~ 240 V AC, auto range	
Environment	Temperature	Operating	0 ~ 40° C (32 ~ 104° F)
		Non-Operating	-20 ~ 80° C (-4 ~ 167° F)
	Humidity	5 ~ 85 % @ 40° C (104° F)	5 ~ 95 %
	Dimensions (W x H x D)	426 x 44 x 337 mm (16.8" x 1.7" x 13.3")	
	Weight	4.5 kg (9.9 lb)	

## Dimensions

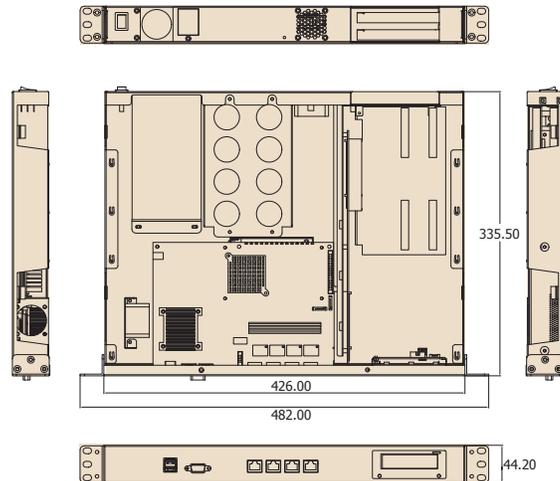

Unit: mm (inch)

## Ordering Information



Part Number	Processor	LAN	Power Supply	PCI Slot	CompactFlash	SDRAM	HDD
FWA-3300E	VIA C7 1.0 GHz	4	180 W	2	-	-	-

## Packing List

Part Number	Description
1701160101	VGA port cable (for system installation use)
1703080160	PS/2 Y cable mini-DIN 16 cm
1703092000	Console cable D-sub 9-pin 2 m

## Accessories

Part Number	Description
1702002600	3P 180 cm, USA
1702002605	3P 180 cm, Europe
1702031801	3P 180 cm, UK
1700000237	3P 180 cm, JP

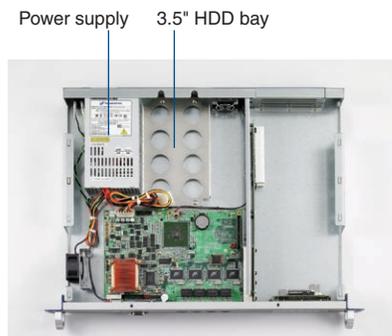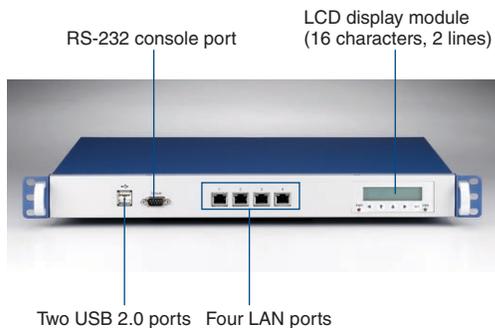

Two PCI slots (Optional)

Removable cover for easy maintenance and software upgrades



SDRAM socket CompactFlash socket