


PCI-6886

PCI Intel® Celeron® M Half-sized SBC with VGA/LCD/LVDS/LAN/USB 2.0/SATA and SSD

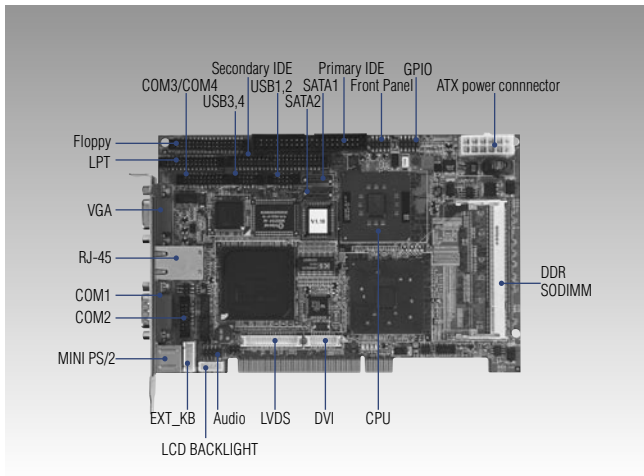

Features

- Embedded new generation Intel® Celeron® M Processor
- Supports 400 MHz Front Side Bus
- Supports 200 MHz, 266 MHz DDR SDRAM
- Supports up to 1000Base-T Ethernet on board
- Supports up to 2 Channel 36 bits LVDS for LCD
- Supports four USB 2.0 ports
- Supports two SATA ports

Specifications

General

- **CPU** Embedded Intel Celeron M Processor, up to 1 GHz
- **2nd Cache Memory** N/A
- **System Chipset** Intel 852GM/GMCH + 6300ESB
- **BIOS** AWARD® 4 Mbit Flash BIOS
- **System Memory** 2 x 200-pin DDR SODIMM, supports DDR up to 2 GB
- **Power Management** APM 1.2, ACPI supported
- **SSD** Supports CompactFlash® Card Type I/II (Share 2nd IDE channel)
- **Watch Dog Timer** 0 ~ 255 sec, System reset
- **Expansion Interface** 1 x 32-bit PCI slot
- **Battery** Lithium 3 V/196 mAH

I/O

- **I/O Interface** 2 x IDE, 1 x FDD, 1 x K/B, 1 x Mouse, 2 x SATA, 1 x RS-232/422/485, 3 x RS-232, 1 x LPT
- **USB** 4 x USB ports, USB 2.0 compliant
- **Audio** Supports AC97 Audio with optional PCM-231A-00A1
- **IrDA** N/A
- **GPIO** 8-bit general purpose input/output
- **I/O Expansion** DVI, PCI

Ethernet

- **Chipset** Intel 82541PI (Gigabit), Intel 82551ER/82551QM (optional)
- **Speed** 10/100 Mbps, 10/100/1000 Mbps
- **Interface** 1 x RJ-45
- **Standard** IEEE 802.3 z/ab (1000Base-T) or IEEE 802.3u (100 Base-T) protocol compatible
- **Built-in Boot ROM** 82541PI and 82551QM (optional)


Display

- **Chipset** Intel 852GM chip integrated. (Extreme Graphics 2)
- **Memory Size** Optimized Shared Memory Architecture, supports up to 64 MB frame buffer using system memory
- **Resolution** CRT display mode: up to 1600 x 1200 @ 32 bpp (85 Hz)
LVDS display mode: up to UXGA panel resolution with frequency range from 25 MHz to 112 MHz
- **LCD Interface** 2 Channel LVDS (36-bit)
- **LVDS Interface** Hirose connector supports dual channel LVDS panel
- **TV-Out** N/A
- **Dual Independent Display** CRT + LVDS, CRT + DVI (only operates under Windows), LVDS + DVI (only operates under Windows)

Mechanical and Environmental

- **Dimension (L x W)** 185 x 122 mm (7.3" x 4.8")
- **Weight** 0.27 kg (weight of total package)
- **Operating Temperature** 0 ~ 60° C (32 ~ 140° F), operation
- **Operating Humidity** 0% ~ 90% relative humidity, non-condensing
- **Power Supply Voltage** +5 V, +5 V STB and +12 V
- **Power Consumption** Max: 2.42 A @ 5 V, 0.32 A @ 12 V, (w/Celeron M 600 MHz with no L2 cache + 512 MB)
Typical: 1.91 A @ 5 V, 0.31 A @ 12 V, (w/Celeron M 600 MHz with no L2 cache + 512 MB)

Board Diagram

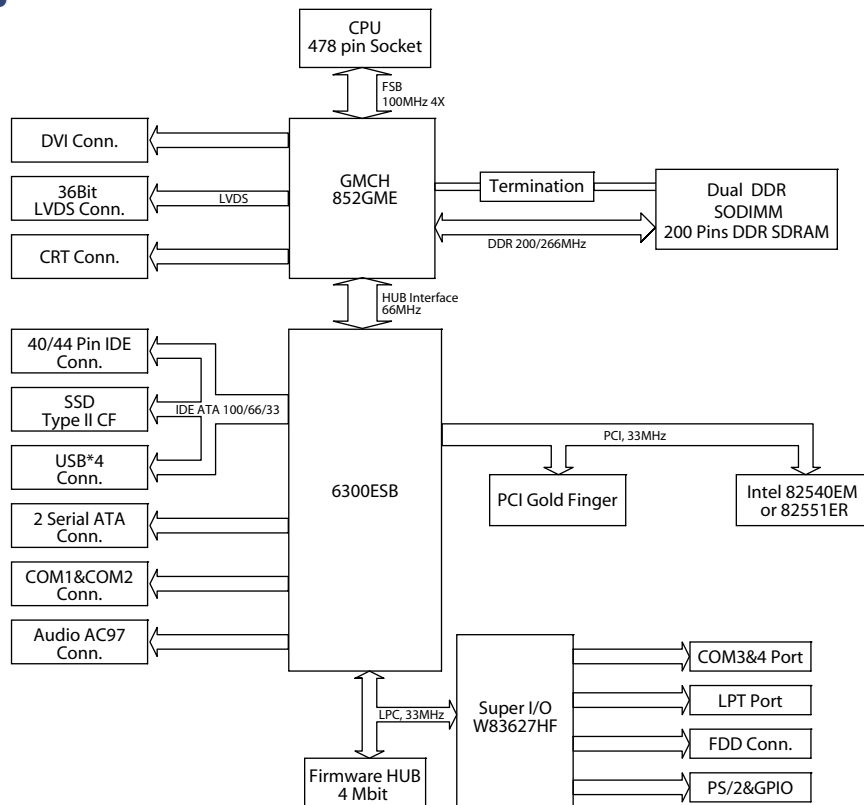

Packing List

- 1 x PCI-6886 SBC
- 1 x Y Cable for PS/2 Keyboard, PS/2 Mouse (p/n:1700060202)
- 1 x E-IDE (HDD) Cable (p/n:1701400452)
- 1 x FDD Cable (600 mm) (p/n:1701340603)
- 1 x Parallel Port Cable (p/n:1700260250)
- 1 x Power Cable (p/n:1700000265)
- 1 x ATX Feature Cable (p/n:1700001276)
- Mini Jumper (p/n:1653302122)
- 1 x Startup Manual
- 1 x Utility CD

Optional Accessories

- IPC-644P4-15ZE 4-slot PCI chassis w/backplane & 150 W power supply
- IPC-6806BP-20ZBE PCI chassis with 200 W power supply
- IPC-6606P5-30ZE 5-slot PCI chassis w/backplane & 200 W power supply
- PCA-6104P4-0B2E 4-slot PCI backplane
- PCA-6105P5-0B2E 5-slot PCI backplane
- 1703100260 USB cable adapter (2.00 mm)
- CF-HDD-ADP CompactFlash 50-pin to IDE 44-pin adapter
- PCM-231A-00A1E Audio module with Line-in, Line-out, Mic
- 1701140201 COM2 cable (2.00 mm)
- 1700001166 COM3 & COM4 cable with bracket (2.00 mm)

Ordering Information

Standard	CRT	LVDS	DVI	10/100	Giga	SATA	USB	RS-232	RS-232/422/485	LPT	GPIO	CF
PCI-6886F-M0A1E	1	1	1	1	--	2	4	3	1	1	8-bit	Type I/II
PCI-6886FG-M0A1E	1	1	1	--	1	2	4	3	1	1	8-bit	Type I/II
PCI-6886F-S0A1E	1	1	1	1	--	2	4	3	1	1	8-bit	Type I/II
PCI-6886FG-S0A1E	1	1	1	--	1	2	4	3	1	1	8-bit	Type I/II