


WebOIT-642 WebOIT-650

5.7" QVGA STN Web-enabled Operator Interface Terminal

6.4" VGA TFT Web-enabled Operator Interface Terminal

WebOIT-642

5.7" QVGA STN Web-enabled Operator Interface Terminal

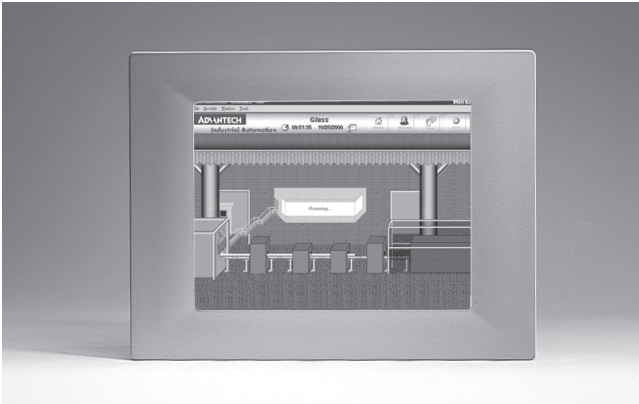

- **CPU:** Intel® StrongARM 1110 processor
- **Construction:** Plastic molding
- **RAM:** 16 MB DRAM on board
- **Flash:** 16 MB on board
- **Storage:** Supports one CompactFlash™ disk
- **Display type:** STN color dot matrix type LCD
- **LCD resolution:** up to 320 x 240 @ 256 colors
- **Touch screen:** 4-wire, analog resistive
- **Built-in Ethernet (LAN):** 10Base-T interface
- **Serial ports:** One serial RS-232 port, one serial RS-232/422/485 port (DIP switch settings)
- **PS/2 keyboard/mouse connector:** Mini-DIN keyboard connectors
- **Water resistance:** Front panel meets NEMA4 or IP65
- **Dimensions (W x H x D):** 195 x 148 x 40 mm (7.68" x 5.83" x 1.57")
- **Weight:** 1.3 kg (2.86 lbs)

Ordering Information

- **WebOIT-642:**
5.7" QVGA STN Web-enabled Operator Interface Terminal
- **ASTUDIO-WNT/DEV**
Advantech Studio for eAutomation Development Edition
- **PS-DC24-50:**
110/220 V_{AC} to 24 V_{DC}, 50 watts power adapter

WebOIT-650

6.4" VGA TFT Web-enabled Operator Interface Terminal



- **CPU:** Intel® Pentium®266 MMX™
- **Construction:** Plastic molding with optional metal PC/104 expansion cover
- **RAM:** 32 MB SDRAM
- **Storage:** Supports one CompactFlash™ disk
- **Display type:** TFT color dot matrix type LCD
- **LCD resolution:** up to 640 x 480 @ 256K colors
- **Touch screen:** 4-wire, analog resistive
- **Built-in Ethernet (LAN):** 10/100Base-T interface
- **Serial ports:** One serial RS-232 port, one serial RS-232/422/485 port (DIP switch settings)
- **PS/2 keyboard/mouse connector:** Mini-DIN keyboard connector
- **Water resistance:** Front panel meets NEMA4 or IP65
- **Expansion Slot:** Supports up to one 16-bit PC/104 cards with +5 V and +12 V only
- **Dimensions (W x H x D):** 220 x 160 x 57 mm (8.66" x 6.30" x 2.24")
- **Weight:** 1.7 kg (3.7 lbs)

Ordering Information

- **WebOIT-650**
6.4" VGA TFT Web-enabled Operator Interface Terminal
- **ASTUDIO-WNT/DEV**
Advantech Studio for eAutomation Development Edition
- **PS-DC24-50:**
110/220 V_{AC} to 24 V_{DC}, 50 watts power adapter

WebLink
WebOIT 1

IPPC &
AWS 2

TPC 3

FPM 4

IPC 5

INET 6

DA&C 7

ADAM-
3000 8

ADAM-
4000 9

ADAM-
5000 10

ADAM-
6000 11

Software 12

UNO-
2000 13

FMS-
3000 14

Index