

9-pin RS-232 Line Booster

Model BB-232LB9R

B+B SMARTWORX

Powered by

ADVANTECH

www.advantech-bb.com



PRODUCT FEATURES

- + Amplify and extend RS-232 signals beyond 15.24m (50 ft) limit
- + Daisy-chain multiple repeaters for even extra range
- + Boost lower power RS-232 ports
- + Data rates up to 115.2 kbps
- + Quick, convenient in-line installation
- + Power supply required (not included, sold separately)

OVERVIEW

Model BB-232LB9R is a 9-pin RS-232 repeater that re-transmits all 8 signals and carries the ground line through. Many computers, laptops and desktops feature low-power versions of RS-232 ports that are unable to drive port-powered devices or full-length RS-232 cabling.

Model BB-232LB9R amplifies these weak signals up to the RS-232 Standard for uses such as running port-powered devices (see Figure 1). It is suitable for extending full-powered RS-232 cable runs beyond the typical 15 to 30 meters (50-100 ft) distance.(see Figure 2).

An external power supply is required, not included, sold separately.
Model BB-SMi6-12V-P230C1 is recommended.

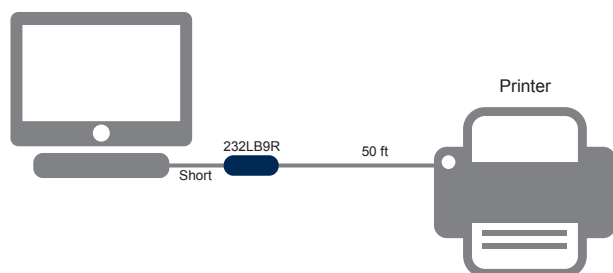


Figure 1. Boosting Low-power Ports

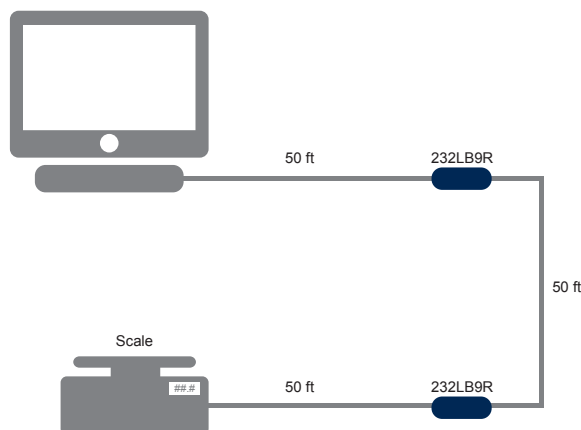


Figure 2. Extending Cable Runs

ORDERING INFORMATION

MODEL NO.	DESCRIPTION
BB-232LB9R	9-pin RS-232 Line Repeater, DB9F to DB9M

ACCESSORIES - sold separately

BB-SMi6-12V-P230C1 - power supply, 12 VDC, 6 Watt, 2.5mm plug, international AC input

BB-9PAMF6 - DB9 male to female cable, 1.83 m (6 ft)

SPECIFICATIONS

SERIAL TECHNOLOGY	
DCE Connector	DB9 female
DTE Connector	DB9 male
Data Rate	Up to 115.2 kbps
POWER	
Supply Voltage	+12 to +16 VDC @ 40mA, maximum
MECHANICAL	
Dimensions	7.9 x 4.3 x 2.1 cm (3.1 x 1.7 x 0.8 in)
ENVIRONMENT	
Temperature Range	0 to +70 °C (+32 to +158 °F)
REGULATORY APPROVALS, STANDARDS, DIRECTIVES	
FCC Class B, CE	
CE - Directives	EMC - 2014/30/EU RoHS - 2011/65/EU

All product specifications are subject to change without notice.

BB-232LB9R_4818ds