EKI-2428G-4FA

24GE+4G SFP Port L2 Unmanaged Switch with AC Input



Features

- 24 x Gigabit copper ports + 4 x Gigabit SFP ports
- SFP socket for easy and flexible fiber expansion
- Provides 8K MAC address
- 100~240 V_{AC} power input



Introduction

The EKI-2428G is an unmanaged switch with 24 Gigabit ports and 4 Gigabit SFP ports. It is designed for rack-mount installation, and suitable for edge to core industrial networks. The wire speed across all ports up to 56 Gbps for L2 traffic forwarding.

Specifications

Communications

Standard
IEEE 802.3, 802.3u, 802.3x, 802.3ab, 802.3z
LAN
10/100/1000BASE-TX, optional 100BASE-FX, 1000BASE-SX/LX/LHX/XD/ZX/EZX

• Transmission Distance Ethernet: Up to 100 m (4- wire Cat.5e, Cat.6 RJ45

cable suggested for Gigabit port) SFP: Up to 110 km (depends on SFP)

• Transmission Speed Gigabit Copper: 10/100/1000 Mbps, Auto-Negotiation

Gigabit Fiber: Up to 1000 Mbps

Interface

Connectors
24 x RJ45 (Ethernet)
4 x SFP (mini-GBIC) ports

• **LED Indicators** 10/100T (X): Link/Activity, Duplex/Collision

Gigabit Copper: Link/Activity, Speed (1000 Mbps)

SFP: Link/Activity

Debug Port RS-232 (RJ45)

Mechanism

Enclosure Metal shell with solid mounting kits
Dimensions (W x H x D) 442 x 44 x 211.1 mm (17.4" x 1.73" x 8.31")

• Mounting 1U 19" Rack mount

Power

Power Consumption 18W

Power Input
100~240V single AC power input

Protection

Power Reverse PresentOverload Current Present

Environment

Operating Temperature 0 ~ 55°C (32 ~ 131°F)
Storage Temperature -20 ~ 70°C (-4 ~ 158°F)
Operating Humidity 10 ~ 95% (non-condensing)
Storage Humidity 10 ~ 95% (non-condensing)

CE FCC Class A


■ **MTBF** 620,427 hours

Certification

- EMI

•	EMS	EN 61000-4-2
		EN 61000-4-3
		EN 61000-4-4
		EN 61000-4-5
		EN 61000-4-6
		EN 61000-4-8
•	Shock	IEC 60068-2-27
-	Freefall	IEC 60068-2-32
-	Vibration	IEC 60068-2-6



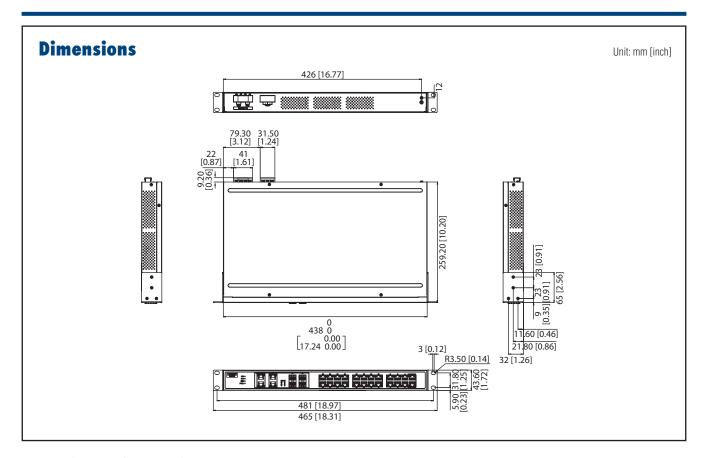

Ordering Information

EKI-2428G-4FA-AE 24GE+4G SFP Port Unmanaged Ethernet Switch