



WBK10A™

8-Channel Analog Expansion Module



Compatibility: ✓ WaveBook


Features

- Adds eight differential voltage input channels to the WaveBook™
- Operates from 10 to 30 VDC
- Accepts one WBK11A™, WBK12A™, or WBK13A™ low-pass filter & simultaneous sample and hold option

The WBK10A™ provides seamless expansion of eight voltage channels on any WaveBook™ system. The WBK10A integrates automatically into existing systems for effortless expansion without compromising throughput or timing.

WBK10A functions as an integral part of the WaveBook data acquisition system, taking full advantage of its scan sequencer to control channel gains over all channels. As a result, all expansion channels can be randomly accessed and are available to contribute to multichannel triggering.

Like the WaveBook, the WBK10A can operate from a standard AC line, an optional rechargeable battery supply, a 12V car battery, or any 10 to 30 VDC supply.

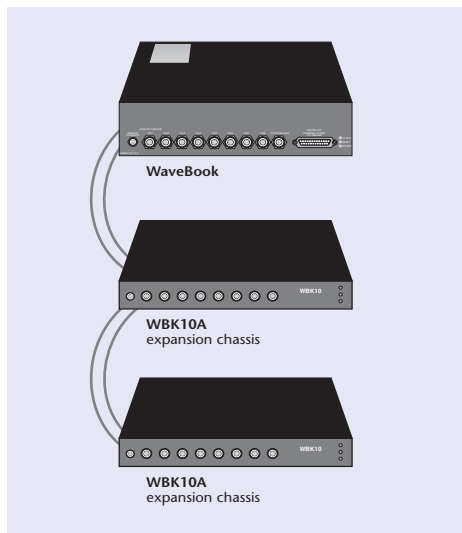

The WBK10A has a small form factor, letting you expand your system without expanding your space requirements



The WBK10A adds eight differential analog inputs to your WaveBook system

Specifications (18° to 28°C)

Warm-up: 30 minutes to rated specifications

Environment

Operating: 0 to 50°C; 0 to 95% humidity, non-condensing

Storage: -20° to +70°C

Power: 0.35A @ 15V

Dimensions: 285 mm W x 220 mm D x 35 mm H (11" x 8.5" x 1.375")

Weight: 1.3 kg (2.8 lbs)

Connector: BNC

Channels: 8 differential

Maximum Overvoltage: 35 VDC

Ranges: Fully software selectable

Unipolar: 0 to ±10V, 0 to +5V, 0 to +2V, 0 to +1V

Bipolar: ±10V, ±5V, ±2V, ±1V, ±0.5V

Input Bandwidth: DC to 500 kHz

Input Impedance: 5M Ohm (single-ended); 10M Ohm (differential) in parallel with 30 pF

Total Harmonic Distortion: -84 dB (DC to 20 kHz)

Anti-Alias Filter

Type: 5 pole Butterworth; 20 kHz low pass software enabled*

Power: 0.35A @ 15V

Accuracy & Noise		
Range	Accuracy	Noise (rms)
0 to 10V, 0 to 5V	±0.012% reading; ±0.009% range	2 LSB
0 to 2V	±0.012% reading; ±0.012% range	3 LSB
0 to 1V	±0.012% reading; ±0.018% range	3 LSB
±10V, ±5V, ±2V	±0.012% reading; ±0.009% range	2 LSB
±1V	±0.018% reading; ±0.012% range	3 LSB
±0.5V	±0.018% reading; ±0.018% range	5 LSB

Ordering Information

Description 8-channel expansion module including AC adapter and cables **Part No.** WBK10A

Accessories & Cables

Rack mount kit **RackDBK2**

5-pin male DIN to 5-pin male DIN provides convenient connection between WaveBook power input connectors and DBK30A (also used to daisy-chain input power to expansion modules) **CA-115**

CE Compliant Cables

1 male BNC to male BNC **CA-150-1**

8 male BNC to male BNC **CA-150-8**

For complete information on accessories and cables, visit www.iotech.com/acc

Related Products

WaveBook Series

WBK11A

WBK12A

WBK13A

WBK61

WBK62

* See WBK12A or WBK13A for other filter options