

Power Control and Monitor Unit

- 1U low profile
- 19-inch rack mounting
- **I²C decoder, control and monitor up to 3 RCP-1000-□-C units**
- Suitable for all kinds of RCP output (12V,24V,48V)
- Digital meters for output voltage, output current, and internal temperature on front panel
- Potentiometer for adjusting output voltage of RCP-1000 unit on front panel
- Relay contacts and LED indicators for AC fail, DC fail, and over temperature warning
- Removable fixing accessory
- 3 years warranty



AC input voltage range 90~264VAC
 AC inrush current Cold start, 30A at 115VAC, 50A at 230VAC
 Relay contact rating 30VDC, 1A
 Working temperature -20~+60°C (refer to output derating curve)
 Safety standards Design refer to UL60950-1, TUV EN60950-1
 Withstand voltage I/P-O/P:3kVAC, I/P-FG:1.5kVAC, O/P-FG:0.5kVAC
 Isolation resistance I/P-O/P, I/P-FG, O/P-FG: 100M Ohms/500VDC
 EMC standards Compliance to EN55022, EN61000-3-2,-3, EN61000-4-2,3,4,5,6,8,11
 Connection Screw DIN terminal for AC input and relay contact output; D-Type right angle 25 positions for communication port

Model No.	Application
RCP-MU	Control and monitor RCP-1000 series

1U Rack Control and Monitoring Unit

- 1U low profile
- 19-inch rack mounting
- Control and monitor up to 32 RCP-2000 units
- Front panel LCD and buttons for on-site service without PC
- Alarm/event log with time and date
- Windows-based PC communication
- software
- USB, RS-232 or Ethernet interface for PC connection locally or remote monitoring and control via GSM modem
- Easy wire connections on rear side
- 4 user programmable relay outputs for traditional remote or warning
- 3 years warranty




DC input voltage range 12~15VDC
 DC input current 1A at 12VDC, 0.8A at 15VDC
 Output relay contact 4 user programmable relay
 Working temperature -25~+70°C (refer to output derating curve)
 Safety standards UL60950-1, TUV EN60950-1 approved for RKP-1U□-CMU1
 Withstand voltage I/P-O/P:3kVAC, I/P-FG:1.5kVAC
 Isolation resistance I/P-O/P, I/P-FG: 100M Ohms / 500VDC / 25°C / 70%RH
 EMC standards Compliance to EN55022 Class B, EN61000-4-2,3,4,5,6,8,11, EN61000-6-1 light industry level

Model No.	Application
RKP-CMU1	Control and monitor RCP-2000 series (single unit)
RKP-1U□-CMU1	Control and monitor RCP-2000 series (with 19" rack)


Custom-Made 19" 2U Rack Power System

- Standard 19" 2U rack – 480 x 420 x 80mm
- Custom rack configurations available, 4500W max., up to 8 outputs
- LED indicators on front panel
- Meters for output voltage and current on front panel
- Front panel voltage adjustment
- Wide range of backplane connection option
- Choose from MEAN WELL's wide range of standard power supply
- Complete assembly and testing on your custom rack system
- Engineering support available to assist you in specifying your requirement
- 2 years warranty

Panel Type A: with power switch, LED indicators, and output adjustment potentiometers.

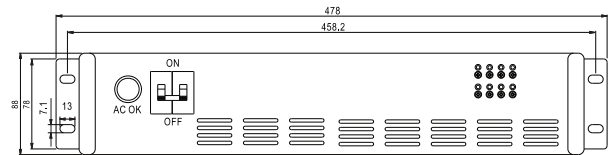

Panel Type B: with additional digital meters and selector switch.

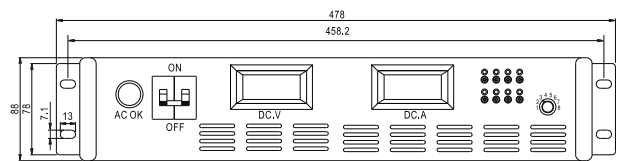

Example

❖ 4500W~6000W 2U Rack System

- RSP-1500x 3pcs (Page 10); RSP-3000x 2pcs (Page 11)
- LED indicators and front panel voltage adjustment
- Output voltage and current digital meters
- I/O interface:
 AC Input — Terminal block
 DC Output — Copper pillars
 Single Output — Terminal block



Who can provide you better services and be a trustworthy partner in the power industry?

— "MEAN WELL" tries to be —



To satisfy our customers is our goal —

- High Quality
- Low Cost
- Prompt Delivery
- Best Service