

PT-7710 Series

IEC 61850-3 / EN50155 8+2G-port Gigabit modular managed rackmount Ethernet switches



- > IEC 61850-3, IEEE 1613 (power substations), NEMA TS2 (traffic control systems), and EN50155/EN50121-4 (railway applications) compliant
- > IEEE 1588 PTP for precise time synchronization of networks
- > Up to 12 ports with M12 connectors
- > Turbo Ring, Turbo Chain, and IEEE 802.1D-2004 RSTP/STP for Ethernet redundancy
- > Universal power supply range, 12/24/48 VDC or 110/220 VDC/VAC
- > NERC CIP compliance
- > -40 to 85°C operating temperature range



IEC 61850-3 / IEEE 1613



EN50155



NEMA TS2



Introduction

The PowerTrans PT-7710 is designed to meet the demands of power substation automation systems (IEC 61850-3, IEEE 1613), traffic control systems (NEMA TS2), and railway applications (EN50155/EN50121-4). The PT-7710's Gigabit and fast Ethernet backbone, redundant ring, and 12/24/48 VDC dual redundant power supplies

or 110/220 VDC/VAC power supplies increase the reliability of the communications and reduce cabling and wiring costs. The modular design of the PT-7710 makes network planning easy, and allows greater flexibility by letting you install up to 2 Gigabit ports and 8 fast Ethernet ports, or 10 fast Ethernet ports.

General Features and Benefits

- IPv6 Ready logo awarded (IPv6 Logo Committee certified)
- IEEE 1588 PTP (Precision Time Protocol) for precise time synchronization of networks
- DHCP Option 82 for IP address assignment with different policies
- Modbus/TCP industrial Ethernet protocol supported
- Turbo Ring, Turbo Chain, and IEEE 802.1D-2004 RSTP/STP
- IGMP snooping and GMRP for filtering multicast traffic from industrial Ethernet protocols
- IEEE 802.3ad, LACP for optimum bandwidth utilization
- Bandwidth management prevents unpredictable network status
- Multi-port mirroring for online debugging
- Automatic warning by exception through email, relay output
- RMON for efficient network monitoring and proactive capability
- Automatic recovery of connected device's IP addresses
- Line-swap fast recovery
- Configurable by Web browser, Telnet/Serial console, Windows utility, and ABC-01 automatic backup configurator

Cyber-security Features

- User passwords with multiple levels of security protect against unauthorized configuration
- SSH/HTTPS is used to encrypt passwords and data
- Lock switch ports with 802.1x port-based network access control so that only authorized clients can access the port
- Disable one or more ports to block network traffic
- 802.1Q VLAN allows you to logically partition traffic transmitted between selected switch ports
- Secure switch ports so that only specific devices and/or MAC addresses can access the ports
- Radius/TACACS+ allows you to manage passwords from a central location (available in Q1 Y2011)
- SNMPv3 provides encrypted authentication and access security


Specifications

Technology

Standards:

- IEEE 802.3 for 10BaseT
- IEEE 802.3u for 100BaseT(X) and 100Base FX
- IEEE 802.3ab for 1000BaseT(X)
- IEEE 802.3z for 1000BaseX
- IEEE 802.3x for Flow Control
- IEEE 802.1D for Spanning Tree Protocol
- IEEE 802.1w for Rapid STP
- IEEE 802.1Q for VLAN Tagging
- IEEE 802.1p for Class of Service
- IEEE 802.1X for Authentication
- IEEE 802.3ad for Port Trunk with LACP

Modular Rackmount Ethernet Switch System, PT-7710

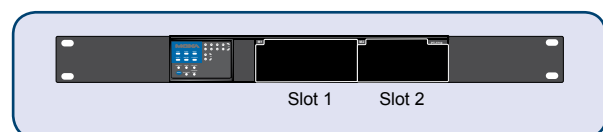

Protocols: IGMPv1/v2 device, GMRP, GVRP, SNMPv1/v2c/v3, DHCP Server/Client, BootP, TFTP, SNTP, SMTP, RARP, RMON, HTTP, HTTPS, Telnet, SSH, Syslog, DHCP Option 66/67/82, LLDP, Modbus/TCP, IEEE 1588 PTP, IPv6, SNMP Inform

MIB: MIB-II, Ethernet-like MIB, P-BRIDGE MIB, Q-BRIDGE MIB, Bridge MIB, RSTP MIB, RMON MIB Group 1, 2, 3, 9
Flow Control: IEEE 802.3x flow control, back pressure flow control

Switch Properties

Priority Queues: 4
Max. Number of Available VLANs: 64
VLAN ID Range: VID 1 to 4094
IGMP Groups: 256

Interface

Fast Ethernet: Slot 1 for any combination of 4, 6, 7, or 8-port PM-7200 fast Ethernet modules with 10/100BaseT(X) (TP/M12 interface), 100BaseFX (SC/ST connector), or 100BaseSFP; Slot 2 for 1 or 2-port interface modules with 100BaseFX (SC/ST connector)
Gigabit Ethernet: Slot 2 for 2-port PM-7200 Gigabit Ethernet combo module, 100/1000BaseT(X) or 1000BaseSFP
Console Port: RS-232 (RJ45)
System LED Indicators: STAT, PWR1, PWR2, FAULT, MSTR/HEAD, CPLR/TAIL
Mode LED Indicators: LNK/ACT, FDX/HDX, RING PORT, COUPLER PORT, SPEED
Alarm Contact: 1 relay output with current carrying capacity of 3 A @ 30 VDC or 3 A @ 240 VAC

Power Requirements

Input Voltage:
 • 12/24/48 VDC (9 to 60 V)
 • 110/220 VDC/VAC (88 to 300 VDC and 85 to 264 VAC)
Input Current: (all ports are equipped with fiber)
 • Max. 0.81 A @ 24 VDC
 • Max. 0.42 A @ 48 VDC
 • Max. 0.17/0.10 A @ 110/220 VDC
 • Max. 0.20/0.12 A @ 110/220 VAC

Overload Current Protection: Present
Connection: 10-pin terminal blocks
Reverse Polarity Protection: Present
Physical Characteristics
Housing: IP30 protection
Dimensions: 266.5 x 44 x 195 mm (10.5 x 1.7 x 7.7 in)
Weight: 2200 g
Installation: 19" rack mounting, wall mounting (with optional kit)

Environmental Limits

Operating Temperature: -40 to 85°C (-40 to 185°F); cold start requires min. of 100 VAC at -40°C
Storage Temperature: -40 to 85°C (-40 to 185°F)
Ambient Relative Humidity: 5 to 95% (non-condensing)

Regulatory Approvals

Safety: UL60950-1, CSA C22.2 No. 60950-1, EN60950-1
EMI: FCC Part 15, CISPR (EN55022) class A
Power Automation: IEC 61850-3, IEEE 1613
Traffic Control: NEMA TS2
Rail Traffic: EN50155, EN50121-4


Note: Please check Moxa's website for the most up-to-date certification status.

Warranty


Warranty Period: 5 years
Details: See www.moxa.com/warranty

Dimensions

Rack Mounting

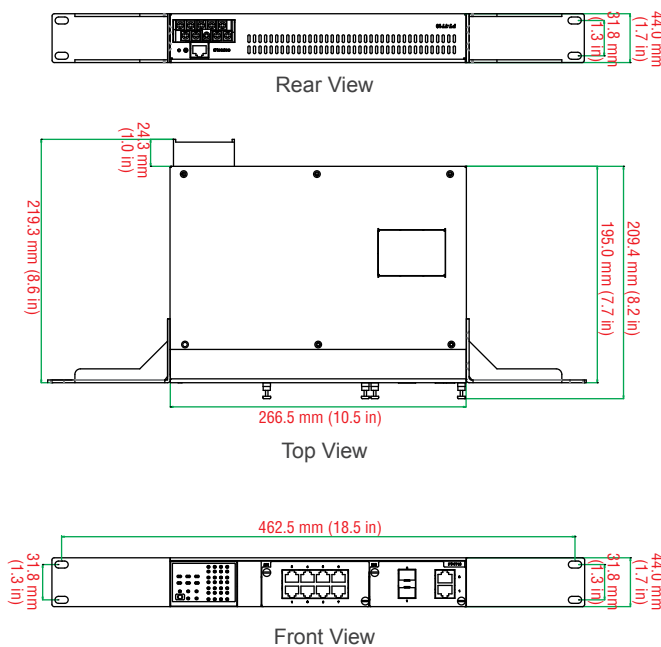

Wall Mounting

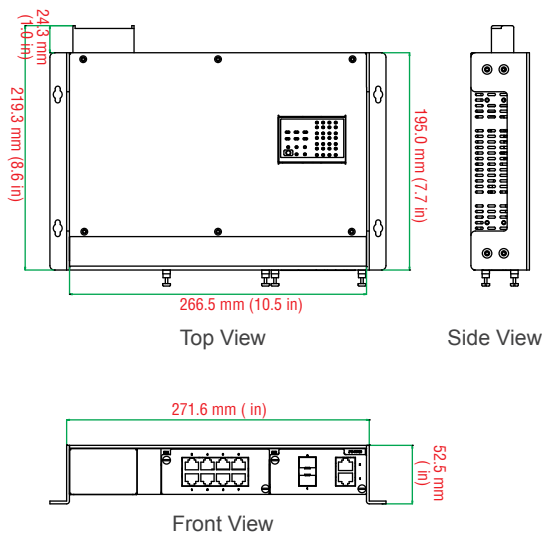

Ordering Information

Step 1: Select Ethernet switch system

Step 2: Select interface modules

PT-7710 with power supply



PM-7200 modules
(Gigabit or fast Ethernet)

Note: The PT-7710 Ethernet switch system is delivered without interface module. See page 2-39 to choose PM-7200 interface modules.

PT-7710 Modular Rackmount Ethernet Switch System

The PT-7710 switch system consists of 4 modular managed rackmount Ethernet switch systems with 1 slot for a fast Ethernet module, and 1 slot for a fast Ethernet or Gigabit Ethernet module. A total of 10 or 8+2G ports can be installed, and the switch can be used in a temperature range from -40 to 85°C.

Available Models		Power Supply	
Rackmounting, Front Cabling, Front Display	Wall mounting, Down Cabling, Front Display	LV: 12/24/48 VDC (9 to 60 V) (Dual power inputs)	HV: 88 to 300 VDC and 85 to 264 VAC, isolated
PT-7710-F-LV	PT-7710-D-LV	1	–
PT-7710-F-HV	PT-7710-D-HV	–	1

Note: The PT-7710 Ethernet switch systems provide 1 slot for a Gigabit Ethernet interface module and 1 slot for a fast Ethernet interface module. See page 2-39 to select the PM-7200 Gigabit Ethernet and fast Ethernet interface modules that you need for your own application.



Gigabit/Fast Ethernet Modules for the PT-7710

	Interface Modules																								
	PM-7200-4GTXSFP	PM-7200-2GTXSFP	PM-7200-1MSC	PM-7200-1MST	PM-7200-2MSC	PM-7200-2MST	PM-7200-1SSC	PM-7200-2SSC	PM-7200-8TX	PM-7200-2MSC4TX	PM-7200-2MST4TX	PM-7200-2SSC4TX	PM-7200-4MSC2TX	PM-7200-4MST2TX	PM-7200-4SSC2TX	PM-7200-6MSC	PM-7200-6MST	PM-7200-6SSC	PM-7200-1LS06TX	PM-7200-1MST6TX	PM-7200-1SSC6TX	PM-7200-1MSC6TX	PM-7200-8PoE	PM-7200-8SFP	PM-7200-4M12
Slot 1	–	–	–	–	–	–	–	–	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	–	–	✓	✓
Slot 2	–	✓	✓	✓	✓	✓	✓	✓	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–

Optional Accessories (can be purchased separately)

MXview: Moxa industrial network management software with 50, 100, 250, or 500 nodes

EDS-SNMP OPC Server Pro: OPC server software that works with all SNMP devices

ABC-01: Configuration backup and restoration tool for managed Ethernet switches, 0 to 60°C operating temperature

PM-7200 Series

Gigabit and fast Ethernet modules for PT and IKS series switches

Specifications

Gigabit Ethernet Interface Modules, PM-7200-2G/4G series



PM-7200-4GTXSFP



PM-7200-2GTXSFP

Interface

RJ45 Ports: 10/100/1000BaseT(X) auto negotiation speed, and auto MDI/MDI-X connection

Fiber Ports: 1000BaseSFP slots

Note: The PM-7200-2G/4G series Gigabit Ethernet combo modules support 2 or 4 SFP slots. See page 1-69 to select the SFP-1G series Gigabit Ethernet modules for your application.

Fast Ethernet Interface Modules, PM-7200 series



PM-7200-8TX



PM-7200-6MSC
PM-7200-6SSC



PM-7200-6MST



PM-7200-4MSC2TX
PM-7200-4SSC2TX



PM-7200-4MST2TX



PM-7200-2MSC4TX
PM-7200-2SSC4TX



PM-7200-2MST4TX



PM-7200-1LSC6TX



PM-7200-2MSC
PM-7200-2SSC



PM-7200-2MST



PM-7200-1MSC
PM-7200-1SSC



PM-7200-1MST



PM-7200-1MST6TX



PM-7200-1MSC6TX
PM-7200-1SSC6TX



PM-7200-8PoE

COMING SOON



PM-7200-8SFP*



PM-7200-4M12

* See page 1-69 to select SFP-1G/1FE series Gigabit Ethernet and fast Ethernet modules.

Interface

RJ45 Ports: 10/100BaseT(X) auto negotiation speed, F/H duplex mode, and auto MDI/MDI-X connection

Fiber Ports: 100BaseFX ports (SC/ST or SFP LC connector)

PoE Ports: IEEE 802.3af Power-over-Ethernet Technology, provide up to 15.4 watts per port

M12 Ports: 10/100BaseT(X) auto negotiation speed, and auto MDI/MDI-X connection

Optical Fiber

	100BaseFX		
	Multi-mode	Single-mode	Single-mode, 80 km
Wavelength	1300 nm	1310 nm	1550 nm
Max. TX	-10 dBm	0 dBm	0 dBm
Min. TX	-20 dBm	-5 dBm	-5 dBm
RX Sensitivity	-32 dBm	-34 dBm	-34 dBm
Link Budget	12 dB	29 dB	29 dB
Typical Distance	5 km a 4 km b	40 km c	80 km d
Saturation	-6 dBm	-3 dBm	-3 dBm

- a. 50/125 μm, 800 MHz*km fiber optic cable
- b. 62.5/125 μm, 500 MHz*km fiber optic cable
- c. 9/125 μm single-mode fiber optic cable
- d. 9/125 μm single-mode fiber optic cable (80 km)

Ordering Information

Rackmount Ethernet Switch System and Interface Module Compatibility Chart

	Interface Modules																								
	PM-7200-4GTXSFP	PM-7200-2GTXSFP	PM-7200-1MSC	PM-7200-1MST	PM-7200-2MSC	PM-7200-2MST	PM-7200-1SSC	PM-7200-2SSC	PM-7200-8TX	PM-7200-2MSC4TX	PM-7200-2MST4TX	PM-7200-2SSC4TX	PM-7200-4MSC2TX	PM-7200-4MST2TX	PM-7200-4SSC2TX	PM-7200-6MSC	PM-7200-6MST	PM-7200-6SSC	PM-7200-1MSC6TX	PM-7200-1MST6TX	PM-7200-1SSC6TX	PM-7200-1LSC6TX	PM-7200-8PoE	PM-7200-8SFP*	PM-7200-4M12
PT-7828	✓	✓	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓
PT-7728	✓	✓	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓
PT-7710	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓
IKS-6726	-	✓	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓
IKS-6726-PoE	-	✓	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
IKS-6324	-	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

* If you are using an SFP-1FELLC module, the operating temperature is limited to -40 to 75°C (-40 to 167°F).

Gigabit Ethernet Modules for PT and IKS Series Rackmount Ethernet Switches, PM-7200-2G/4G Series

Available Models	Port Interface
	Combo Port, 10/100/1000BaseT(X) or 1000BaseSFP*
PM-7200-2GTXSFP	2
PM-7200-4GTXSFP	4

*The PM-7200-2G/4G series Gigabit Ethernet combo modules support 2 or 4 SFP slots.

Fast Ethernet Modules for PT and IKS Series Rackmount Ethernet Switches, PM-7200 Series

Available Models	Port Interface							
	10/100BaseT(X)			100BaseFX				100BaseSFP
	TP	PoE	M12	Multi-mode, SC Connector	Multi-mode, ST Connector	Single-mode, SC Connector	Single-mode, SC Connector, 80 km	
PM-7200-8TX	8	–	–	–	–	–	–	–
PM-7200-6MSC	–	–	–	6	–	–	–	–
PM-7200-6MST	–	–	–	–	6	–	–	–
PM-7200-6SSC	–	–	–	–	–	6	–	–
PM-7200-4MSC2TX	2	–	–	4	–	–	–	–
PM-7200-4MST2TX	2	–	–	–	4	–	–	–
PM-7200-4SSC2TX	2	–	–	–	–	4	–	–
PM-7200-2MSC4TX	4	–	–	2	–	–	–	–
PM-7200-2MST4TX	4	–	–	–	2	–	–	–
PM-7200-2SSC4TX	4	–	–	–	–	2	–	–
PM-7200-1LSC6TX	6	–	–	–	–	–	1	–
PM-7200-2MSC	–	–	–	2	–	–	–	–
PM-7200-2MST	–	–	–	–	2	–	–	–
PM-7200-2SSC	–	–	–	–	–	2	–	–
PM-7200-1MSC	–	–	–	1	–	–	–	–
PM-7200-1MST	–	–	–	–	1	–	–	–
PM-7200-1SSC	–	–	–	–	–	1	–	–
PM-7200-1MSC6TX	6	–	–	1	–	–	–	–
PM-7200-1MST6TX	6	–	–	–	1	–	–	–
PM-7200-1SSC6TX	6	–	–	–	–	1	–	–
PM-7200-8PoE	–	8	–	–	–	–	–	–
PM-7200-8SFP	–	–	–	–	–	–	–	8
PM-7200-4M12	–	–	4	–	–	–	–	–