


System

MS-9A08

MS-9A08

Intel® 45nm Core™ 2 Duo Embedded System

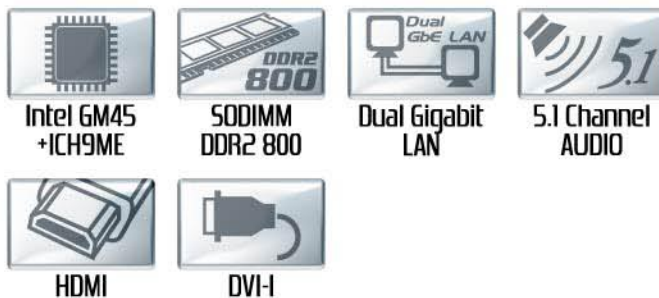

Features

- Intel® 45nm Core™ 2 Duo design with small dimension chassis
- Intel® GM45 chipset
- Multiple Video Output: HDMI, DVI and VGA with dual independent display
- Support DirectX 10®, Shader Model 4.0, and Intel® Clear Video technology

System

Processor	Intel® Core™ 2 Extreme, Core™ 2 Quad, Core™ 2 Duo, Celeron® M processor(Penryn)
Chipset	Intel® GM45 + ICH9ME
Memory	2 * DDR2 667/800 SO-DIMM, up to 4GB
Display Port	DVI-I, HDMI
USB	6 * USB 2.0 Port (4 * Rear, 2 * Front)
I/O	Rear I/O: 1 * Powered RS-232/422/485 (0V, 5V, 12V) Front: 3 * RS-232
LAN	2 * Intel® GbE LAN
Audio	5.1 Channel HD Audio
Storage	1 * SATA II 2.5" HDD
Application	Digital Signage, Kiosk, Gaming, Thin Client

Power Specification

Power Source	DC Power
--------------	----------

Mechanical and Environmental

Dimension	180mm * 180mm * 44mm (L x W x H)
Operating Temperature	0°C to 40°C
Storage Temperature	-20°C to 80°C
Regulatory Compliance	FCC Class B/ CE / C-Tick / BSMI / VCCI RoHS Compliant

Ordering Information

Part Number	Description
709-9A08-010	GM45+ICH9ME, 2 * DDR2 SO-DIMM, Dual Intel GbE LAN, 1* SATA, DVI-I, HDMI
S93-0406220-A69	Power Adaptor, 19V, 4.74A, 90W
605-6894-010	802.11 b/g, mini-card, PCIe
605-6890-010	802.11 b/g/n, mini-card, PCIe
605-6877-010	802.11 b/g, mini-card, USB 2.0
605-6837D-070	Bluetooth 2.0 EDR, USB 2.0(8 pin connector)
605-6837D-160	Bluetooth 2.1 EDR, USB 2.0 (8 pin connector)