
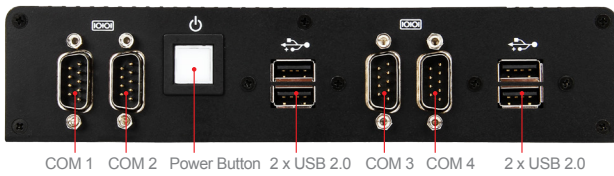


**Coming Soon**

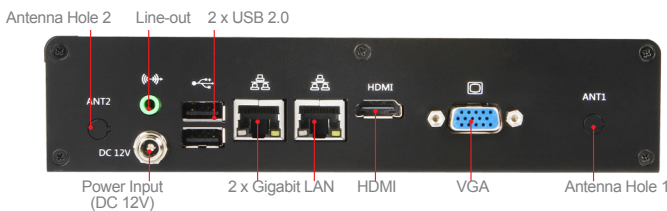

## Features

- Ultra low power with fanless design
- Support dual independent displays with VGA and HDMI
- Support DDR3 SO-DIMM up to 4GB
- Support dual Intel GbE LAN
- Support dual Mini-PCIe for expansion

## Ordering Information

Part Number	Description
Coming soon	

## Packing List

Part Number	Description
Coming soon	

## Specifications

<b>System Processor</b>	CPU	Intel® Atom™ D2550 processor	
	CPU Type	Onboard	
	Chipset	Intel® NM10 Express	
	BIOS	AMI 32Mbit SPI	
<b>Memory</b>	Technology	Single-channel DDR3 1066MHz (non-ECC)	
	Max. Capacity	Up to 4GB	
	Socket	1 x 204-pin SO-DIMM	
<b>Graphic</b>	Graphic Controller	Intel® GMA3650 Graphics	
	Display Mode	Dual independent display supported	
<b>Ethernet</b>	Controller	2 x Intel® 82583V GbE LAN	
<b>Audio</b>	Controller	Realtek® ALC887 HD Audio Codec	
<b>H/W Monitor</b>	Watchdog Timer	255-level Watchdog Timer	
	Smart Fan	N/A	
<b>TPM</b>	Controller	N/A	
<b>Expansion Slot</b>	PCIe x16	N/A	
	PCIe x4	N/A	
	PCIe x1	N/A	
	PCI	N/A	
	Mini-PCIe	2 (one with SIM holder)	
<b>Storage</b>	SATA	1	
	mSATA	1	
	CFast	N/A	
	CompactFlash	N/A	
<b>Front I/O</b>	RJ-45	N/A	
	Audio	N/A	
	USB	4 x USB 2.0	
	Serial	4 x COM ports COM1: RS-232/422/485; COM2~4: RS-232	
	Parallel	N/A	
	PS/2	N/A	
	HDMI	N/A	
	DVI	N/A	
	VGA	N/A	
	Antenna	N/A	
	<b>Rear I/O</b>	RJ-45	2
		Audio	1 x Line-out
		USB	2 x USB 2.0
Serial		N/A	
Parallel		N/A	
PS/2		N/A	
HDMI		1	
DVI		N/A	
VGA		1	
Antenna		2 holes reserved for antennas	
<b>Power Source</b>	Power Adaptor	DC-in 12V/36W	
	Power Supply	N/A	
<b>Environment</b>	Operating Temperature	0 ~ 40°C	
	Operating Humidity	10 ~ 90%, non-condensing	
	Storage Temperature	-20 ~ 80°C	
	Storage Humidity	10 ~ 90%, non-condensing	
<b>Physical Characteristics</b>	Dimensions	196mm x 136mm x 43mm	
	Weight	1.20 kg	
	Installation	Wall mounting	
<b>Certification</b>	EMC	FCC, CE, C-Tick, VCCI, BSMI	
	Safety	N/A	
<b>Software Platform</b>	Operating System Support	Windows 7 (32-bit), Windows XP (32-bit)	