

# ARK-3380

## Multiple Video Interface, Compact System



### Features


- DVI, LVDS, and TV-out display interfaces with dual display capability
- Built-in Intel® Ultra Low Voltage Celeron® or Low Voltage Intel Pentium® M processor
- Sealed construction with fanless operation
- Anti-vibration to ensure maximum reliability
- Easy integration, easy maintenance, few parts and wide range of power sources
- Embedded software support




### Specifications

Processor System	CPU	Intel Ultra Low Voltage Celeron or Intel Pentium M Low Voltage Processor ULV Celeron M 1.0 GHz (0 KB L2 Cache) LV Pentium M 1.4 GHz (1 MB L2 Cache)
	System Chipset	Intel 852GM GMCH or Intel 855GME Chipset Intel ICH4 Chipset, 400 MHz FSB
	BIOS	4-Mbit Flash BIOS, supports Plug & Play, APM 1.2
	System Memory	1 x 200-pin SODIMM socket Supports DDR SDRAM up to 1GB
Graphics	Chipset	Integrated graphics built in to Intel 852GM GMCH, or Intel 855GME GMCH, utilizing Intel Extreme Graphics 2 technology
	Display Memory	Dynamic video memory allocation up to 64 MB
	Display Interface	CRT Interface 36-bit LVDS interface DVI interface, compliant with DVI specification 1.0
Ethernet	Ethernet Controller	Intel 82551QM 10/100Base-T Ethernet controller
Audio	Amplifier	Dual output 6 W Amplifier
	Interface	Speaker-out, Mic-in, Line-in
Others	Serial Interface	1 x RS-232 port and 1 x RS-232/422/485 port
	USB Interface	3 x USB port, USB 2.0 Compliant
	Watchdog Timer	255-level timer interval, setup by software
	Keyboard/Mouse	Supports PS/2 Mouse and PS/2 Keyboard
Software Options	DIO	Support D type, 8bit DIO
Storage	HDD	Windows XP Embedded, Windows 2000/XP Windows 32 bit Vista
	SSD	Supports a drive bay space for 2.5" SATA HDD Supports a CompactFlash socket for Type I/II CompactFlash disk
Mechanical	Construction	Aluminum housing
	Mounting	DIN-rail mounting Desk/wall-mounting
	Dimensions (W x H x D)	264.5 x 69.2 x 137.25 mm (10.41" x 2.72" x 5.4")
	Weight	2 kg/4.4 lb
Power	Power Consumption	Typical: 24 W, Max 36 W
	Input Voltage	12 Vdc ~ 24 Vdc, 12 Vdc @ 3 A, 24 Vdc @ 1.5 A
Environment	Operating Temperature	With Industrial Grade CompactFlash disk only: -20 ~ 60° C With 2.5-inch hard disk: 0 ~ 45° C
	Relative Humidity	95 % @ 40° C (non-condensing)
	Vibration Loading	With CompactFlash disk: 5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 Oct./min, 1 hr/axis
	During Operation	With 2.5-inch hard disk: 1 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 Oct./min, 1 hr/axis
	Shock During Operation	With CompactFlash disk only: 50 G , IEC 60068-2-27, half sine, 11 ms duration
	With hard disk: 20 G, IEC 60068-2-27, half sine, 11 ms duration	
EMC	CE/FCC Class A, CCC, BSMI	
Safety Certification	CE, UL, CCC, BSMI	

## Front Metal Panel I/O Mechanical Drawing/Layout

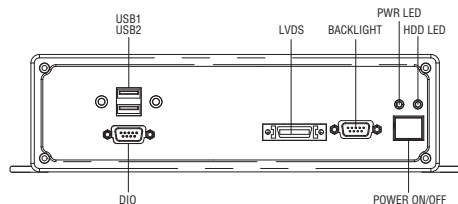

## Rear Metal Panel I/O Mechanical Drawing/Layout

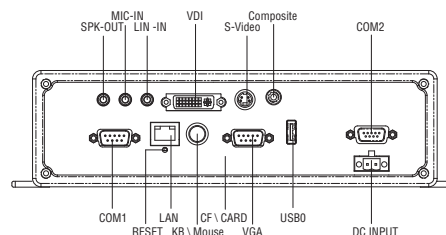

## Packing List

Part Number	Description
-	1 x ARK-3380 Unit
197001110	1 x DIN-Rail Mounting Kit
197001120	
197001130	
197001140	
1700060202	1 x PS2 Keyboard/Mouse Cable
2066338400	1 x Utility CD
1700001967	1 x Flat cable for RS-485/422 mode of COM2
1700001394	1 x 2-pin Phoenix to DC-Jack power cable

## Ordering Information

Part Number	Description
ARK-3380-1S0B1E	ULV Celeron M 1.0 GHz Embedded Box Computer, with DVI, LVDS, Audio, Fast Ethernet, S-Video, C-Video, 1 x RS-232 port, 1 x RS-232/422/485 port 3 x USB2.0, 1 x 8 bits DIO
ARK-3380-1S4B1E	LV Pentium M 1.4 GHz, Embedded Box Computer, with DVI, LVDS, Audio, Fast Ethernet, S-Video, C-Video, 1 x RS-232 port, 1 x RS-232/422/485 port 3 x USB2.0, 1 x 8 bits DIO

## Optional Items

### External AC-to-DC Adapter and Power Cable

Part Number	Description
1757000222	AC-to-DC Adapter DC19 V/3.42 A 65 W, with Phoenix Power Plug, 0 ~ 40° C for Home and Office Use
1700001947	Power cable 2P 180 cm, USA for ARK-338X
1700001948	Power cable 2P 180 cm, Europe for ARK-338X
1700001949	Power cable 2P 180 cm, UK for ARK-338X

### Embedded OS (Only available for T-Parts OEM, and CTOS service)

Part Number	Description
96SW-VISTABS-US1	Microsoft VISTA Business DSP ENGLISH
2070001112	XPE with Feature Pack 2007 OS Image and License for ARK-3380/1/2/3/4/9 English Version (600 MB)
2070001113	XPE with Feature Pack 2007 OS Image and License for ARK-3380/1/2/3/4/9 Traditional Chinese Version (600 MB)