FWA-3010

Rackmount Internet Security Platform with 3 Ethernet Ports



Features


- · Internet security platform for enterprise
- · Compact Ultra-slim 1U rackmount housing
- Intel® Pentium® III processor up to 866 MHz
- · Max. 2 GB SDRAM
- One IDE HDD drive space and DOM option
- · Triple Fast Ethernet for WAN, LAN and DMZ

Introduction

The FWA-3010 is a 1U rackmount Firewall/VPN platform suitable for enterprise users. The platform can provide one Disk-on-Module (DOM) to store OS and AP. In addition, an optional IDE HDD allows users to store event logs in the local site. The design also includes 3 front access network ports (Fast Ethernet ports for WAN, LAN and DMZ), and one


RS-232 console port, which is designed to set the parameters of application software, local management, maintenance and diagnostics. There are eight LED indicators that show the status of power, HDD and 3 LANs. With a ServerWorks chipset server board, this 1U appliance can satisfy the demands for today's enterprise firewall security needs.





IDE HDD drive (optional) allows users to store event logs

(€ (№ FCC

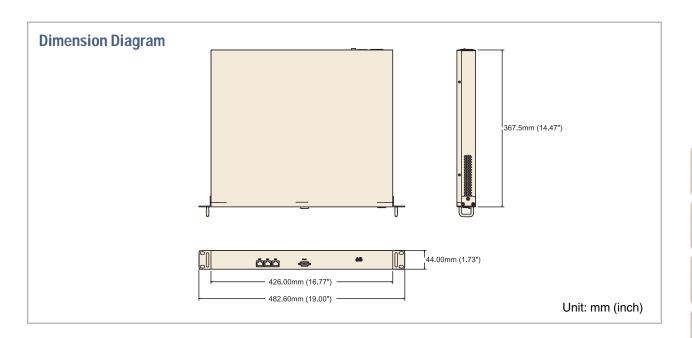

Specifications

opecinications					
Processor System	CPU	Intel® Pentium® III	Intel® Celeron®		
	Max. Speed	866 MHz	1.2 GHz		
	L2 Cache	256 KB			
	Chipset	ServerWorks ServerSet 30LE			
	BIOS	Award 2 Mb Flash			
Memory	Technology	PC-133 registered SDRAM with ECC	support		
	Max. Capacity	2 GB			
	Socket	168-pin DIMM x2			
Ethernet	Interface	10/100Base-TX			
	Controller	Intel 82559 x3			
	Connector	RJ-45 x3			
Drive Bay	3.5" HDD	1			
Cooling	Fan	3 (10 CFM/each)			
Operating System	Compatibility	Windows 2000/NT 4.0, Red Hat Linux 6.2/7.x, FreeBSD 4.x			
Management	Console	RS-232 x1			
Miscellaneous	Control	Power switch			
Power Supply	Watt	200 W ATX			
	Input	AC 90 ~ 264 V @ 47 ~ 63 Hz, full rai	nge		
Environment		Operating	Non-Operating		
	Temperature	0 ~ 40 °C (32 ~ 104 °F)	-20 ~ 75 °C (-4 ~ 167 °F)		
	Humidity	5 ~ 85 % @ 40 °C (104 °F)	5 ~ 95 %		
Physical	Dimensions (W x H x D)	482 x 44 x 367 mm (19" x 1.7" x 14	.4")		
	Weight	4.5 Kg (9.9 lb)			

Ordering Information

Part Number	Processor	Power Supply	SDRAM	HDD Drive	DOM Flash
FWA-3010		200 W			

CompactPCI

CompactPCI 2

CompactPCI Peripherals

Stade

Hetwork Appliances 5

> Server stems

itorage subsystems

dustrial imputer iassis

ull-sized PU Cards

Industrial Computer Peripherals