






ISO 9001
KEMA
ACCREDITED BY
THE DUTCH COUNCIL
FOR ACCREDITATION



The Versatile 15" TFT LCD Color Monitor

MODEL NO.	HI-15W12C	HI-15Y12C
Viewing area	15"	
Touch Panel	NO	YES(ELO)
Pixel Pitch	0.297 X 0.297 mm	
Resolution	1024 X 768 XGA	
Effective display area	304.1 X 228.1mm	
Color	16,777,216	
Response time(tr/tf)	6 /19ms	
Contrast ratio	500:1	
Brightness	320 cd/m ²	
View angle	T:50° B:60° L:65° R:65°	
Backlight	4CCFL	
Lamp Life	50000hrs	
Input Signal	Analog VGA & Video	
Input Connector	D-Sub 15Pin, RCA Jack, S-VHS Din Type	
Scan frequency	H:31.5~68.7KHz / V:56~85Hz	
Control	OSD	
Power adaptor input	Universal AC 100~240 V, 50/60Hz	
Adaptor output	DC 12V	
Power Management	VESA DPMS Standard	
Consumption	35W / Stand by 2.5 w	
Operating Temperature/Humidity	0 ~ 40°C / 10 ~ 85%RH	
Storage Temperature/Humidity	-20 ~ 60°C / 10 ~ 90%RH	
Sync Signal	TTL Level +/- Polarity	
Scanning	Non-Interlace	
Dimension (mm)(WxHxD)	379.4 x 285.4 x 53	379.4 x 285.4 x 57
Net Weight(Kg)	3.9	5
Safety & EMI	CE	
Vibration	10Hz / One-way 1m/m	
Pixel (MHz)	94.5 MHz	
Content	LCD Monitor, Key Pad, Power Adaptor, VGA Cable	

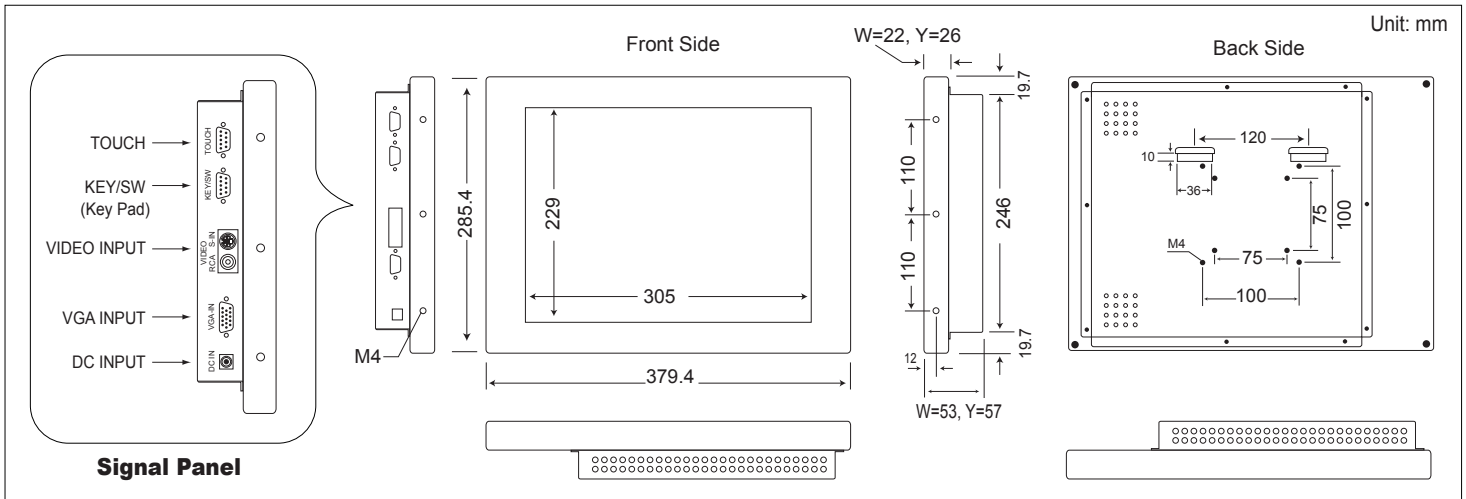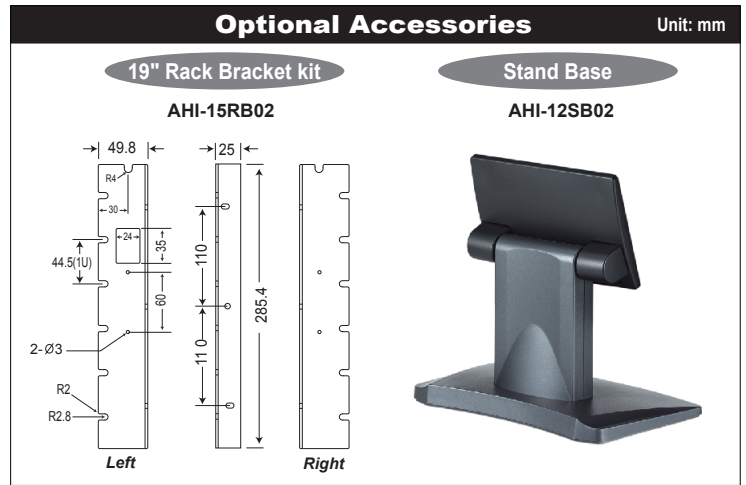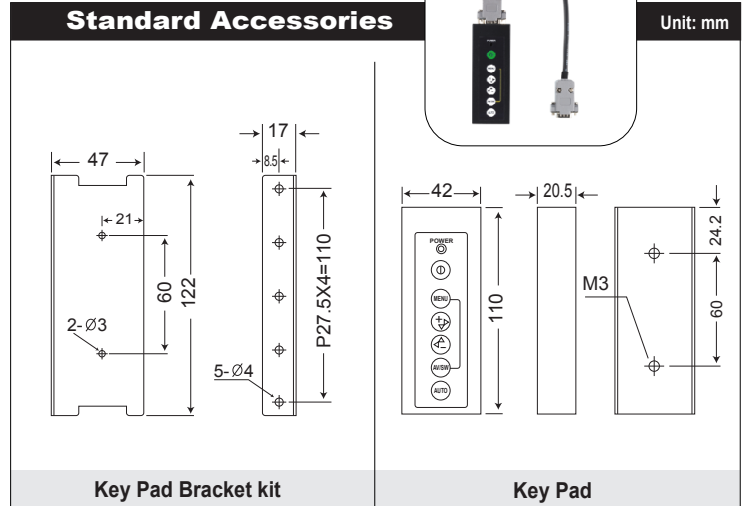

Specification subject to change without notice.