

HPC-7242

2U Rackmount Chassis for ATX Motherboard with 4 SAS/SATA HDD Trays



Features

- Supports ATX motherboard
- Supports 4 hot-swap trays for 2.5" or 3.5" SAS/SATA HDDs
- Supports two internal HDD and one slim ODD
- Front-accessible system fan without opening top cover for easy maintenance
- LED indicators and audible alarm notification for system fault detection
- Lockable front door prevents unauthorized access
- Supports either single or redundant power supply

Quiet


CE FCC 

Specifications

Drive Bay	Slim Optical Drive	Front-accessible	Internal
	2.5" or 3.5"	1	-
Cooling	Fan	4 SAS/SATA HDDs	2 (2.5")
	Air Filter	1 (8 cm/47CFM) + 2 (6 cm/28CFM) for SAS/SATA storage unit	
Front I/O Interface	USB	Yes	
Miscellaneous	LED Indicators	2	
	Rear Panel	Power, HDD, temperature, fan, LAN1, and LAN2	
Environment		Operating	Non-Operating
	Temperature	0 ~ 40° C (32 ~ 104° F)	-20 ~ 60° C (-4 ~ 140° F)
	Humidity	10 ~ 85% @ 40° C, non-condensing	10 ~ 95% @ 40° C, non-condensing
	Vibration (5 ~ 500 Hz)	1 Grms	2 G
	Shock	10 G (with 11 ms duration, half sine wave)	30 G
Physical Characteristics	Dimensions (W x H x D)	482 x 88 x 525 mm (19" x 3.46" x 20.67")	
	Weight	13.7 kg (30.12 lb)	

Dimensions

Unit: mm [inch]

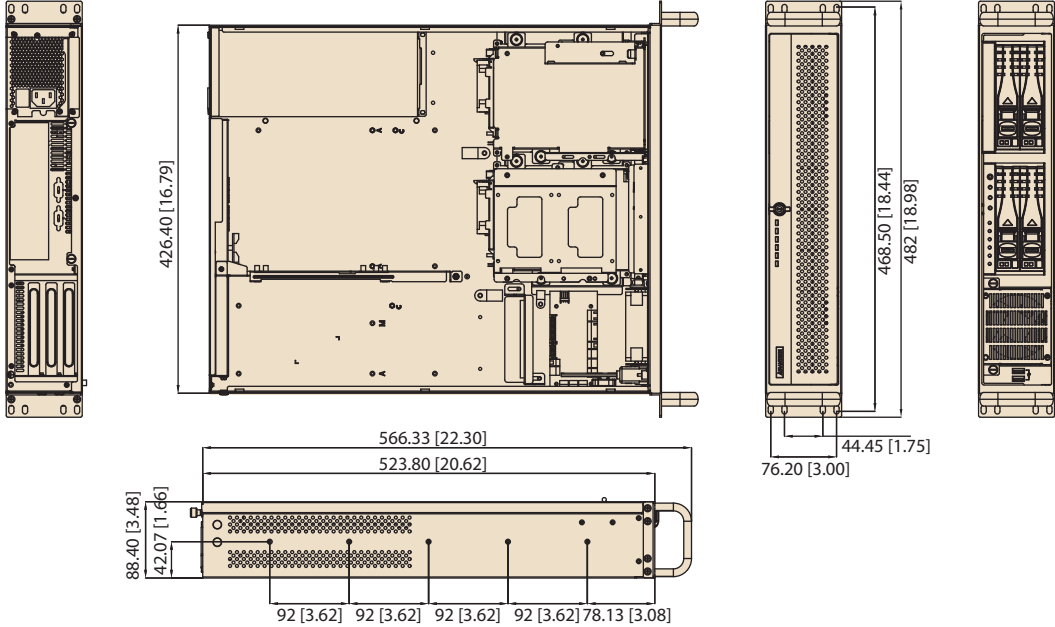

Ordering Information

Part Number	Power Supply
HPC-7242MB-00XE	Without power supply, with ATX switch