

IPC-7143

Desktop/Wallmount Chassis for ATX Motherboard with 2 SATA HDD Trays & Bottom-accessible I/O



Features

- Supports one slim CD-ROM drive, two removable 3.5" SATA HDDs and two standard 3.5" drives
- Bi-directional wall-mount options with bottom accessible I/O interfaces
- Easy-to-replace 85-CFM cooling fan with air filter
- Front-accessible USB and PS/2 interfaces
- Visible LED indicators and audible alarm notification for system fault detection
- Removable and shock-resistant drive housings
- Lockable front door prevents unauthorized access
- Optional dual redundant power supply



Specifications

Drive Bay	5.25"	Front-accessible	1 (Slim CD-ROM drive)
	3.5"		4 (2 standard + 2 removable SATA HDD trays)
Cooling	Fan	One 12 x 12 cm (up to 3.8 cm depth) 85 CFM; one 5 x 5 cm 47 CFM blower	
	Air Filter	One 120 x 120 mm	
I/O Interface	USB	2 (front-accessible)	
	PS/2	PS/2 keyboard and mouse, or PS/2 keyboard depends on the enclosed motherboard	
Miscellaneous	Indicators	PWR, HDD, Temperature and Fan	
	Switches	Power, system reset and alarm reset	
	Bottom Panel	Reserved two D-Sub 9-pin openings	
	Hold-down clamp	Hold-down clamp with attached rubber cushions	
Environment	Temperature	Operating	Non-Operating
		0 ~ 40° C (32 ~ 104° F)	-20 ~ 60° C (-4 ~ 140° F)
	Humidity	10 ~ 85 % @ 40° C, non-condensing	
		10 ~ 95 % @ 40° C, non-condensing	
	Vibration (5 ~ 500 Hz)	1 Grms	
		2 G	
Physical Characteristics	Shock	10 G (With 11 ms duration, half sine wave)	
		30 G	
Physical Characteristics	Altitude	0 to 3,048 m (0 ~ 10,000 ft)	
	Dimensions (W x H x D)	320 x 450 x 200 mm (12.6" x 17.7" x 7.9")	
	Weight	14 kg (30.8 lb)	



Plug ring-lock securely fastens the power cord (PS-400ATX-ZB)



Easy-to-maintain cooling fan & filter



One slim CD-ROM drive, two 3.5" disk drives & two removable SATA HDD trays



Bottom view of IPC-7143




Power supply bracket with hinges



Bidirectional wall-mountable design

Dimensions

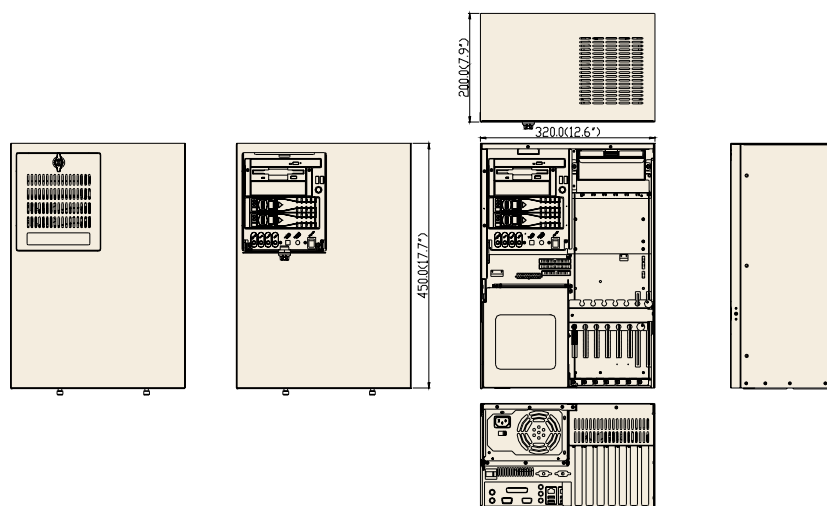

Unit: mm (inch)

Power Supply Options

Part Number	Watt	Input	Output	Specifications		
				Mini-load	Safety	MTBF
PS-300ATX-ZBE (ATX, PFC)	300 W	AC 100 ~ 240 V (full-range)	+5 V @ 30 A, +12 V @ 15 A, +3.3 V @ 28 A, -5 V @ 0.3 A, -12 V @ 0.8 A, +5 Vsb @ 2 A	+5 V @ 0.1 A, +3.3 V @ 0.3 A	UL/TUV/CB/CCC	100,000 hrs @ 25° C
RPS-300ATX-ZE (ATX, PFC)	300 W	AC 100 ~ 240 V (full-range)	+5 V @ 25 A, +12 V @ 16 A, +3.3 V @ 18 A, -5 V @ 0.5 A, -12 V @ 0.5 A, +5 Vsb @ 2 A	+5 V @ 3 A, +3.3 V @ 1 A, +12 V @ 2 A, +5 Vsb @ 0.1 A	UL/TUV/CB/CCC	100,000 hrs @ 25° C
PS-400ATX-ZBE (ATX, PFC)	400 W	AC 100 ~ 240 V (full-range)	+5 V @ 35 A, +12 V @ 30 A, +3.3 V @ 25 A, -5 V @ 0.8 A, -12 V @ 1 A, +5 Vsb @ 2 A	+5V @ 3 A, +3.3 V @ 1 A, +12 V @ 1 A, +5 Vsb @ 0.1 A	UL/TUV/CB/CCC	91,000 hrs @ 25° C
RPS-400ATX-ZE (ATX, PFC)	400 W	AC 100 ~ 240 V (full-range)	+5 V @ 35 A, +12 V @ 28 A, +3.3 V @ 25 A, -5 V @ 0.5 A, -12 V @ 1.2 A, +5 Vsb @ 2 A	+5 V @ 3 A, +3.3 V @ 1 A, +12 V @ 2 A, +5 Vsb @ 0.1 A	UL/TUV/CB/CCC	100,000 hrs @ 25° C
PS-300ATX-DC48E	300 W	DC -48 V	+5 V @ 30 A, +12 V @ 15 A, +3.3 V @ 28 A, -5 V @ 0.3 A, -12 V @ 0.8 A, +5 Vsb @ 2 A	+5 V @ 0.3 A, +3.3 V @ 0.3 A, +12 V @ 0.2 A	UL/TUV/CB/CCC	100,000 hrs @ 25° C

Accessories

Part Number	Description
SCD-ROME	Black slim 24X CD-ROM drive with 40-pin IDE connector
SDVD-CDRWE	Black slim 8X DVD + 24X CD-RW with 40-pin IDE connector
96FDD-144-TE-B1	Black 3.5" FDD
1750000257	2U-high P4 Socket 478 CPU cooler up to 3.2 GHz (89 W)
1700060202	Y-cable for PS/2 mouse & keyboard
1990000486	Fan filter 133 x 112 x 5 mm

Ordering Information

Part Number	Power Supply	Motherboard	Regulation
IPC-7143-00XE	Without power supply, with ATX switch	-	-