IPPC-6152A

15" XGA TFT LCD Core™2 Quad / Core™2 Duo Industrial Panel PC with 2 x PCI Slots



Features

- 15" XGA TFT LCD with touchscreen
- Intel® Core ™2 Quad CPU (up to 2.8 GHz) / Core ™2 Duo CPU (up to 3.0 GHz)
- System memory supports dual channel DDR3 SDRAM up to 4GB
- Offers two expansion slots for PCI add-on cards
- Dual Gigabit Ethernet with Intel vPro technology
- Supports 2 x 2.5" SATA HDDs and RAID 0/1 compatibility
- Front USB access and system reset function
- Flat-sealed front panel
- Control box with gull-wing design for easy installation and maintenance
- Front panel is NEMA4/IP65 compliant





Introduction

The IPPC-6152A is an Industrial Panel PC with front USB access, supports the powerful Intel Core 2 Quad/Core 2 Duo, high speed DDR3 memory, two expansion PCI slots and slim type DVD-RW. The processor and chipset combination form the foundation of vPro, Intel's next generation digital office platform, offering remote out-of-band manageability, improved security, and energy efficient performance. Two SATA hard drive interfaces with RAID 0,1 support provides data security. The flat-sealed front panel design also allows easier cleaning and liquid run off. Also the control box has a gull-wing design for easy component installation and maintenance.

Specifications

General

BIOS AMI 4 MB Flash BIOSCertifications UL, CE, FCC, CCC, BSMI

Enclosure Die-cast flat-sealed front with SGCC Housing
 Dimension (W x H x D) 449.92 x 315.63 x 142.7 mm (17.71" x 12.43" x 5.62")

Mounting Panel, Rack (option)
 OS Support Windows 7, Windows XP

■ **Power Input** 100 ~ 240 V_{AC} @ 60 ~ 50 Hz, 7 ~ 3.5 A

Power Supply 350 WWeight (Gross) 13 Kg (18.6 lbs)

System Hardware

• CPU Supports Socket LGA775 based up to Intel Core 2

Quad 2.8 GHz/Core 2 Duo 3.0 GHz
Chipset Intel Q45 GMCH/ICH10D0

Memory
 Two DDR3 240pin slots up to 4GB 1066/1333 MHz

SDRAM

LAN
 10/100/1000 Base-T Ethernet x 2
 Expansion
 2 x half-length PCI Slots

• **Storage** Supports 2 x 2.5" SATA HDD Interface and Intel Matrix

Storage Technology RAID 0/1
1 x Slim Type DVD-RW

■ **Optical Driver** 1 x Slim Type DVD-RW ■ **I/Os** 2 x RS-232, 1 x RS-232/422/485

5 x USB 2.0 (one at front) 2 x PS2 (Keyboard, Mouse)

1 x VGA Port

Mic-in, Line-in, Line-out

LCD Display

Backlight Life 50,000 hrs
 Contrast Ratio 500:1
 Display Size 15"

Display Type XGA TFT LCD
 Luminance 250 cd/m²

Max. Colors
16.2M (RGB 6-bit + FRC data)

Max. Resolution 1024 x 768
 Viewing Angle (H/V°) 140/120

Touchscreen

• **Lifespan** 36 million with a silicone rubber of R8 finger, writing

rate is by 250g at 2 times/s

■ Light Transmission > 80%

• **Type** Analog resistive 5-wire

Environment


• **Humidity** $5 \sim 85\%$ @ 40 °C (non-condensing)

Ingress Protection Front panel: NEMA4/IP65
 Operating Temperature 0 ~ 50° C (32 ~ 122° F)
 Storage Temperature -20 ~ 60° C (-4 ~ 140° F)

• **Vibration Protection** 5 ~ 500 Hz, 1 Grms random vibration

Ordering Information

• IPPC-6152A-R1AE 15" Core 2 Quad/Core 2 Duo Industrial Panel PC

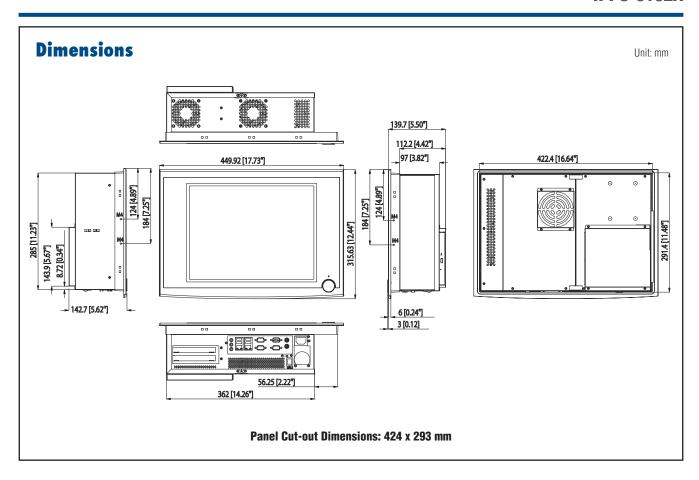

Accessories

■ IPPC-6152A-RMKE IPPC-6152A/IPPC-6152F Rack Mount Kit

1702002600 Power Cable US Plug 1.8 M **1702002605** Power Cable EU Plug 1.8 M **1702031801** Power Cable UK Plug 1.8 M

1702031836 Power Cable China/Australia Plug 1.8 M

Front Accessible USB Port



I/O View

