

# LCM-2X16

## LCD Message Display Module with RS-232 Interface




### Features

- 2 lines, 16 characters per line LCD message display with back light
- Size fits into a 5.25" device bay, can carry a 3.5" HDD
- Plastic bezel with 5 keys (up, down, enter, escape and alarm off; user programmable)
- RS-232 interface with easy-to-use predefined protocol
- 8 user-defined icons

### Specifications

LCD Module	2 lines 16 characters per line Programmable backlight
Interface	RS-232
Power Requirement	5 V @ 100 mA
Operating/Storage Temperature	0 ~ 50° C (32 ~ 122° F)
Dimensions (W x H x D)	148 x 42 x 158 mm (5.83" x 1.65" x 6.22")

### Dimension Diagram

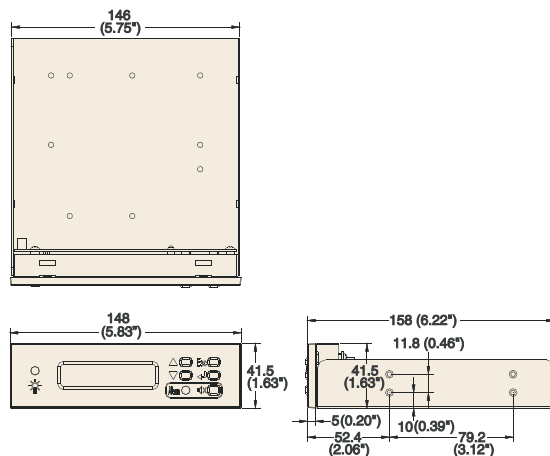

Unit: mm (inch)

### Ordering Information

Part Number	Descriptions
LCM-2X16-00A1	LCD message display module with RS-232 interface

### Packing List

Part Number	Description	Quantity
1703090902	RS-232 cable connects to Advantech's CPU card COM2 port with 4-pin power connector	X 1
-	Startup manual	X 1
1703090903	RS-232 cable with DB-9 & 4-pin power connector (Optional, ordered separately)	X 1