


PCA-6179

Socket 370 Pentium® III Processor Card with VGA/LAN/ SCSI/HISA (133 MHz FSB)

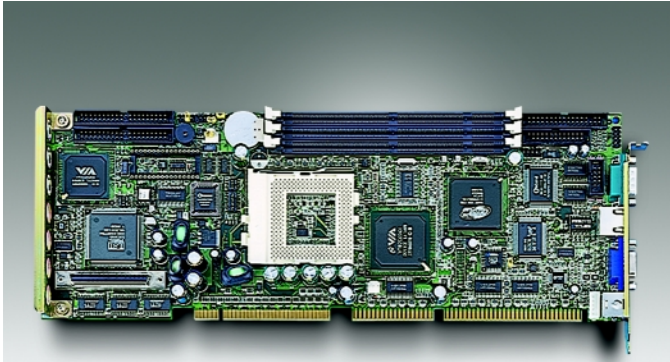

Features

- Socket 370 Pentium III up to 1 GHz
- VIA Apollo Pro 133A 100/133 MHz FSB
- Onboard high performance AGP 4X VGA with 8/32 MB SDRAM
- Supports 10/100Base-T Ethernet, RTL8139C controller
- Onboard Symbios SYM53C895 Ultra2 SCSI up to 80 MB/sec
- CMOS automatic backup and restore to prevent accidental data loss of BIOS setup

Specifications

Processor System	CPU	Intel® Pentium III	
	Max. Speed	1 GHz	
	L2 Cache	256 KB	
	Chipset	VIA Apollo Pro133A	
	BIOS	Award 2 Mb Flash	
Bus	Front Side Bus	100/133 MHz	
	PCI	32-bit/33 MHz	
	SCSI	HISA (ISA high drive)	
Memory	Technology	PC-133/100 SDRAM with ECC support	
	Max. Capacity	1.5 GB	
	Socket	168-pin DIMM x3	
Graphic	Controller	ATI RAGE Pro 128 4XL (AGP 4X)	
	VRAM	8/32 MB	
Ethernet	Interface	10/100Base-T	
	Controller	RTL8139C	
	Connector	RJ-45	
SCSI	Interface	Ultra2 wide	
	Controller	Symbios SYM53C895	
	Max. Data Transfer Rate	80 MB/sec.	
EIDE	Channel	1	
	Mode	ATA 66/33	
I/O Interface	Channel	2 (Max. 4 devices)	
	USB	Max. 2 (USB 1.1 compliant)	
	Serial	2 (RS-232)	
	Parallel	1 (SPP/EPP/ECP)	
	FDD	1	
	PS/2	1 (for mouse and keyboard, Y cable included)	
Watchdog Timer	Output	Interrupt, system reset	
	Interval	Programmable, 1 ~ 63 sec.	
Miscellaneous	Solid State Disk	M-system's DOC 2000 (144 MB)	
	Typical	Pentium III 600EB, 128 MB	
Power Requirement	+5 V	+12 V	-12 V
	4.8 A	400 mA	20 mA
	Operating	Non-Operating	
Environment	Temperature	0 ~ 60 °C (32 ~ 140 °F)	-20 ~ 70 °C (-4 ~ 158 °F)
	Physical	Dimensions	338 x 122 mm (13.3" x 4.8")

Ordering Information

Part Number	HISA	VGA (AGP)	SCSI	LAN
PCA-6179L-00A1	v	--	--	--
PCA-6179V-00A1	v	v (8 MB)	--	--
PCA-6179VE-00A1	v	v (8 MB)	--	v
PCA-6179VS-00A1	v	v (8 MB)	v	--
PCA-6179F-00A1	v	v (8 MB)	v	v
PCA-6179V-02A1	v	v (32 MB)	--	--
PCA-6179VE-02A1	v	v (32 MB)	--	v
PCA-6179F-02A1	v	v (32 MB)	v	v

Packing List

CPU fan		X 1	1759207200
FDD cable		X 1	1700340640
IDE HDD cable		X 2	1701400452
Printer + COM cable		X 1	1701260305
ATX-to-PS/2 power cable		X 1	1700000450
Y cable for PS/2 mouse & keyboard		X 1	1700060202
Jumper pack		X 1	9689000068
Startup manual		X 1	--
Utility CD		X 1	--

Accessory Options

USB cable with 2 ports	1700100170
SCSI cable (125 cm) with terminator	1701060000

CompactPCI Enclosures 1

CompactPCI Boards 2

CompactPCI Peripherals 3

Blade Servers 4

Network Appliances 5

e-Server Systems 6

Storage Subsystems 7

Industrial Computer Chassis 8

Full-sized CPU Cards 9

Industrial Computer Peripherals 10



CE FCC

For More Information



www.advantech.com/nc

Enter

ADVANTECH

• All brand names and registered trademarks are the property of their respective owner
• All specifications are subject to change without notice

Date of Publication: 2003-01-20