


# PCM-3110A

## 1-slot PCMCIA Module

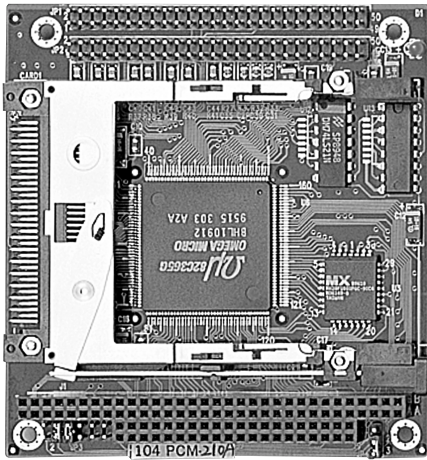

FCC CE

### Features:

- Supports type I, II, III PCMCIA cards
- 16-bit data bus
- Busy status LED

### Specifications

|                                 |   |
|---------------------------------|---|
| • <b>Standard</b>               | Complies with PCMCIA V2.10 and JEIDA 4.1  |
| • <b>PC Card Format</b>         | Accepts Type I/II/III PCMCIA cards  |
| • <b>Data Bus</b>               | 16-bit  |
| • <b>Secondary PCMCIA Drive</b> | Supports (PC/104 or external drive)<br>Card drive with PC/104 bus<br>1 main PCMCIA slot<br>extended to 2nd slot<br>with extended (TEAC) FDD<br>extended to 3.5" FDD bay |
| • <b>BIOS</b>                   | Programmable 32 KB SMD boot Flash BIOS  |
| • <b>Power Consumption</b>      | +5 V @ 70 mA (typical)  |
| • <b>Power requirements</b>     | +5 V, ±5 % tolerance on power supply  |
| • <b>Size/Weight</b>            | 96 mm x 90 mm (3.8" x 3.5"), 0.092 kg (0.203 lb)  |
| • <b>Temperature</b>            | Operating: 0 ~ 60° C (32 ~ 140° F)<br>Storage: -40 ~ 85° C (-40 ~ 185° F)   |
| • <b>Operating Humidity</b>     | 0% ~ 90% Relative Humidity, non-condensing  |

### Packing List


- Manual
- CD-ROM (Manual, Driver, Utility)

### Ordering Information

- PCM-3110A-00A3 PCMCIA Module with DOS, Win3.1, Win95 utility
- PCM-3110A-03A3 PCMCIA Module utility disk for Win NT

# PCM-3112

## 2-Slot PCMCIA Module

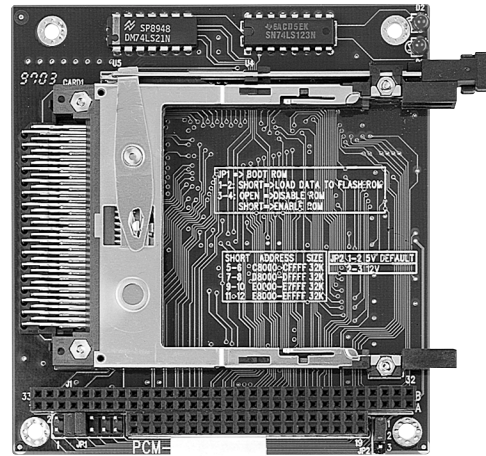

FCC CE

### Features:

- 2 PCMCIA slots
- Bootable from linear Flash card or ATA Flash, ATA HDD
- 16-bit data bus
- Busy status LED

### Specifications

|                                 |   |
|---------------------------------|---|
| • <b>Standard</b>               | Complies with PCMCIA V2.10 and JEIDA 4.1 spec.                            |
| • <b>PC Card Format</b>         | Accepts Type I/II/III PCMCIA cards  |
| • <b>Data Bus</b>               | 16-bit  |
| • <b>Secondary PCMCIA Drive</b> | Features 2 PCMCIA drives  |
| • <b>BIOS</b>                   | Programmable 32 KB SMD-type boot EEPROM BIOS                              |
| • <b>Power Consumption</b>      | +5 V @ 70 mA (typical)  |
| • <b>Power requirements</b>     | +5 V, ±5 % tolerance on power supply                                      |
| • <b>Size/Weight</b>            | 96 mm x 90 mm (3.8" x 3.5"), 0.1 kg (0.22 lb)                             |
| • <b>Temperature</b>            | Operating: 0 ~ 60° C (32 ~ 140° F)<br>Storage: -40 ~ 85° C (-40 ~ 185° F) |
| • <b>Operating Humidity</b>     | 0% ~ 90% Relative Humidity, non-condensing                                |

### Packing List

- Manual
- CD-ROM (Manual, Driver, Utility)

### Ordering Information

- PCM-3112-0000 2-slot PCMCIA module with DOS, Win3.1, Win95 utility