

# **POS-7551**

Geode™ FlexATX SBC for POS  
Applications

User's Manual for POS-7551

## Copyright notice

This document is copyrighted, 2001. All rights are reserved. The original manufacturer reserves the right to make improvements to the products described in this manual at any time without notice.

No part of this manual may be reproduced, copied, translated or transmitted in any form or by any means without the prior written permission of the original manufacturer. Information provided in this manual is intended to be accurate and reliable. However, the original manufacturer assumes no responsibility for its use, nor for any infringements upon the rights of third parties which may result from its use.

## Acknowledgements

VIA is a trademark of Silicon Integration Systems Corp.

AMD is a trademark of Advanced Micro Devices, Inc.

Award is a trademark of Award Software International, Inc.

Cyrix is a trademark of Cyrix Corporation.

IBM, PC/AT, PS/2 and VGA are trademarks of International Business Machines Corporation.

Intel and Pentium are trademarks of Intel Corporation.

Microsoft Windows® is a registered trademark of Microsoft Corp.

SMC is a trademark of Standard Microsystems Corporation.

C&T is a trademark of Chips and Technologies, Inc.

UMC is a trademark of United Microelectronics Corporation.

RTL is a trademark of Realtek Semi-Conductor Co., Ltd.

All other product names or trademarks are properties of their respective owners.

Part No. 2006755100

1st Edition Published in Taiwan April 2001

## Packing List

---

Before installing your board, insure that the following materials have been received:

- 1 POS-7551 all-in-one single board computer
- 1 CD-ROM or disks for utility, drivers, and manual (in PDF format)
- 1 warranty certificate
- 1 FDD cable
- 1 UDMA/33 IDE flat cable
- 1 startup manual

If any of these items are missing or damaged, contact your distributor or sales representative immediately.

# Table of Contents

<b>Chapter 1 General Information</b> .....	<b>1</b>
1.1 Introduction .....	2
1.2 Features .....	3
1.3 Specifications .....	4
Standard SBC functions .....	4
Ethernet Interface .....	5
Audio Function (POS-7551F only) .....	5
Digital I/O .....	5
Mechanical and Environmental .....	5
1.4 Board dimensions .....	6
<b>Chapter 2 Installation</b> .....	<b>7</b>
2.1 Jumpers .....	8
2.2 Connectors .....	8
2.3 Locating Jumpers and Connectors .....	10
2.4 Safety Precautions .....	13
2.5 Setting jumpers .....	14
2.6 Flat panel display connector (CN15) .....	18
2.7 Digital I/O (CN5: 2 Outputs, 2 Inputs) .....	19
2.8 CompactFlash™ I/II connector (CN27) .....	20
2.9 USB connector (CN21) .....	20
2.10 Audio interfaces (CN19, CN24, CN20) .....	21
2.11 40-pin Primary IDE (3.5" HDD) Connector (CN10) .....	22
2.12 FDD connector (CN9) .....	23
2.13 44-pin Secondary Mini-pitched IDE Interface (2.5" HDD or SSD) (CN8) .....	24
2.14 VGA interface connections .....	24
2.15 Power connectors (CN14) .....	25
2.16 IR connector (CN7) .....	25
2.17 Serial ports (COM1 - 4) (CN18/25, CN17, CN16, CN13) .....	25
2.18 Keyboard/mouse connectors (CN23) .....	26
2.19 LPT1 (primary parallel port) connector (CN22) .....	26

<b>2.20 LPT2 (secondary parallel port) connector (CN14)</b>	<b>26</b>
<b>2.21 Ethernet configuration</b>	<b>27</b>
<b>2.22 Watchdog Programming Sample</b>	<b>27</b>

## **Chapter 3 Software Configuration ..... 29**

<b>3.1 Introduction</b>	<b>30</b>
<b>3.2 Utility CD disk</b>	<b>30</b>
<b>3.3 BIOS Program Setup</b>	<b>31</b>
<b>3.4 Connections for two standard LCDs</b>	<b>32</b>
<b>3.5 Ethernet interface configuration</b>	<b>34</b>
<b>4.1 System test and initialization</b>	<b>36</b>
<b>4.2 Award BIOS setup</b>	<b>37</b>
4.2.1 Entering setup	37
4.2.2 Standard CMOS setup	38
4.2.3 BIOS features setup	39
4.2.4 Chipset features setup	40
4.2.5 Power management setup	41
4.2.6 PnP/PCI configuration setup	42
4.2.7 Integrated peripherals	43
4.2.8 Load BIOS defaults	43
4.2.9 Change password	44
4.2.10 Auto detect hard disk	45
4.2.11 Save & exit setup	45
4.2.12 Exit without saving	45
4.2.8 Load BIOS defaults	46

## **Chapter 5 VGA and Audio Setup ..... 47**

<b>5.1 Introduction</b>	<b>48</b>
5.1.1 Chipset (NS CX5530A) (POS-7551)	48
5.1.2 Display memory	48
<b>5.2 Installation of CX5530A chipset VGA and Audio driver ...</b>	<b>49</b>
5.2.1 Installation for Windows 3.1 (VGA only)	50
5.2.2 Installation for Windows 95/98 VGA and Audio	53
5.3 Installation for Windows NT Audio (CX5530A)	57
5.4 Installation for Windows NT VGA for CX5530A	61

## **Chapter 6 PCI Bus Ethernet Interface ..... 65**

<b>6.1 Introduction .....</b>	<b>66</b>
<b>6.2 Installation of Ethernet driver .....</b>	<b>66</b>
6.2.1 Installation for MS-DOS and Windows .....	66
6.2.1 Installation for Windows 95/98 .....	67
6.2.2 Installation for Windows NT .....	72

## **Appendix A Pin Assignments ..... 75**

<b>A.1 LCD brightness adjust connector (CN1) .....</b>	<b>76</b>
<b>A.2 LCD contrast adjust connector (CN2) .....</b>	<b>76</b>
<b>A.3 System function connector (CN3) .....</b>	<b>77</b>
<b>A.5 Digital I/O (CN5) .....</b>	<b>78</b>
<b>A.4 ATX power connector (CN4) .....</b>	<b>78</b>
<b>A.6 LCD backlight connector (CN6) .....</b>	<b>79</b>
<b>A.7 IR connector (CN7) .....</b>	<b>79</b>
<b>A.8 Secondary slave IDE connector (CN8) .....</b>	<b>80</b>
<b>A.9 FDD connector (CN9) .....</b>	<b>81</b>
<b>A.10 Primary IDE connector (CN10) .....</b>	<b>82</b>
<b>A.13 COM4 connector (CN13) .....</b>	<b>83</b>
<b>A.14 LPT2 connector (CN14) .....</b>	<b>83</b>
<b>A.15 LCD 18 bit connector For Cyrix chipsets (CN15) .....</b>	<b>84</b>
<b>A.16 COM3 connector (CN16) .....</b>	<b>85</b>
<b>A.17 COM2 connector (CN17) .....</b>	<b>85</b>
<b>A.19 Audio connector (CN19) .....</b>	<b>86</b>
<b>A.18 COM1 connector (CN18) .....</b>	<b>86</b>
<b>A.20 CD audio-in connector (CN20) .....</b>	<b>87</b>
<b>A.22 LPT1 connector (CN22) .....</b>	<b>87</b>
<b>A.23.1 PS/2 mouse connector (CN23) .....</b>	<b>88</b>
<b>A.23.2 Keyboard connector (CN23) .....</b>	<b>88</b>
<b>A.26 CRT connector (CN26) .....</b>	<b>89</b>
<b>A.25 COM1 connector (CN25) .....</b>	<b>89</b>

# Figures

<i>Figure 1-1: Board dimensions (component side)</i> .....	6
<i>Figure 2-1: Locating jumpers</i> .....	10
<i>Figure 2-2: Locating connectors</i> .....	11
<i>Figure 2-3: Backside connectors</i> .....	12
<i>Figure 3-1: Contents of the POS-7551 Series utility disk</i> .....	30
<i>Figure 3-2: BIOS program setup screen</i> .....	31
<i>Figure 4-1: Setup program initial screen</i> .....	37
<i>Figure 4-2: CMOS setup screen</i> .....	38
<i>Figure 4-3: BIOS features setup screen</i> .....	39
<i>Figure 4-4: Chipset features setup screen</i> .....	40
<i>Figure 4-5: Power management setup screen</i> .....	41
<i>Figure 4-6: PCI configuration setup screen</i> .....	42
<i>Figure 4-7: Integrated peripherals setup screen</i> .....	43

# Tables

Table 2-1: Connectors .....	8
Table 2-2: Connectors .....	8
Table 2-3: Digital output programming .....	19
Table A-1: LCD brightness adjust Connector (CN1) .....	76
Table A-2: LCD contrast adjust Connector (CN2) .....	76
Table A-3: System function connector (CN3) .....	77
Table A-5: Digital I/O (CN2) .....	78
Table A-4: ATX power connector (CN4) .....	78
Table A-6: LCD backlight Connector (CN6) .....	79
Table A-7: IR Connector (CN7) .....	79
Table A-8: Secondary slave Connector (CN8) .....	80
Table A-9: FDD connector (CN0) .....	81
Table A-10: Primary IDE Connector (CN10) .....	82
Table A-13: COM4 connector (CN13) .....	83
Table A-14: LPT2 connector (CN14) .....	83
Table A-16: COM3 connector (CN16) .....	85
Table A-17: COM2 connector (CN17) .....	85
Table A-19: Audio connector (CN19) .....	86
Table A-18: COM1 connector (CN18) .....	86
Table A-20: CD audio-in connector (CN20) .....	87
Table A-22: LPT1 connector (CN22) .....	87
Table A-23.1: PS/2 Mouse Connector (CN23) .....	88
Table A-23.2: Keyboard Connector (CN23) .....	88
Table A-26: CRT connector (CN26) .....	89
Table A-25: COM1 connector (CN25) .....	89

## General Information

This chapter gives background information on the POS-7551.

Sections include:

- Introduction
- Features
- Specifications
- Board layout and dimensions

## 1.1 Introduction

---

The POS-7551 is a low cost, fanless Geode GX1-233 FlexATX board especially designed for POS applications. The POS-7551 is made with industrial grade construction that can better withstand constant 24 hour a day use, high vibration, shock, exposure to humidity, moisture and heat. The GX1-233 processor allows for fanless operation that virtually eliminates heat buildup problems that has traditionally been the number one cause of failure in enclosed POS systems.

The POS-7551 has one PCI slot, one ISA expansion slot, two digital I/Os and four on-board serial ports each with +5 V/+12 V power. These flexible I/Os have standard OLE interfacing that allow for application hardware independence to be realized. Peripherals ranging from bar code scanners, card readers, printers, cash drawers etc., are all easily supported. The POS-7551 uses a standardized layout based on FlexATX form factor. It is 100% PC compatible and ready for any existing PC software or hardware.

Other on-board industrial features not found on conventional motherboards include a watchdog timer for dependability during unmanned operations, and CMOS backup to Flash ROM. The optional Compact-Flash™ card can also be use to support memory modules.

## 1.2 Features

---

- NS Geode™ GX1-233 processor on board
- Fanless operation
- VGA/LCD controller with Universal Memory Architecture
- Supports 18 bit TFT display
- 10/100 Mbps PCI ethernet interface with wake-on-LAN support
- 4 COM ports with power line support in Pin 9
- Digital I/O (2 in & 2 out)
- 2 parallel ports
- 2x USB
- 4 Mbps FIR
- Socket for CompactFlash™ card (POS-7551F only)
- Watchdog timer: Software enabled/disabled 1 ~255 minutes selectable.
- AC97 audio interface (POS-7551F only)
- 16 MB onboard DRAM (POS-7551F only)

## 1.3 Specifications

---

### Standard SBC functions

- CPU: Embedded low power NS Geode GX1-233
- BIOS: 2 Mbit Flash BIOS, supports Plug & Play, APM 1.2, Supports Ethernet boot ROM, boot from CD-ROM and boot from LS-120 ZIP Drive, optional customer icon available.
- Chipset: CX 5530A
- System memory: One DIMM socket accepts 8 ~ 128 MB SDRAM (8/16/32/64/128 MB)  
16 MB onboard DRAM (POS-7551F only)
- Enhanced IDE interface: Supports up to four EIDE devices. BIOS auto-detect, PIO Mode 3 or Mode 4 transfer, Ultra DMA33 mode (ATA-4) up to 33 MB/sec
- FDD interface: Supports 360K/1.2M/720K/1.44MB/2.88MB up to two FDDs
- Serial ports: Four serial RS-232 ports, COM1,2, 3, 4, all provide power support
- Parallel port: Two parallel ports, supports EPP/ECP mode
- Infrared port: Shared with COM4. Transfer rates up to 4 Mbps
- Keyboard/mouse connector: Supports standard PS/2 keyboard and a PS/2 mouse
- Power management: Supports power saving modes including Normal/Standby modes. APM 1.1 compliant
- Watchdog timer: 1 ~ 255 minutes selectable
- USB: Two universal serial bus ports: Compliant with USB Spec. Rev. 1.10

## **Ethernet Interface**

- Chipset: RTL 8139C
- Ethernet interface: PCI 10/100 Mbps Ethernet. IEEE 802.3 U protocol compatible
- Connection: On-board RJ-45 connector
- I/O address switchless setting
- Built-in boot ROM

## **Audio Function (POS-7551F only)**

- Audio controller: AC97 version 2.0 compliant interface
- Audio interface: Microphone in, line in, CD audio in, line out, speaker L and Speaker R

## **Digital I/O**

- Two digital inputs and outputs

## **Mechanical and Environmental**

- Dimensions (L x W): 229 x 191 mm (9.0" x 7.5")
- Power supply voltage: +5 V  $\pm$ 5 %
- Power requirements: typical 5 V@2.62 A (w/ GX1-233 MHz CPU & 128 MB RAM)
- Operating temperature: 0 ~ 60° C (32 ~ 140° F)
- Weight: 0.5 kg (1.1 lb)

# 1.4 Board dimensions

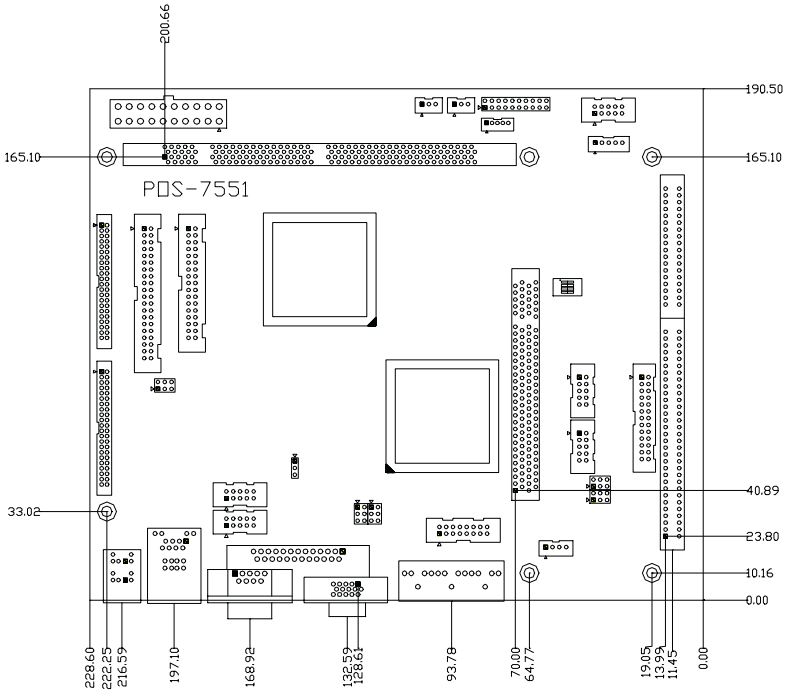


Figure 1-1: Board dimensions (component side)

## Installation

This chapter explains how to set up the POS-7551 hardware, including instructions on setting jumpers and connecting peripherals, switches and indicators. Be sure to read all the safety precautions before you begin the installation procedure.

## 2.1 Jumpers

---

The POS-7551 has a number of jumpers that allow you to configure your system to suit your application. The table below lists the function of each of the board's jumpers.

---

Table 2-1: Connectors

---

<b>Label</b>	<b>Function</b>
J1 CN15 LCD Voltage select	
J2 Clear RTC	
J3 COM3, COM4 Voltage select	
J4 COM3, COM4 Ring/Voltage select	
J5 COM1, COM2 Ring/Voltage select	
J6 COM1, COM2 Voltage select	
SW1	Share IRQ select

---

## 2.2 Connectors

---

On-board connectors link the POS-7551 to external devices such as hard disk drives, a keyboard, or floppy drives. The tables below lists the function of each of the board's connectors.

---

Table 2-2: Connectors

---

<b>Label</b>	<b>Function</b>
CN1	LCD Brightness adjustor connector
CN2	LCD Contrast adjustor connector
CN3	System Function connector
CN4	ATX Power connector
CN5	Digital I/O connector

---

CN6	LCD Backlight connector
CN7	IR connector
CN8	Secondary Slaver IDE connector
CN9	FDD connector
CN10	Primary IDE connector
CN11	ISA Slot
CN12	PCI Slot
CN13	COM4 connector
CN14	LPT2 connector
CN15	LCD 24Bit connector: Color bits for 18-bit TFT LCD
CN16	COM3 connector
CN17	COM2 connector
CN18	COM1 connector
CN19	Audio connector
CN20	CDROM Audio-In connector
CN21	LAN, USB1, USB2 connectors
CN22	LPT1 connector
CN23	PS/2 Keyboard, mouse connector
CN24	Line in, Microphone in & speaker out
CN25	COM1 connector
CN26	CRT connector
CN27	CompactFlash™ socket

## 2.3 Locating Jumpers and Connectors

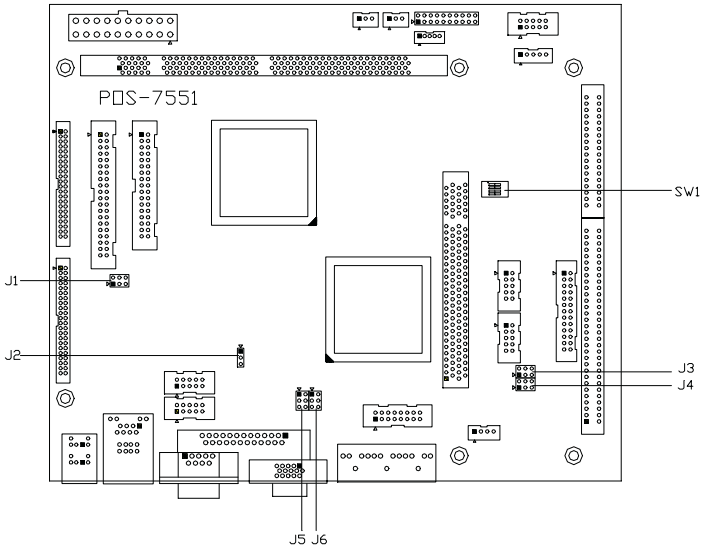


Figure 2-1: Locating jumpers

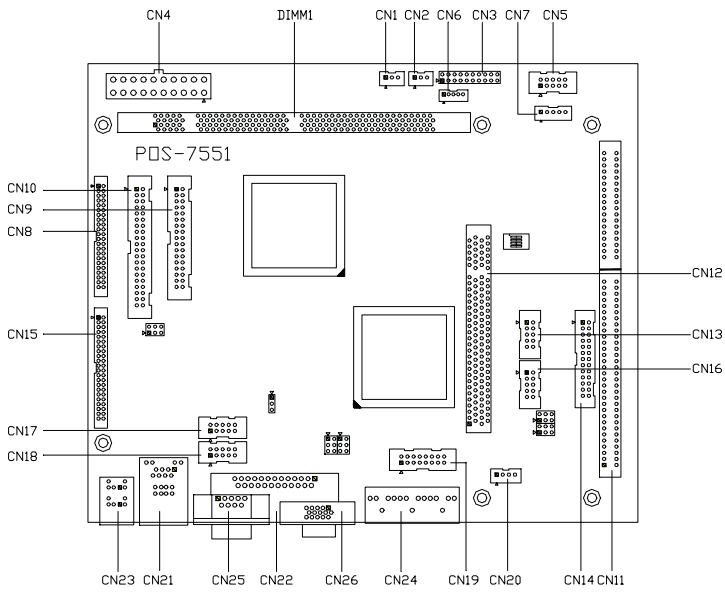


Figure 2-2: Locating connectors

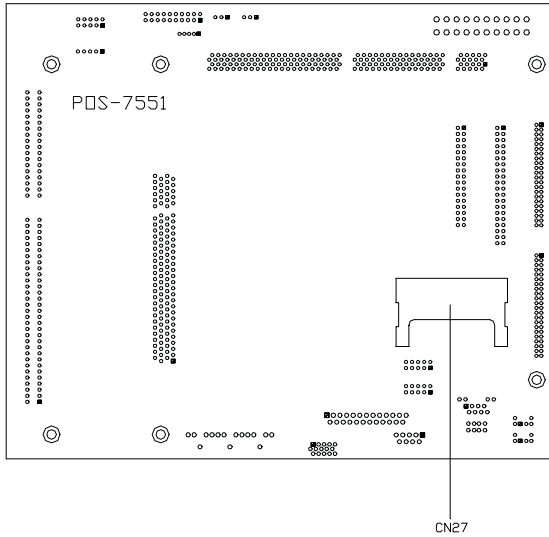


Figure 2-3: Backside connectors

## 2.4 Safety Precautions

---

The following sections tell how to make each connection. In most cases, you will simply need to connect a standard cable.

**Warning!** *Always completely disconnect the power cord from your chassis whenever you are working on it. Do not make connections while the power is on. Sensitive electronic components can be damaged by a sudden rush of power. Only experienced electronics personnel should open the PC chassis.*




**Caution!** *Always ground yourself to remove any static charge before touching the CPU card. Modern electronic devices are very sensitive to static electric charges. Use a grounding wrist strap at all times. Place all electronic components on a static-dissipative surface or in a static-shielded bag when they are not in the chassis.*



# 2.5 Setting jumpers

## 2.5.1 Introduction

You may configure your card to match the needs of your application by setting jumpers. A jumper is the simplest kind of electrical switch. It consists of two metal pins and a small metal clip (often protected by a plastic cover) that slides over the pins to connect them. To "close" a jumper, you connect the pins with the clip. To "open" a jumper you remove the clip. Sometimes a jumper will have three pins, labeled 1, 2, and 3. In this case you would connect either pins 1 and 2 or 2 and 3.

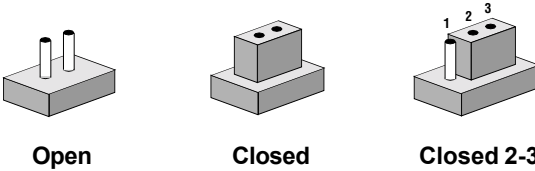

The jumper settings are schematically depicted in this manual as follows:



A pair of needle-nose pliers may be helpful when working with jumpers.



If you have any doubts about the best hardware configuration for your application, contact your local distributor or sales representative before you make any changes.

Generally, you simply need a standard cable to make most connections.

## 2.5.2 Settings details



### J1: CN15 LCD voltage select

Closed pins	Result
1-3, 2-4	+5 V*
3-5, 4-6	+3.3 V



### J2: Clear RTC





Closed pins	Result
1-2	Clear RTC
2-3	RTC*



### J3: COM3, COM4 Voltage select


Closed pins	COM 3
2-4	COM3 +5 V*
4-6	COM3 +12 V

Closed pins	COM 4
1-3	COM4 +5 V*
3-5	COM4 +12 V




**J4: COM3, COM4 Ring/Voltage select**


<b>Closed pins</b>	<b>COM 3</b>
2-4	Voltage
4-6	Ring*
<b>Closed pins</b>	<b>COM 4</b>
1-3	Voltage
3-5	Ring*




Voltage



Ring\*




Voltage




Ring\*

**J5: COM1, COM2 Ring/Voltage select**


<b>Closed pins</b>	<b>COM 1</b>
2-4	Voltage
4-6	Ring*
<b>Closed pins</b>	<b>COM 2</b>
1-3	Voltage
3-5	Ring*




Voltage



Ring\*



Voltage



Ring\*

\*Default settings

---

J6: COM1, COM2 Voltage select


---

Closed pins	COM 1
2-4	+5V*
4-6	+12V

---

Closed pins	COM 2
1-3	+5V*
3-5	+12V

---

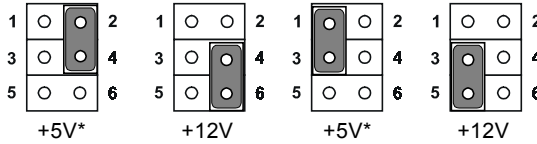



---

SW1: Share IRQ select

---

ON	Result
1,2,3	IRQ4:COM1, IRQ3:COM2, IRQ10:COM3, IRQ5:COM4
2,3	IRQ10: COM1, COM2, COM3, COM4
1,3	IRQ5: COM1, COM2, COM3, COM4
3	IRQ3: COM1, COM2, COM3, COM4
1,2	IRQ4: COM1, COM2, COM3, COM4
2	IRQ4: COM1, COM3; IRQ3: COM2, COM4
1	IRQ4: COM1; IRQ3: COM2; IRQ10: COM3, COM4
None	IRQ4: COM1; IRQ3: COM2, COM3, COM4

---



## 2.6 Flat panel display connector (CN15)

---

CN1 consists of a 44-pin, dual-in-line header.

The power supply (+12 V) for CN1 is dependant on the supply connected to the board. Therefore make sure that CN4 is connected to a +12 V power supply.

The POS-7551 provides a bias control signal on CN1 which can be used to control the LCD bias voltage. It is recommended that the LCD bias voltage not be applied to the panel until the logic supply voltage (+5 V or +3.3 V) and panel video signals are stable. Under normal operation the control signal (ENAVEE) is active high. When the POS-7551 board's power is applied, the control signal is low until just after the relevant flat panel signals are present.

## 2.7 Digital I/O (CN5: 2 Outputs, 2 Inputs)

The POS-7551 has two TTL level digital outputs address 550h, and two TTL level digital inputs (address 551h). You can configure the digital I/O to control the opening of the cash drawer and to sense the closing of the cash drawer. The following explains how the digital I/O is controlled via software programming.

Digital I/O Connector			
+5V	1	2	+5 V
+12V	3	4	+12V
D/I/O OUT 0	5	6	D/I/O OUT 1
D I/O In 0	7	8	D/I/O IN 1
GND	9	10	GND

### 2.7.1 Digital output programming

Output is TTL type.

Table 2-3: Digital output programming

Output	Address	Bit
Out 1	550	1
Out 2	550	2

Example: ("0" = off "1" = on)

Data 00 = Out 0 and Out 1 = "0"

Data 02 = Out 0 = "1"

Data 04 = Out 1 = "1"

Data 06 = Out 0 and Out 1 = "1"

## **2.8 CompactFlash™ I/II connector (CN27)**

---

The POS-7551 Series is equipped with a CompactFlash disk socket that supports an IDE interface CompactFlash disk card. The socket itself is especially designed to prevent any incorrect installation of the CompactFlash disk card. When installing or removing the CompactFlash disk card, please make sure that the system power is off.

The CompactFlash disk card is defaulted as the Secondary IDE Master HDD in your PC system.

## **2.9 USB connector (CN21)**

---

The POS-7551 board provides two USB (Universal Serial Bus) interfaces which support plug and play and hot attach/detach for up to 127 external devices. The USB interfaces comply with USB specification Rev. 1.0 and are fuse protected.

The USB interfaces can be disabled in the system BIOS setup.

## **2.10 Audio interfaces (CN19, CN24, CN20)**

---

The POS-7551 is equipped with a high quality audio interface, which provides 16-bit CD-quality recording and playback as well as OPL3 compatible FM music. It is supported by all major operating systems and is 100% Sound Blaster Pro compatible.

### **2.10.1 Audio connector (CN19, CN24)**

The POS-7551 provides all major audio signals on a 16-pin flat-cable connector, CN19. These audio signals include Microphone in (mono), Line in (stereo), Line out (stereo), and Speaker out (stereo). You will need an adapter cable if you use traditional telephone jack connectors for these audio signals. The other CN24 connectors include line out, line in and microphone in accordance with PC98 standard.

### **2.10.2 CD audio-in connector (CN20)**

All CD-ROM drives can provide analog audio signal output when used as a music CD player. The CN20 on POS-7551 is a connector to input CD audio signal into the audio controller. The audio cable of your CD-ROM drive will be used to connect to CN20.

## 2.11 40-pin Primary IDE (3.5" HDD) Connector (CN10)

---

The 40-pin IDE connector (CN10) supports up to two 40-pin IDE interface devices, including CD-ROM drives, tape-backup drives, HDDs, etc. When connecting, make sure pin 1 of the connector is matched with pin 1 of the device's connector.

The built-in Enhanced IDE (Integrated Device Electronics) controller supports up to two IDE channels, including CD-ROM drives, tape backup drives, a large hard disk drive and other IDE devices. It also supports faster data transfer rates and allows IDE hard disk drives with capacities in excess of 528 MB.

### Connecting the hard drive

Connecting drives is done in a daisy-chain fashion. Wire number 1 on the cable is red or blue, while the other wires are gray.

Unlike floppy drives, IDE hard drives can connect to either end of the cable. If you install two drives, you will need to set one as the master and one as the slave by using jumpers on the drives. If you install just one drive, set it as the master.

## 2.12 FDD connector (CN9)

---

You can attach up to two floppy disks to the POS-7551's on-board controller. You can use any combination of 5¼" (360 KB and 1.2 MB) and/or 3½" (720 KB, 1.44 MB, and 2.88 MB) drives.

A 34-pin daisy-chain drive connector cable is required for a dual-drive system. On one end of the cable is a 34-pin flat-cable connector. On the other end are two sets of floppy disk drive connectors. Each set consists of a 34-pin flat-cable connector (usually used for 3½" drives) and a printed-circuit board connector (usually used for 5¼" drives).

### 2.12.1 Connecting the floppy drive

1. Plug the 34-pin flat-cable connector into CN9. Make sure that the red wire corresponds to pin one on the connector.
2. Attach the appropriate connector on the other end of the cable to the floppy drive(s). You can use only one connector in the set. The set on the end (after the twist in the cable) connects to the A: drive. The set in the middle connects to the B: drive.
3. If you are connecting a 5¼" floppy drive, line up the slot in the printed circuit board with the blocked-off part of the cable connector.

If you are connecting a 3½" floppy drive, you may have trouble determining which pin is pin number one. Look for a number printed on the circuit board indicating pin number one. Also, the connector on the floppy drive connector may have a slot. When the slot is up, pin number one should be on the right. Check the documentation that came with the drive for more information.

The B: drive can be attached to the connectors in the middle of the cable as described above.

## **2.13 44-pin Secondary Mini-pitched IDE Interface (2.5" HDD or SSD) (CN8)**

---

The on-board 44-pin mini-pitched IDE interface allows users to support either a 2.5" HDD or a Sandisk IDE Flash module (P/N: PCD-1230-2M/4M) that is available in both 2 and 4 MB versions.

Follow the same connection arrangement as the 3.5" HDD if you want to connect to a 2.5" IDE device. Read the BIOS setup section for more information regarding system settings.

## **2.14 VGA interface connections**

---

The POS-7551's VGA interface can drive conventional CRT displays and is capable of driving a wide range of flat panel displays, including electroluminescent (EL), gas plasma, passive LCD and active LCD displays. The board has two connectors to support these displays, one for standard CRT VGA monitors and one for flat panel displays.

### **2.14.1 CRT display connector (CN26)**

CN26 is a standard 15-pin D-SUB connector commonly used for the CRT VGA monitor only. Pin assignments appear in the appendix.

### **2.14.2 Flat panel display connector (CN15)**

CN14 consists of a 44-pin, dual inline header. It can connect to a 24-bit TFT LCD panel. Pin assignments appear in the appendix.

### **2.14.3 LCD power setting (J1)**

The POS-7551's VGA interface supports 5 V and 3.3 V LCD displays. By changing the setting of J1, you can select the panel video power level to be 5 V or 3.3 V.

## 2.15 Power connectors (CN14)

---

### 2.15.1 ATX power input connector (CN14)

The power connection is a 20-pin connector requiring  $\pm 5$  V and  $\pm 12$  V and 5VSB single.

## 2.16 IR connector (CN7)

---

The POS-7551 provides an IrDA port. This connector supports the optional wireless infrared transmitting and receiving module, which is mounted on the system case. Configuration of the module is done through BIOS setup.

## 2.17 Serial ports (COM1 - 4) (CN18/25, CN17, CN16, CN13)

---

The POS-7551 has a total of four on-board RS-232 serial ports, COM1-4. All four serial ports have +5 V and +12 V power capabilities on pin #9, (CN25) pin # 8 (CN18/17/16/13) depending on the jumper setting. Pin assignments for both internal and external COM ports can be found in the appendix.

### 2.17.1 Primary serial ports (COM1: CN18/25, COM2: CN17)

COM 1 has two connections, one external DB-9 and one internal 10-pin header giving the user the flexibility to adapt the board to many different systems. IRQ for COM1 and COM2 is default with COM1 on IRQ4 and COM2 on IRQ3. COM1 and COM2 can be enabled or disabled via BIOS (see Chapter 4).

### 2.17.2 Secondary serial ports (COM3: CN16, COM4: CN13)

The secondary serial ports each have one 10-pin, internally positioned header connection. The IRQ for COM3 is fixed at IRQ10 and COM4 is fixed at IRQ5. COM3 and COM4 can be enabled/disabled via BIOS (see Chapter 4).

## **2.18 Keyboard/mouse connectors (CN23)**

---

The POS-7551 is uniquely designed to keyboard and mouse input.

## **2.19 LPT1 (primary parallel port) connector (CN22)**

---

The primary parallel printer port is located at the rear edge of the board, and has a DB-25 connector. This printer port is typically used to connect a printer via an adapter cable. LPT1's IRQ setting is defined as IRQ7. You can select Normal/EPP/ECP for LPT1, and enable/disable it in BIOS (see Chapter 4).

## **2.20 LPT2 (secondary parallel port) connector (CN14)**

---

This secondary port has a 26-pin box header. LPT2's IRQ setting is defined as IRQ9. You can select Printer/EPP/ECP/SPP for LPT2, and enable/disable it in BIOS (see Chapter 4).

## 2.21 Ethernet configuration

---

The POS-7551 is equipped with a high performance 32-bit PCI-bus Ethernet interface which is fully compliant with IEEE 802.3 u 10/100Mbps CSMA/CD standards. It is supported by all major network operating systems.

The medium type can be configured via the RSET8139.EXE program included on the utility disk (see Chapter 3 for detailed information).

### 2.21.1 RJ-45 connector (CN21)

100/10Base-T connects to the POS-7551 via an RJ-45 standard jack.

### 2.21.2 Network boot

The Network Boot feature can be utilized by incorporating the Boot ROM image files for the appropriate network operating system. You can enable or disable it in BIOS.

## 2.22 Watchdog Programming Sample

---

Debug Program	Result
-o 370 87 -o 370 87	OPEN 2nd SUPER I/O
-o 370 2c -o 371 15	Set Pin119 to GP16, Pin 104 to GP15, Pin 103 to GP14
-o 370 07 -o 371 07	Set device 07
-o 370 e6 -o 371 0a	Set GP16 to WDT
-o 370 07 -o 371 08	Set device 08
-o 370 f2 -o 371 01	00 : disable,01 : time out after 1 min,02 : time out after 1 min....FF : time out after 255 min



# CHAPTER 3

## Software Configuration

This chapter details the software configuration information. It shows you how to configure the card to match your application requirements. Award system BIOS is covered in Chapter 4.

Sections include:

- Connections for two standard LCDs

## 3.1 Introduction

---

The POS-7551 system BIOS and custom drivers are located in a 256 KB, 32-pin Flash ROM device, designated U21. A single Flash chip holds the system BIOS and VGA BIOS.

## 3.2 Utility CD disk

---

The POS-7551 is supplied with a software utility on CD-ROM. This disk contains the necessary file for setting up the VGA display. Directories and files on the disk are as follows:



**Figure 3-1: Contents of the POS-7551 Series utility disk**

### **AWDFLASH.EXE**

This program allows you to update the BIOS Flash ROM.

### **PxxxBIN**

This binary file contains the system BIOS.

### **CBROM.EXE**

This program allows you to combine your own VGA BIOS with system BIOS.

### **RSET8139.EXE**


This program enables you to view the current Ethernet configuration, reconfigure the Ethernet interface (medium type, etc.), and execute useful diagnostic functions.

### 3.3 BIOS Program Setup

---

*Note: Make sure that you do not run AWDFLASH.EXE while your system is operating in EMM386 mode.*

1. At the prompt, type AWDFLASH.EXE and press <Enter>. The VGA configuration program will then display the following:

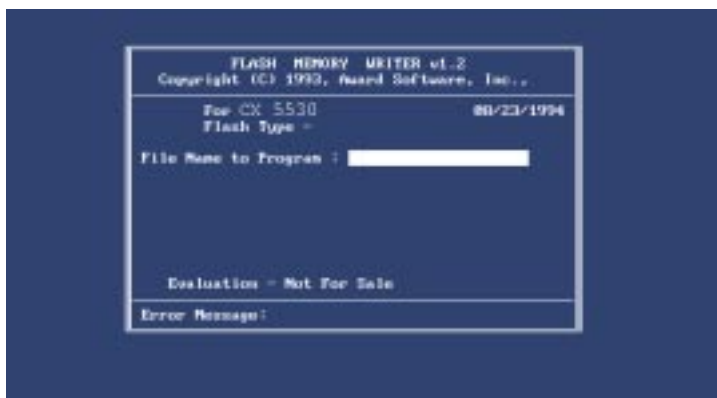

**Figure 3-2: BIOS program setup screen**

2. At the prompt, type in the BIN file which supports your display. When you are sure that you have entered the file name correctly press <Enter>. The screen will ask “Do you want to save?” If you wish to continue press Y. If you change your mind or have made a mistake press N.
3. If you decide to continue, the screen will issue a prompt which will then ask “Are you sure to program (Y/N)?” If you wish to continue, press Y. Press N to exit the program.

The new VGA configuration will then write to the ROM BIOS chip. This configuration will remain the same until you run the AWDFLASH.EXE program and change the settings.

## 3.4 Connections for two standard LCDs

### 3.4.1 Connections for Toshiba LTM10C042 (640 x 480 TFT color LCD)

Table 3-1: Connections for Toshiba LTM10C042

<b>LTM10C042</b>		<b>POS-7551 CN15</b>	
<b>Pin</b>	<b>Name</b>	<b>Pin</b>	<b>Name</b>
1	GND	3	GND
2	CLK	35	SHFCLK
3	GND	4	GND
4	R0	27	PD12
5	R1	28	PD13
6	R2	29	PD14
7	GND	8	GND
8	R3	30	PD15
9	R4	31	PD16
10	R5	32	PD17
11	GND	33	GND
12	G0	19	PD6
13	G1	20	PD7
14	G2	21	PD8
15	GND	33	GND
16	G3	22	PD9
17	G4	23	PD10
18	G5	24	PD11
19	GND	34	GND
20	ENAB	37	M
21	GND	34	GND
22	B0	11	PD0
23	B1	12	PD1
24	B2	13	PD2
25	GND	39	GND
26	B3	14	PD3
27	B4	15	PD4
28	B5	16	PD5
29	GND	39	GND
30	VDD	5	+5 V
31	VDD	6	+5 V

### 3.4.2 Connections for Toshiba LTM12C275A (800 x 600 TFT color LCD)

Table 3-2: Connections for Toshiba LTM12C275A

<b>LTM12C275A</b>		<b>POS-7551 CN15</b>	
<b>Pin</b>	<b>Name</b>	<b>Pin</b>	<b>Name</b>
1	GND	3	GND
2	NCLK	35	SHFCLK
3	NC	-	NC
4	NC	-	NC
5	GND	4	GND
6	R0	27	PD12
7	R1	28	PD13
8	R2	29	PD14
9	R3	30	PD15
10	R4	31	PD16
11	R5	32	PD17
12	GND	8	GND
13	G0	19	PD6
14	G1	20	PD7
15	G2	21	PD8
16	G3	22	PD9
17	G4	23	PD10
18	G5	24	PD11
19	GND	33	GND
20	B0	11	PD0
21	B1	12	PD1
22	B2	13	PD2
23	B3	14	PD3
24	B4	15	PD4
25	B5	16	PD5
26	ENAB	37	M/DE
27	GND	34	GND
28	VCC	5	+5 V
29	VCC	6	+5 V
30	GND	39	GND

## 3.5 Ethernet interface configuration

---

The POS-7551's on-board Ethernet interface supports all major network operating systems. To configure the medium type, to view the current configuration, or to run diagnostics, do the following:

1. Power the POS-7551 on. Make sure that the RSET8139.EXE file is located in the working drive.
2. At the prompt, type RSET8139.EXE and press <Enter>. The Ethernet configuration program will then be displayed.
3. This simple screen shows all the available options for the Ethernet interface. Just highlight the option you wish to change by using the Up and Down keys. To change a selected item, press <Enter>, and a screen will appear with the available options. Highlight your option and press <Enter>. Each highlighted option has a helpful message guide displayed at the bottom of the screen for additional information.
4. After you have made your selections and are sure this is the configuration you want, press ESC. A prompt will appear asking if you want to save the configuration. Press Y if you want to save.

The Ethernet Setup Menu also offers three very useful diagnostic functions. These are:

1. Run EEPROM test
2. Run Diagnostics on Board
3. Run Diagnostics on Network

Each option has its own display screen that shows the format and result of any diagnostic tests undertaken.

# CHAPTER 4

## Award BIOS Setup

This chapter describes how to set BIOS configuration data.

## 4.1 System test and initialization

---

These routines test and initialize board hardware. If the routines encounter an error during the tests, you will either hear a few short beeps or see an error message on the screen. There are two kinds of errors: fatal and non-fatal. The system can usually continue the boot up sequence with non-fatal errors. Non-fatal error messages usually appear on the screen along with the following instructions:

```
press <F1> to RESUME
```

Write down the message and press the F1 key to continue the bootup sequence.

### 4.1.1 System configuration verification

These routines check the current system configuration against the values stored in the card's CMOS memory. If they do not match, the program outputs an error message. You will then need to run the BIOS setup program to set the configuration information in memory.

There are three situations in which you will need to change the CMOS settings:

1. You are starting your system for the first time.
2. You have changed the hardware attached to your system.
3. The CMOS memory has lost power and the configuration information has been erased.

The POS-7551's CMOS memory has an integral lithium battery backup. The battery backup should last ten years in normal service, but when it finally runs down, you will need to replace the complete unit.

## 4.2 Award BIOS setup

Award's BIOS ROM has a built-in Setup program that allows users to modify the basic system configuration. This type of information is stored in battery-backed CMOS RAM so that it retains the Setup information when the power is turned off.

### 4.2.1 Entering setup

Power on the computer and press <Del> immediately. This will allow you to enter Setup.



Figure 4-1: Setup program initial screen



### 4.2.3 BIOS features setup

By choosing the BIOS FEATURES SETUP option from the INITIAL SETUP SCREEN menu, the screen below is displayed. This sample screen contains the manufacturer's default values for the POS-7551.

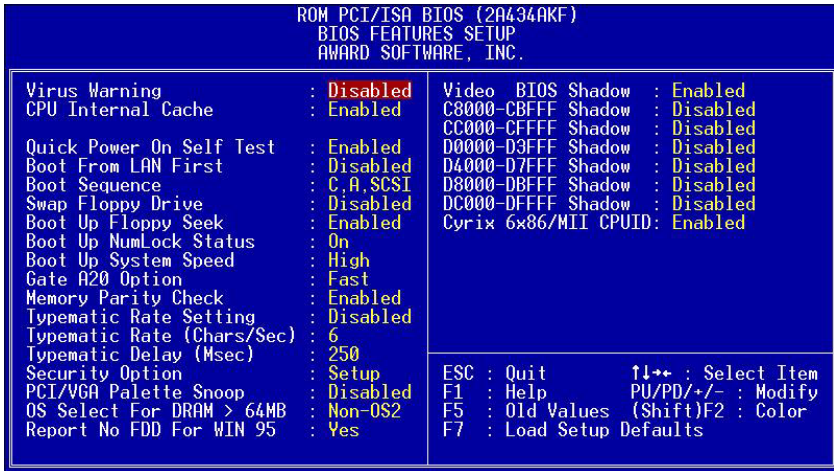


Figure 4-3: BIOS features setup screen

## 4.2.4 Chipset features setup

By choosing the CHIPSET FEATURES SETUP option from the INITIAL SETUP SCREEN menu, the screen below is displayed. This sample screen contains the manufacturer's default values for the POS-7551.

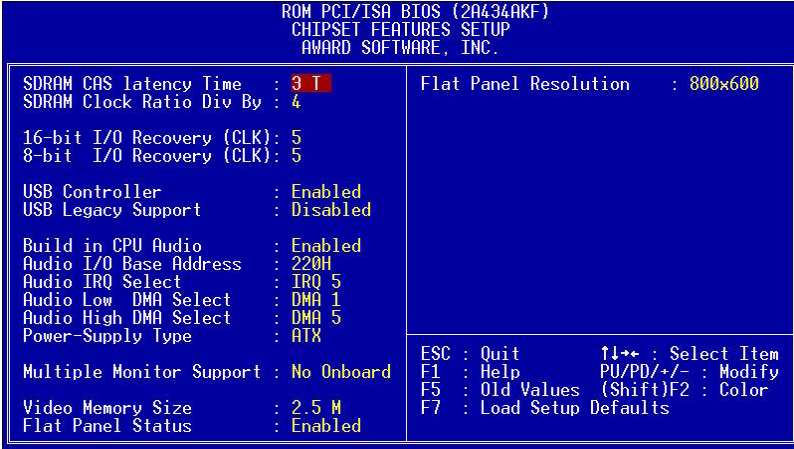


Figure 4-4: Chipset features setup screen

## 4.2.5 Power management setup

By choosing the POWER MANAGEMENT SETUP option from the INITIAL SETUP SCREEN menu, the screen below is displayed. This sample screen contains the manufacturer's default values for the POS-7551.

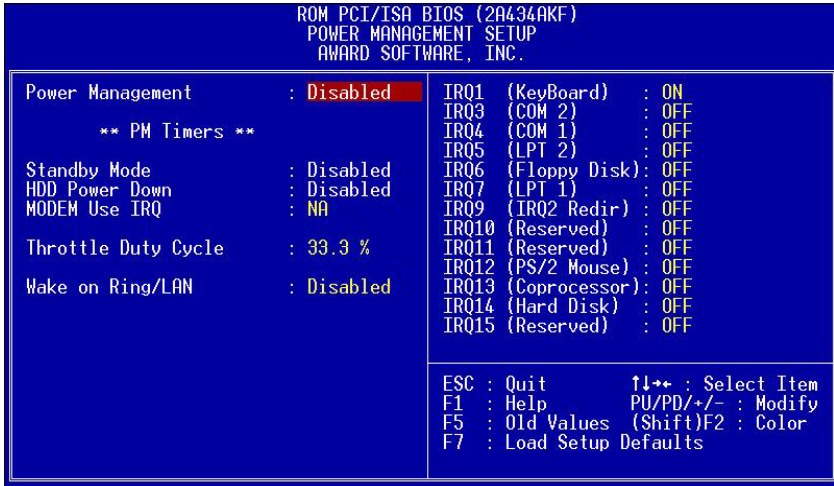


Figure 4-5: Power management setup screen

### 4.2.6 PnP/PCI configuration setup

By choosing the PNP/PCI CONFIGURATION option from the INITIAL SETUP SCREEN menu, the screen below is displayed. This sample screen contains the manufacturer's default values for the POS-7551.

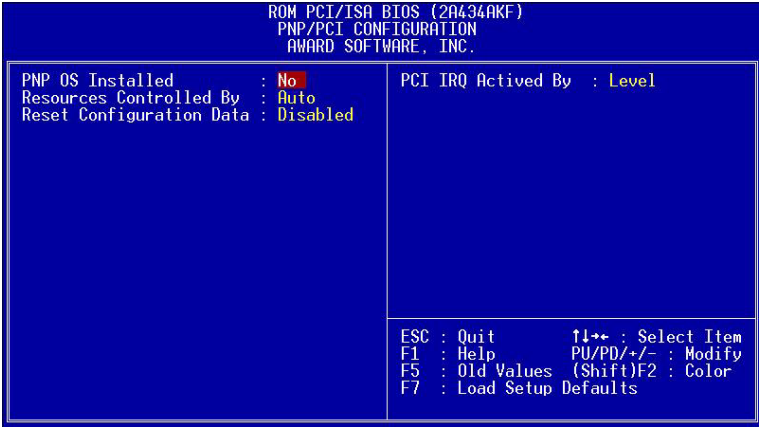


Figure 4-6: PCI configuration setup screen

## 4.2.7 Integrated peripherals

By choosing the INTEGRATED PERIPHERALS option from the INITIAL SETUP SCREEN menu, the screen below is displayed. This sample screen contains the manufacturer's default values for the POS-7551.

```
ROM PCI/ISA BIOS (2A434AKF)
INTEGRATED PERIPHERALS
AWARD SOFTWARE, INC.

IDE HDD Block Mode      : Enabled
Primary IDE Channel    : Enabled
Master Drive PIO Mode  : Auto
Slave Drive PIO Mode   : Auto
Secondary IDE Channel  : Enabled
Master Drive PIO Mode  : Auto
Slave Drive PIO Mode   : Auto

IDE Primary Master UDMA : Auto
IDE Primary Slave UDMA : Auto
IDE Secondary Master UDMA : Auto
IDE Secondary Slave UDMA : Auto

Init Display First     : PCI Slot

KBC input clock       : 8 MHz
Onboard FDC Controller : Enabled
Onboard Serial Port 1 : 3F8
Onboard Serial Port 2 : 2F8
Onboard Parallel Port :

Parallel Port Mode    :
ECP Mode Use DMA     : 3
EPP Mode Select      : EPP1_9
Onboard Serial Port 3 : Disabled
Onboard Serial Port 4 : Disabled

Onboard Parallel Port 2 : Disabled
Parallel Port 2 Mode   : SPP
```

Figure 4-7: Integrated peripherals setup screen

## 4.2.8 Load BIOS defaults

LOAD BIOS DEFAULTS loads the default system values directly from ROM. If the stored record created by the Setup program becomes corrupted (and therefore unusable), these defaults will load automatically when you turn the POS-7551 on.

## 4.2.9 Change password

To change the password, choose the PASSWORD SETTING option from the Setup main menu and press <Enter>.

1. If the CMOS is bad or this option has never been used, there is default password which is stored in the ROM. The screen will display the following messages:

### Enter Password:

Press <Enter>.

2. If the CMOS is good or this option has been used to change the default password, the user is asked for the password stored in the CMOS. The screen will display the following message:

### Confirm Password:

Enter the current password and press <Enter>.

3. After pressing <Enter> (ROM password) or the current password (user-defined), you can change the password stored in the CMOS. The password can be at most 8 characters long.

Remember - to enable this feature, you must first select either Setup or System in the BIOS FEATURES SETUP.

### 4.2.10 Auto detect hard disk

The IDE HDD AUTO DETECTION utility can automatically detect the IDE hard disk installed in your system. You can use it to self-detect and/or correct the hard disk type configuration.

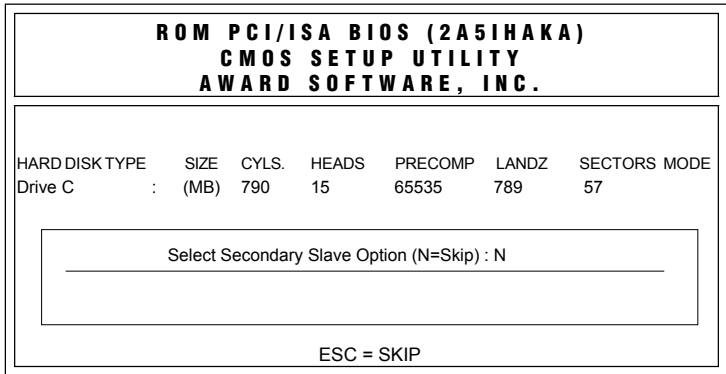


Figure 4-9: IDE HDD auto detection screen

### 4.2.11 Save & exit setup

If you select this option and press <Enter>, the values entered in the setup utilities will be recorded in the chipset's CMOS memory. The microprocessor will check this every time you turn your system on and compare this to what it finds as it checks the system. This record is required for the system to operate.

### 4.2.12 Exit without saving

Selecting this option and pressing <Enter> lets you exit the Setup program without recording any new values or changing old ones.



# CHAPTER 5

## VGA and Audio Setup (5530A chipset)

- Introduction
- Installation of SVGA driver for Windows 3.1/9x/NT

## 5.1 Introduction

---

The POS-7551 has an on-board LCD/VGA interface. The specifications and features are described as follows:

### 5.1.1 Chipset (NS CX5530A) (POS-7551)

The POS-7551 uses a NS CX5530A chipset for its SVGA controller. It supports many popular 18-bit LCD displays and conventional analog CRT monitors. The VGA BIOS supports LCD. In addition, it also supports interlaced and non-interlaced analog monitors (color and monochrome VGA) in high-resolution modes while maintaining complete IBM VGA compatibility. Digital monitors (i.e. MDA, CGA, and EGA) are NOT supported. Multiple frequency (multisync) monitors are handled as if they were analog monitors.

### 5.1.2 Display memory

With 1.5 ~ 2.5 MB shared memory, the VGA controller can drive CRT displays or color panel displays with resolutions up to 1280 x 1024 at 256 colors. The display memory can be expanded to 2.5 MB in BIOS for 64K color resolution of 1024 x 768.

## 5.2 Installation of CX5530A chipset VGA and Audio driver

---

Complete the following steps to install the SVGA driver. Follow the procedures in the flow chart that apply to the operating system that you are using within your POS-7551.

*Important:* The following windows illustrations are examples only. You must follow the flow chart instructions and pay attention to the instructions which then appear on your screen.

*Note 1:* The CD-ROM drive is designated as "D:" throughout this chapter.

*Note 2:* <Enter> means pressing the "Enter" key on the keyboard.


*Note 3:* When you are using a CRT display, please make sure that your flat panel resolution settings (in the BIOS setup) are the same as your VGA resolution settings (in Windows). Otherwise your display may behave strangely.

## 5.2.1 Installation for Windows 3.1 (VGA only)


1. In the Windows 3.1 Main screen, click on the "Windows Setup" icon.



2. In the "Windows Setup" window, choose "Options", then select "Change System Settings".

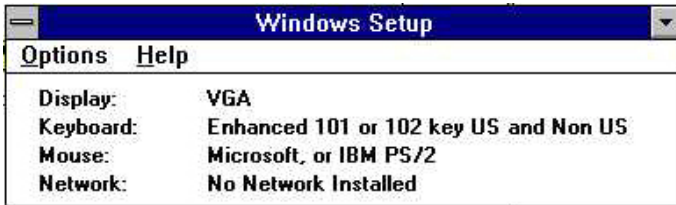

3. In the "Change System Settings" window, select the "Display" item. In the dropdown selection, select "Other display {Requires disk from OEM}" .

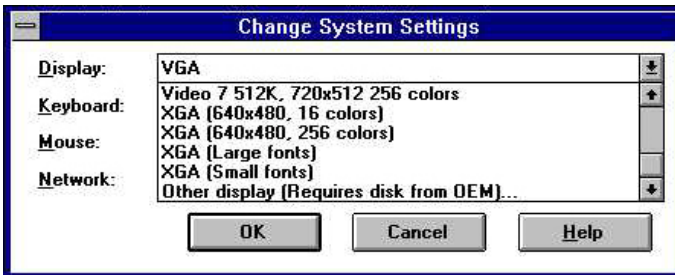

4. Type in the correct path like the window below, where drive "D" is the CD ROM drive. For example,  
**D:\POS\7551\CHIPSET\WIN31**



5. Select the display type and preferred resolution, then click "OK".




6. Choose "Restart Windows".




## 5.2.2 Installation for Windows 95/98 VGA and Audio

Please note: when you setup VGA for 95/98, it installs audio at the same time)


1. a. Browse

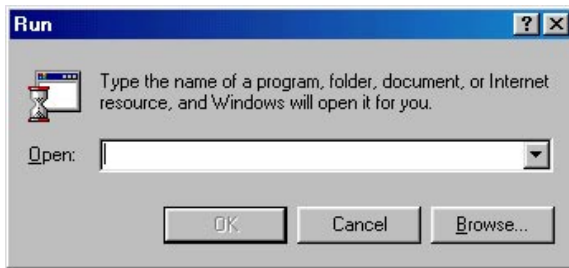


2. Choose "Open".

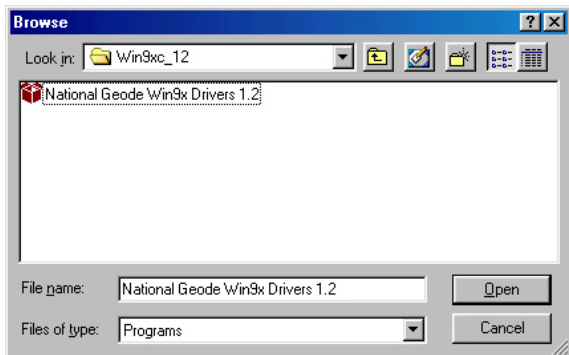


3. Type in the correct path like the window below, where drive "D" is the CD ROM drive. For example,  
**D:\POS\7551\Chipset\Win9xc\_12\National Geode**

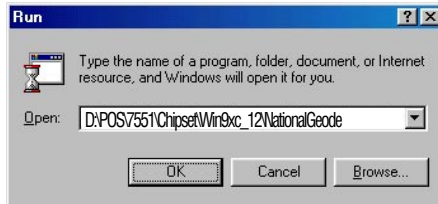


4. Click "Finish".

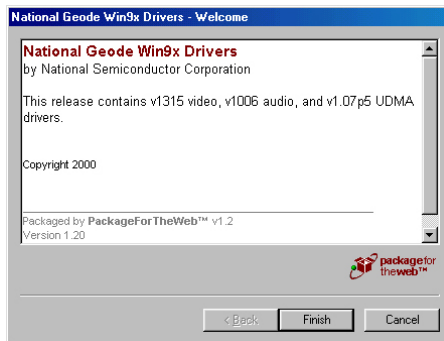


5. Click "Next" to proceed to the next step.

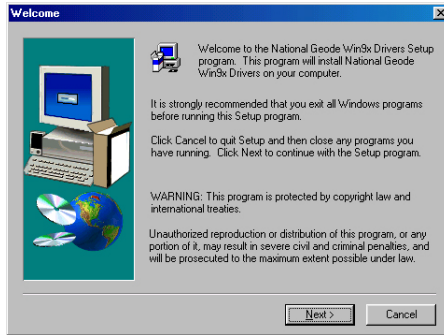


6. Click "yes" after you read and accept the license agreement.

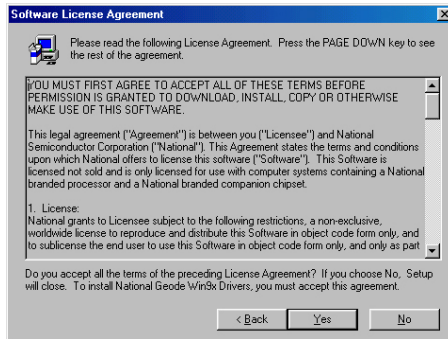


7. Click "next" after choosing the proper location.

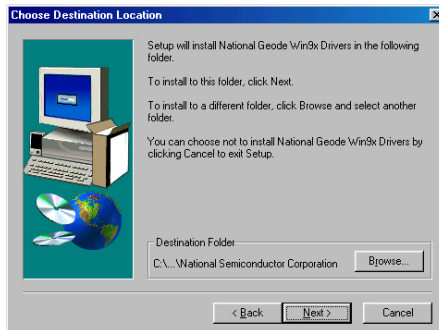

8. Select typical, press next

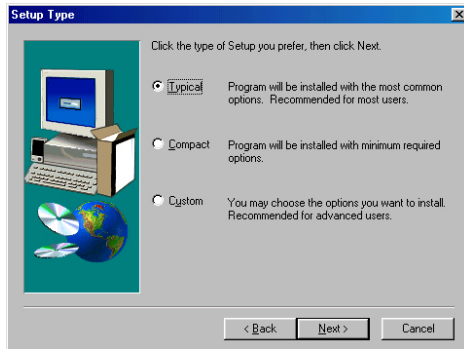

9. Insert the Windows 98 CD-ROM, then click OK.

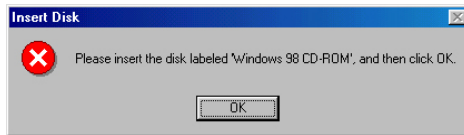


10. Choose "Yes", then click "Finish" to restart the computer.




### 5.3 Installation for Windows NT Audio (CX5530A)


1. a. Select "Start", "Settings", "Control panel".  
b. Double click "Multimedia".

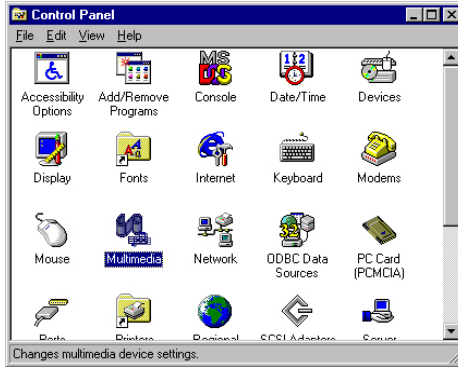


2. a. Select the "Devices" item.  
b. Click "add".

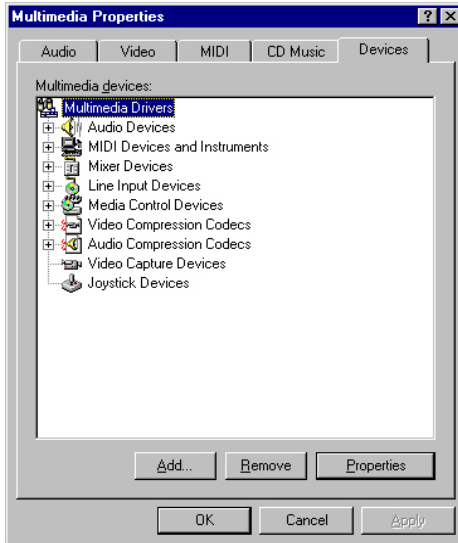


3. a. Select the "unlisted.." item.
- b. Click "OK".

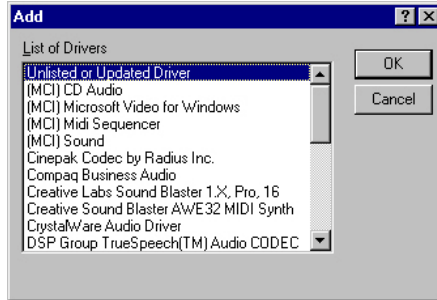


4. a. Click "Browse".

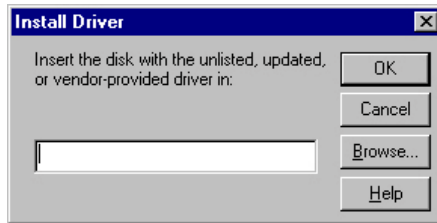


5. Click "OK".

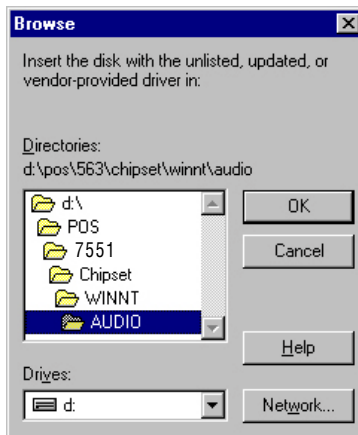


6. Type D:\POS\7551\Chipset\WINNT\Audio

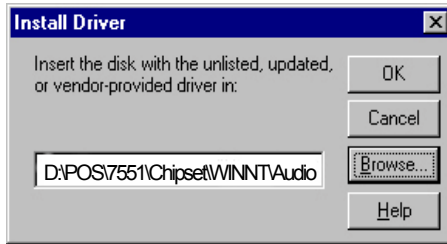


7. a. Choose the highlighted item.  
b. Click the "OK" button.

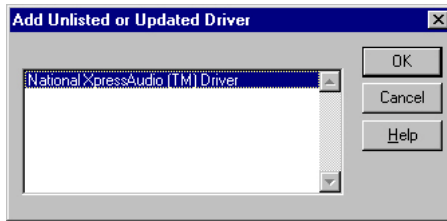


8. a. Set the I/O address.  
b. Click "Continue".

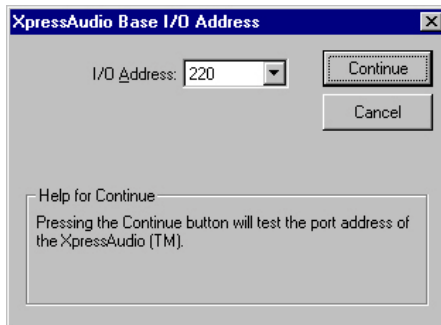

9. a. Set Xpress Audio configuration.
- b. Click "OK".

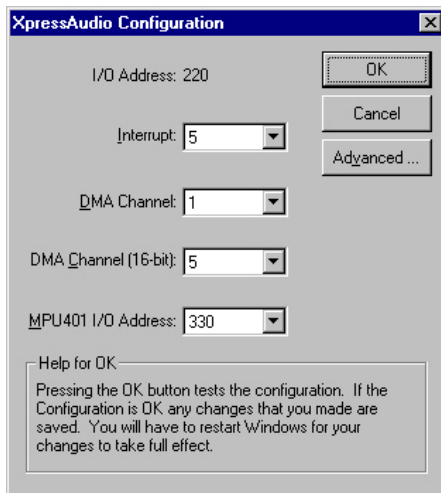

4. Click "Restart Now".

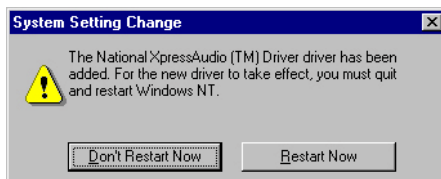


## 5.4 Installation for Windows NT VGA for CX5530A


1. a. Select "Start", "Settings", "Control Panel".  
b. Double click the "Display" icon.




2. a. Choose the "Settings" label.  
b. Press the "Display Type" button.

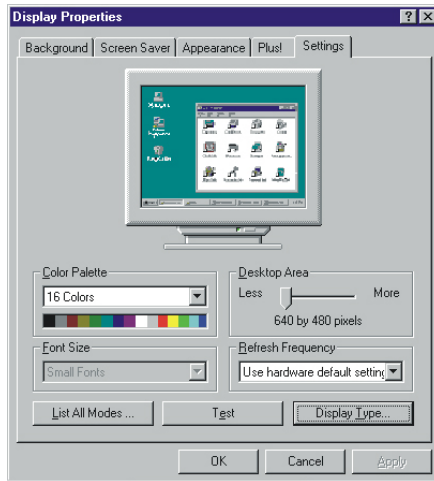


- 3 a. Press the "Change..." button.

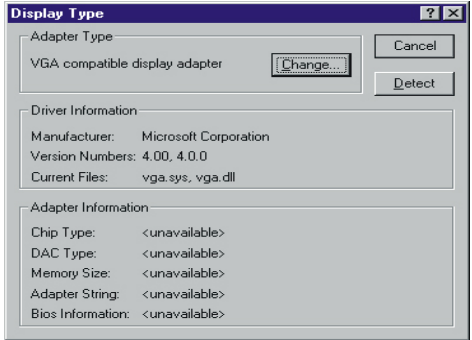


4. Click the "Have Disk" button.

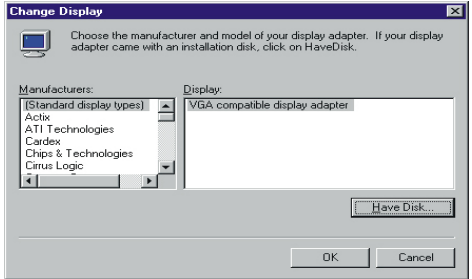


5. a. Insert the utility disc into the CD-ROM drive.  
b. Type **D:\POS\7551\chipset\winnt\vga**  
c. Press the "OK" button.

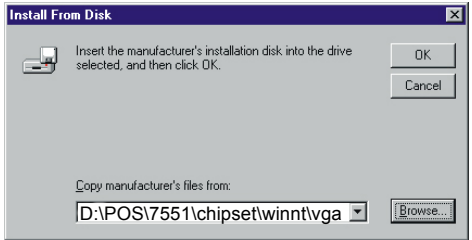


- 6 a. Select the highlighted item.
- b. Press the "OK" button.

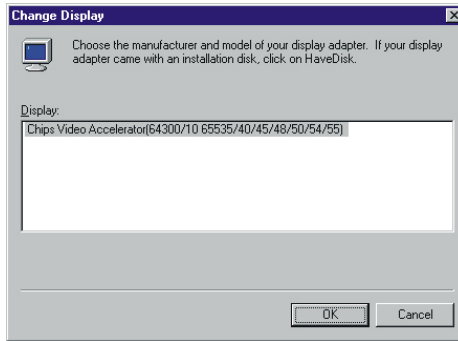


7. Press "Yes" to proceed.

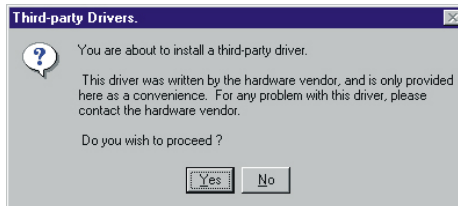

8. a. Press "OK" to reboot.

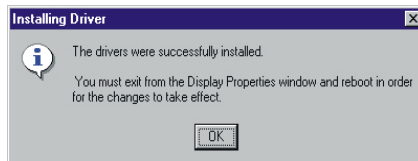

9.
  - a. Repeat Step 1 in this manual, to select the "Settings" label.
  - b. Adjust resolution and color.
  - c. Click "Test" to see the result.
  - d. Click "OK" to save the setting.

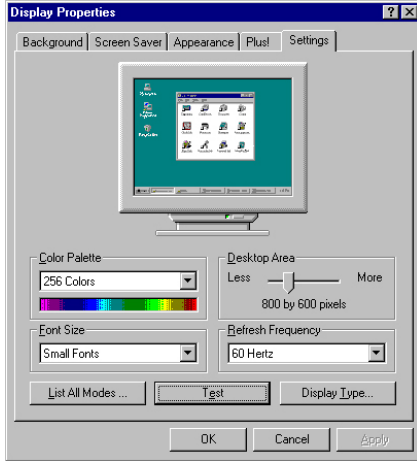

# CHAPTER 6

## PCI Bus Ethernet Interface

This chapter provides information on Ethernet configuration.

- Introduction
- Installation of Ethernet driver for Windows 95/98/NT
- Further information

## 6.1 Introduction

---

The POS-7551 is equipped with a high performance 32-bit Ethernet chipset which is fully compliant with IEEE 802.3 100 Mbps CSMA/CD standards. It is supported by major network operating systems. It is also both 100Base-T and 10Base-T compatible. The medium type can be configured via the RSET8139.exe program included on the utility disk.

The Ethernet port provides a standard RJ-45 jack on board. The network boot feature can be utilized by incorporating the boot ROM image files for the appropriate network operating system. The boot ROM BIOS files are combined with system BIOS, which can be enabled/disabled in the BIOS setup.

## 6.2 Installation of Ethernet driver

---

Before installing the Ethernet driver, note the procedures below. You must know which operating system you are using in your POS-563, and then refer to the corresponding installation flow chart. Then just follow the steps described in the flow chart. You will quickly and successfully complete the installation, even if you are not familiar with instructions for MS-DOS or Windows.

*Note: The windows illustrations in this chapter are examples only. You must follow the flow chart instructions and pay attention to the instructions which then appear on your screen.*

### 6.2.1 Installation for MS-DOS and Windows

If you want to set up your Ethernet connection under the MS-DOS or Windows environment, you should first check your server system model. For example, MS-NT, IBM-LAN server, and so on.


Then choose the correct driver to install in your panel PC.

## Installation for Windows 95/98


1. a. Select "Start", "Settings", "Control Panel"
- b. Double click "Network"




2. a. Click "add" and prepare to install network functions.

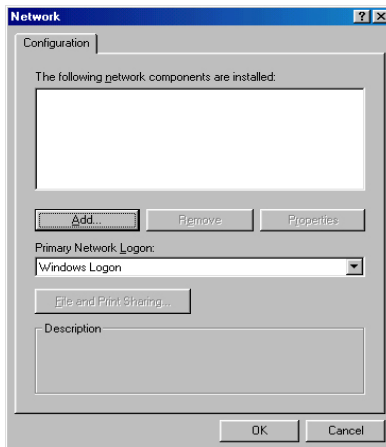


3. a. Select the "Adaptor" item to add the ethernet card.

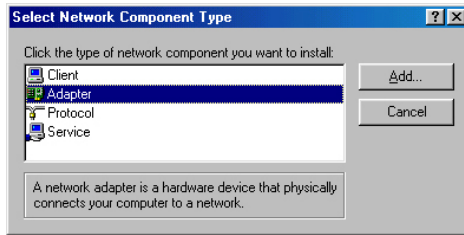


4. Click "Have Disk" to install the driver."

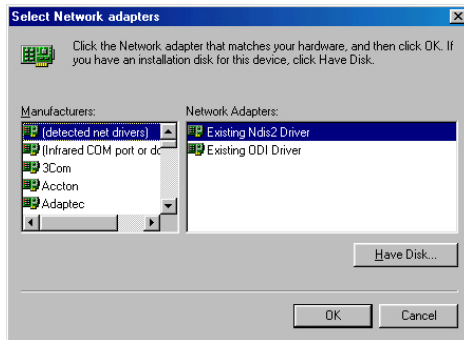


5. Click "Browse"

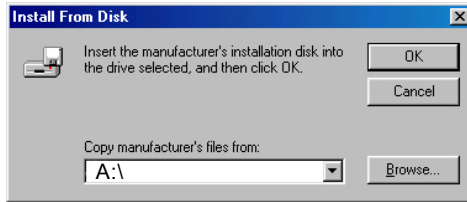


6. Select correct directory then click "OK".

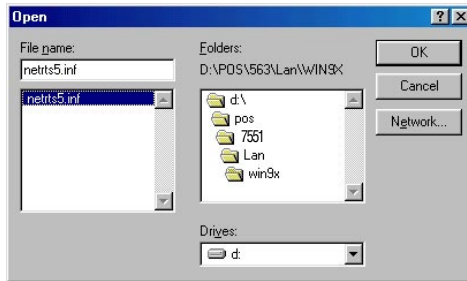


7. a. Insert the CD into the D:\drive.  
b. Fill in "D:\POS\7551\LANWIN9x"  
c. Click "OK".

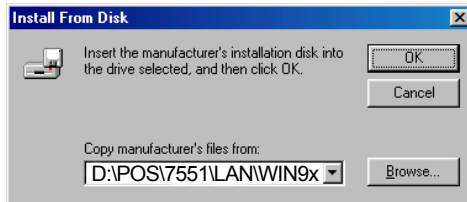


8. a. Choose the "Realtek" PCI item.  
b. Click "OK".

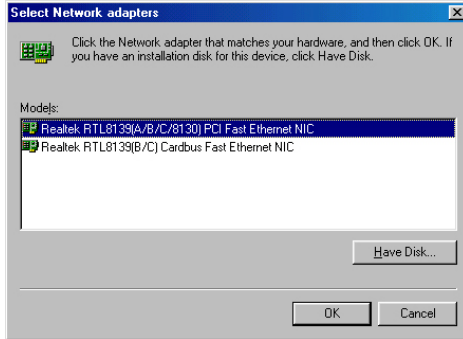


9. Click "OK".



10. Click "OK".

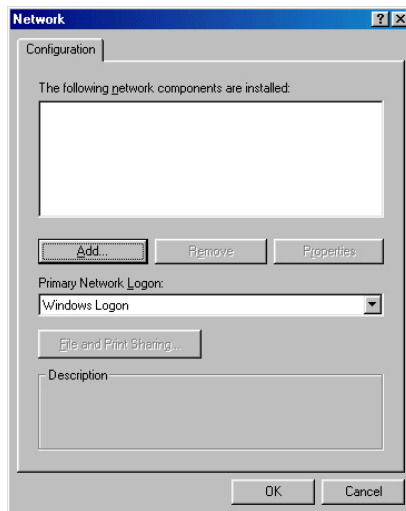


11. Click "Yes".

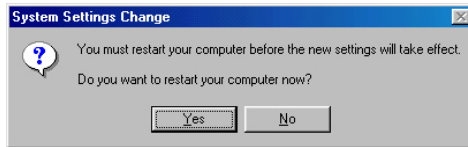


## 6.2.2 Installation for Windows NT


1. a. Select "Start", "Settings", "Control Panel".  
b. Double click, "Network".

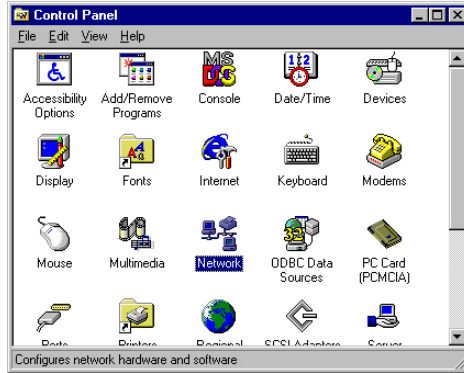


2. a. Choose the "Adaptors" label.  
b. Click the "add" button.

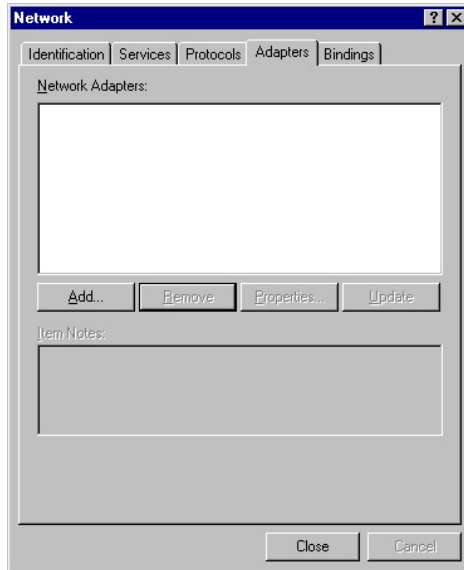


3. Press "Have Disk".

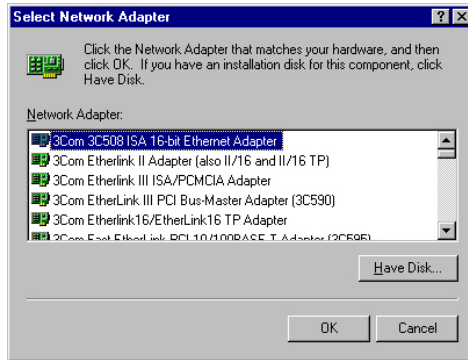


4. a. Insert the CD into the D: \drive.  
b. Fill in "D:\POS\7551\LAN\WINNT4"  
c. Click "OK".

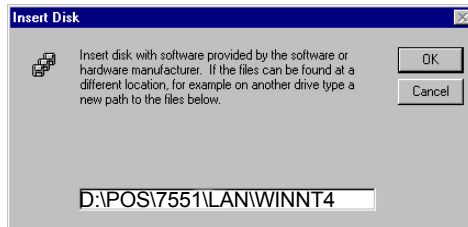


5. a. Click "OK"

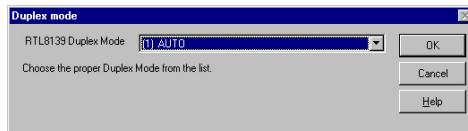

6. a. Click "add".

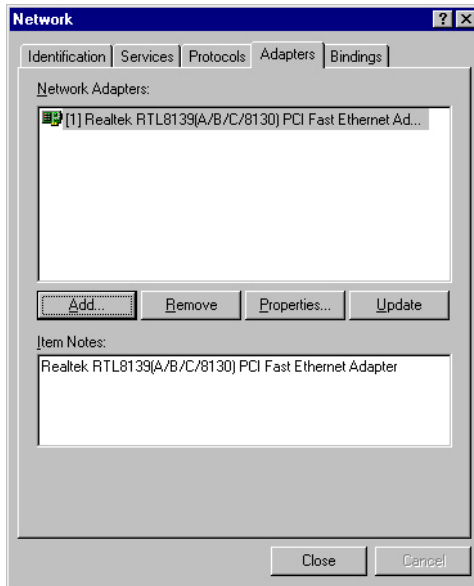

6. a. Click "yes".

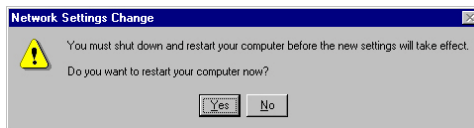

## Pin Assignments

This appendix contains information of a detailed or specialized nature. It includes:

- CD audio-in connector
- Audio connector
- ATX power connector
- Primary (3.5") and secondary (2.5") IDE connectors
- Digital I/O
- FDD connector
- COM1 ~ COM4 RS-232 connections
- FIR connector
- LPT1/2 connectors (parallel port)
- Contrast adjust connector
- Backlight control
- Brightness adjust connector
- Flat panel display connector
- CRT display connector
- System function connector

## A.1 LCD brightness adjust connector (CN1)

---

Table A-1: LCD brightness adjust Connector (CN1)

Pin	Pin Name
1	BRHI
2	BRIGHTNESS ADJ.
3	BLOW

## A.2 LCD contrast adjust connector (CN2)

---

Table A-2: LCD contrast adjust Connector (CN2)

Pin	Pin Name
1	CONHI
2	CONTRAST ADJ.
3	CONLOW

## A.3 System function connector (CN3)

---

Table A-3: System function connector (CN3)

<b>Pin</b>	<b>Pin name</b>	<b>Pin</b>	<b>Pin name</b>
<b>1</b>	<b>PW LED</b>	<b>2</b>	<b>+5V</b>
<b>3</b>	<b>PW LED</b>	<b>4</b>	<b>GND</b>
<b>5</b>	<b>GND</b>	<b>6</b>	<b>SPKB</b>
<b>7</b>	<b>KBLOCK*</b>	<b>8</b>	<b>SPKA</b>
<b>9</b>	<b>GND</b>	<b>10</b>	<b>NC</b>
<b>11</b>	<b>GND</b>	<b>12</b>	<b>HDDLED</b>
<b>13</b>	<b>PANSW*</b>	<b>14</b>	<b>GND</b>
<b>15</b>	<b>NC</b>	<b>16</b>	<b>NC</b>
<b>17</b>	<b>NC</b>	<b>18</b>	<b>FPRST</b>
<b>19</b>	<b>GND</b>	<b>20</b>	<b>GND</b>

## A.4 ATX power connector (CN4)

---

Table A-4: ATX power connector (CN4)

Pin	Pin name	Pin	Pin name
1	3.3V	11	3.3V
2	3.3V	12	-12V
3	GND	13	GND
4	+5V	14	PSON*
5	GND	15	GND
6	+5V	16	GND
7	GND	17	GND
8	PWROK	18	-5V
9	+5VSB	19	+5V
10	+12V	20	+5V

## A.5 Digital I/O (CN5)

---




Table A-5: Digital I/O (CN5)

Pin	Pin name	Pin	Pin name
1	+5V	2	+5V
3	+12V	4	+12V
5	DI/O OUT 0	6	DI/O OUT 1
7	DI/O IN 0	8	DI/O IN 1
9	GND	10	GND

## A.6 LCD backlight connector (CN6)

---

Table A-6: LCD backlight Connector (CN6)

<b>Pin</b>	<b>Pin name</b>
<b>1</b>	<b>+12V</b>
<b>2</b>	<b>GND</b>
<b>3</b>	<b>ENABLE BACKLIGHT</b>
<b>4</b>	<b>BRIGHTNESS ADJ.</b>
<b>5</b>	<b>+5V</b>

## A.7 IR connector (CN7)

---

Table A-7: IR Connector (CN7)

<b>Pin</b>	<b>Pin name</b>
<b>1</b>	<b>+5V</b>
<b>2</b>	<b>FIRIN</b>
<b>3</b>	<b>SIRIN</b>
<b>4</b>	<b>GND</b>
<b>5</b>	<b>SIROUT</b>

# A.8 Secondary slave IDE connector (CN8)




Table A-8: Secondary slave Connector (CN8)

Pin	Pin name	Pin	Pin name
1	IDE RESET*	2	GND
3	D7	4	D8
5	D6	6	D9
7	D5	8	D10
9	D4	10	D11
11	D3	12	D12
13	D2	14	D13
15	D1	16	D14
17	D0	18	D15
19	GND	20	NC
21	IDE DREQ	22	GND
23	IOW*	24	GND
25	IOR*	26	GND
27	CHRDY	28	NC
29	IDE DACK*	30	GND
31	IDE IRQ	32	NC
33	A1	34	NC
35	A0	36	A2
37	CS0*	38	CS1*
39	ACTIVE*	40	GND
41	+5V	42	+5V
43	GND	44	NC

## A.9 FDD connector (CN9)

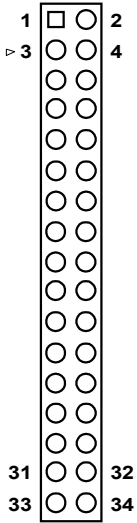


Table A-9: FDD connector (CN9)

Pin	Signal	Pin	Signal
1	GND	2	DENSITY SELECT*
3	GND	4	N/C
5	GND	6	DRIVE TYPE
7	GND	8	INDEX*
9	GND	10	MOTOR 0*
11	GND	12	DRIVE SELECT 1*
13	GND	14	DRIVE SELECT 0*
15	GND	16	MOTOR 1*
17	GND	18	DIRECTION*
19	GND	20	STEP*
21	GND	22	WRITE DATA*
23	GND	24	WRITE GATE*
25	GND	26	TRACK 0*
27	GND	28	WRITE PROTECT*
29	GND	30	READ DATA*
31	GND	32	HEAD SELECT*
33	GND	34	DISK CHANGE*

# A.10 Primary IDE connector (CN10)

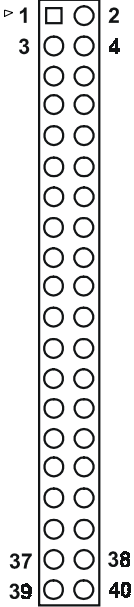


Table A-10: Primary IDE Connector (CN10)

Pin	Pin name	Pin	Pin nme
1	IDE RESET*	2	GND
3	D7	4	D8
5	D6	6	D9
7	D5	8	D10
9	D4	10	D11
11	D3	12	D12
13	D2	14	D13
15	D1	16	D14
17	D0	18	D15
19	GND	20	NC
21	IDE DREQ	22	GND
23	IOW*	24	GND
25	IOR*	26	GND
27	CHRDY	28	NC
29	IDE DACK*	30	GND
31	IDE IRQ	32	NC
33	A1	34	NC
35	A0	36	A2
37	CS0*	38	CS1*
39	ACTIVE*	40	GND

## A.11 COM4 connector (CN13)

---

Table A-11: COM4 connector (CN13)

Pin	Pin name	Pin	Pin name
1	CD	2	DSR
3	RX	4	RTS
5	TX	6	CTS
7	DTR	8	RI(set by J3,J4)
9	GND	10	GND

## A.12 LPT2 connector (CN14)

---

Table A-12: LPT2 connector (CN14)

Pin	Pin name	Pin	Pin name
1	STROBE*	2	AUTO FEED*
3	PD0	4	ERROR*
5	PD1	6	INIT*
7	PD2	8	SELECT IN*
9	PD3	10	GND
11	PD4	12	GND
13	PD5	14	GND
15	PD6	16	GND
17	PD7	18	GND
19	ACK*	20	GND
21	BUSY	22	GND
23	PE	24	GND
25	SELECT	26	NC

## A.13 LCD 18 bit connector For Cyrix chipsets (CN15)

### Type: Pin-Header 44-Pin 2.0 mm

TableA-13: LCD 24Bit Connector		():Color bits for 18-bit TFT LCD	
Pin	Pin name	Pin	Pin name
1	+12V	2	+12V
3	GND	4	GND
5	VDD(set by J2)	6	VDD(set by J2)
7	NC	8	GND
9	NC	10	NC
11	P2(B0)	12	P3(B1)
13	P4(B2)	14	P5(B3)
15	P6(B5)	16	P7(B5)
17	NC	18	NC
19	P10(G0)	20	P11(G1)
21	P12(G2)	22	P13(G3)
23	P14(G4)	24	P15(G5)
25	NC	26	NC
27	P18(R0)	28	P19(R1)
29	P20(R2)	30	P21(R3)
31	P22(R4)	32	P23(R5)
33	GND	34	GND
35	SHFCLK	36	FLM(V-SYNC)
37	M(DE)	38	LP(H-SYNC)
39	GND	40	ENABLE BACK-LIGHT
41	NC	42	LCD CLK EVEN
43	ENAVDD	44	NC

\* low active

## A.14 COM3 connector (CN16)

---

Table A-14: COM3 connector (CN16)

Pin	Pin name	Pin	Pin name
1	CD	2	DSR
3	RX	4	RTS
5	TX	6	CTS
7	DTR	8	RI(set by J3,J4)
9	GND	10	GND

## A.15 COM2 connector (CN17)

---

Table A-15: COM2 connector (CN17)

Pin	Pin name	Pin	Pin name
1	CD	2	DSR
3	RX	4	RTS
5	TX	6	CTS
7	DTR	8	RI (set by J5,J6)
9	GND	10	GND

## A.16 COM1 connector (CN18)

Table A-16: COM1 connector (CN18)

Pin	Pin name	Pin	Pin name
1	CD	2	DSR
3	RX	4	RTS
5	TX	6	CTS
7	DTR	8	RI (set by J5,J6)
9	GND	10	GND

## A.17 Audio connector (CN19)




Table A-17: Audio connector (CN19)

Pin	Signal	Pin	Signal
1	SPEAKER OUT R	2	GND
3	SPEAKER OUT L	4	GND
5	LINE OUT R	6	LINE OUT L
7	GND	8	GND
9	LINE IN R	10	LINE IN L
11	GND	12	GND
13	N/A	14	MIC in L
15	MIC IN R	16	GND

## A.18 CD audio-in connector (CN20)




Table A-18: CD audio-in connector (CN20)

Pin	Signal
1	CD ROM L
2	GND
3	GND
4	CD ROM R

## A.19 LPT1 connector (CN22)

Table A-19: LPT1 connector (CN22)

Pin	Pin name	Pin	Pin name
1	STROBE*	14	AUTO FEED*
2	PD0	15	ERROR*
3	PD1	16	INIT*
4	PD2	17	SELECT IN*
5	PD3	18	GND
6	PD4	19	GND
7	PD5	20	GND
8	PD6	21	GND
9	PD7	22	GND
10	ACK*	23	GND
11	BUSY	24	GND
12	PE	25	GND
13	SELECT		

## A.20.1 PS/2 mouse connector (CN23)

---

Table A-20.1: PS/2 Mouse Connector (CN23)

Pin	Pin name
1	MS DATA
2	NC
3	GND
4	+5V
5	MS CLOCK
6	NC

## A.20.2 Keyboard connector (CN23)

---

Table A-20.2: Keyboard Connector (CN23)

Pin	Pin name
1	KB DATA
2	NC
3	GND
4	+5V
5	KB CLOCK
7	NC

## A.21 COM1 connector (CN25)

---

Table A-21: COM1 connector (CN25)

<b>Pin</b>	<b>Pin name</b>	<b>Pin</b>	<b>Pin name</b>
<b>1</b>	<b>CD</b>	<b>6</b>	<b>DSR</b>
<b>2</b>	<b>RX</b>	<b>7</b>	<b>RTS</b>
<b>3</b>	<b>TX</b>	<b>8</b>	<b>CTS</b>
<b>4</b>	<b>DTR</b>	<b>9</b>	<b>RI(set by J5,J6)</b>
<b>5</b>	<b>GND</b>		

## A.22 CRT connector (CN26)

---

Table A-22: CRT connector (CN26)

<b>Pin</b>	<b>Pin name</b>	<b>Pin</b>	<b>Pin name</b>
<b>1</b>	<b>RED</b>	<b>2</b>	<b>Green</b>
<b>3</b>	<b>Blue</b>	<b>4</b>	<b>NC</b>
<b>5</b>	<b>GND</b>	<b>6</b>	<b>GND</b>
<b>7</b>	<b>GND</b>	<b>8</b>	<b>GND</b>
<b>9</b>	<b>NC</b>	<b>10</b>	<b>GND</b>
<b>11</b>	<b>NC</b>	<b>12</b>	<b>DDC Data</b>
<b>13</b>	<b>H-SYNC</b>	<b>14</b>	<b>V-SYNC</b>
<b>15</b>	<b>DDC Clock</b>		

