

# ITM-5115

## 15" XGA Industrial LED Monitor with Fully Flat Resistive Touchscreen

NEW



### Features

- 15" LED backlight panel with XGA resolution (1024 x 768)
- IP54 compliant, flat-sealed front panel design
- Wide temperature support: from -20° C to +60° C
- VGA & DVI input interface
- Supports panel, wall, desktop, and swing-arm VESA mounting
- Combo RS-232 & USB interface for touchscreen function
- Optional ARK-1500-series box PC in rear AD box for all-in-one, total solution



### Introduction


ITM-5115 is a 15" LED TFT-LCD touchscreen monitor specifically designed for industrial applications. It's a stable, rugged display with with VGA & DVI outputs. The simple, yet elegant flat plane design provides for easy cleaning, and the BOX PC-monitor option offers added flexibility.

### Specifications

Display	Size	AUO 15" LED backlight panel
	Resolution (Pixels)	1024 x 768 (XGA)
	Viewing Angle	80° /80° /80° /60°
	Brightness (cd/m <sup>2</sup> )	400 (cd/m <sup>2</sup> )
	T/S function	AMT 5-Wire Resistive flat touch screen
	Lamp Life (hrs)	50,000 hrs
	Long-term Support	3-year minimum
Environment	Operating Temperature	-20° C (with ARK-1500 series only) +60° C
	Storage Temperature	-20 ~ 70° C (-22 ~ 140° F)
	Humidity	5 ~ 95% @ 40° C, non-condensing
	Front panel	IP54
System	IO	VGA x 1; DVI x 1; 12 DC injet x 1; USB x 1; COM x 1 Keys: menu, up, down, signal switch (VGA/HMI), power on/off
	OSD	Menu Functions: brightness, volume, contrast, clock phase, horizontal position, vertical position and sharpness
	Power	60 W power adapter, with AC 100 ~ 240 V input and DC +12 V @ 4.16 A output

## Dimensions

Unit: mm

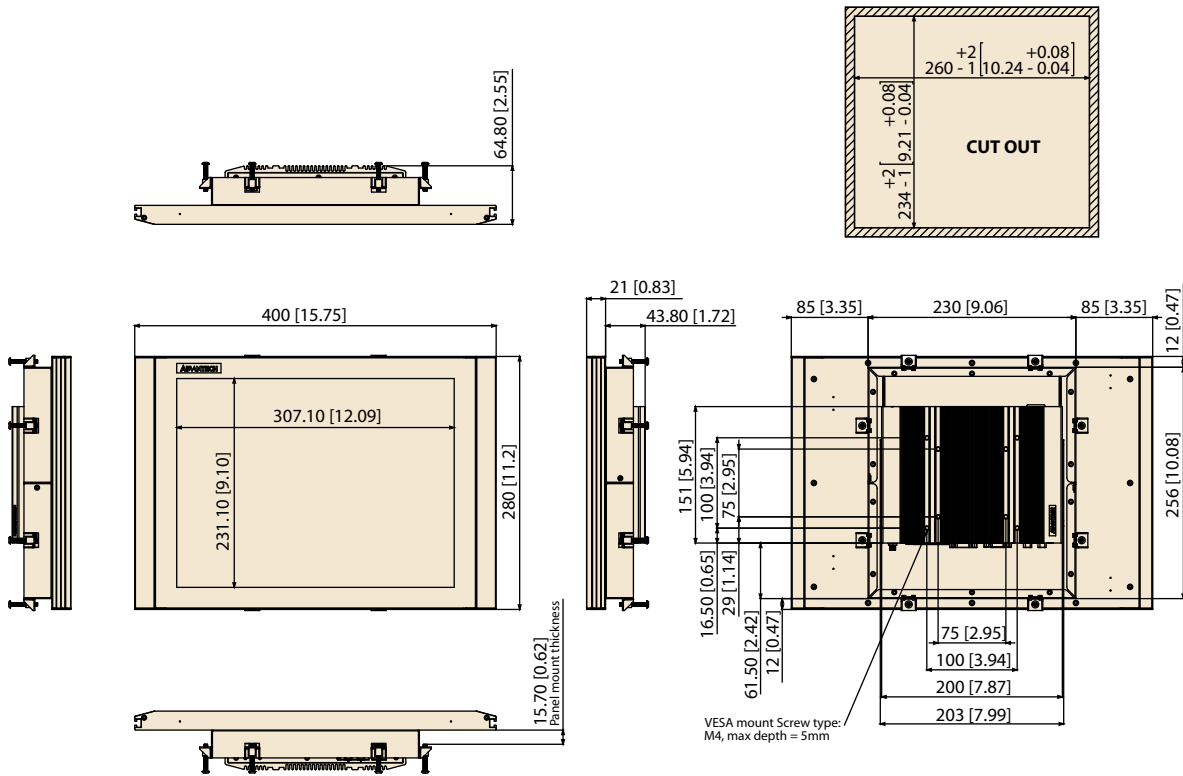

## Ordering Information

Model Name	Description
ITM-5115R-MA1E	15" XGA LED Fully Flat Touch Monitor
ITM-5115G-MA1E	15" XGA LED Industrial Monitor (w/o touch screen)
ITM-5115R-CA1E	15" XGA LED Touch Monitor with ARK-1503

## Optional Items

Part Number	Description
1757003062	ADAPTER AC100-240V 60W +12V/5A DPS-60PB A
TBA	Panel Mount kit
TBA	Stand kit