


**PCA-6654LB**  
**PCA-6653**  
**PCA-6646B**


**PCI-Bus LCD Display Card**  
**ISA-Bus LCD Display Card**  
**PCI-Bus SVGA Card**

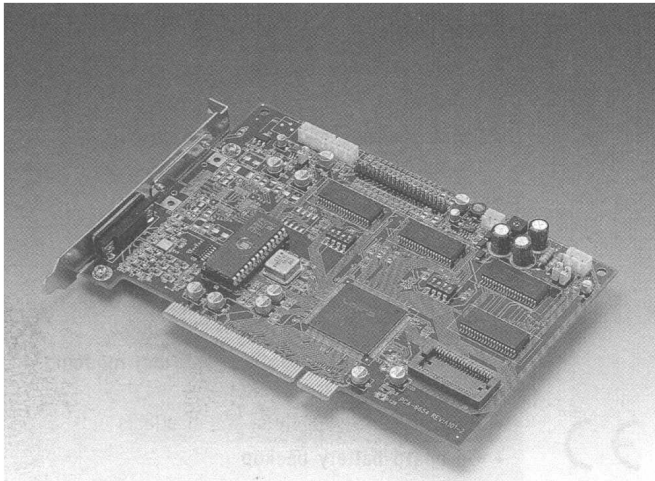

□ **PCA-6654LB**

**PCI-Bus LCD Display Card**


- Supports a wide range of LCD, EL and gas plasma flat panel displays and CRT VGA monitors
- 2 MB on-board DRAM; 256 KB x 16 DRAM Socket for frame buffer (optional)
- 32 data bus lines for high speed display
- Simultaneous CRT/LCD display
- 44-pin connection for LCD
- Power consumption: 1 A @ 5 V (Max.)
- Dimension: 174 x 98 mm ( 6.9" x 3.9" )
- Weight: 400g

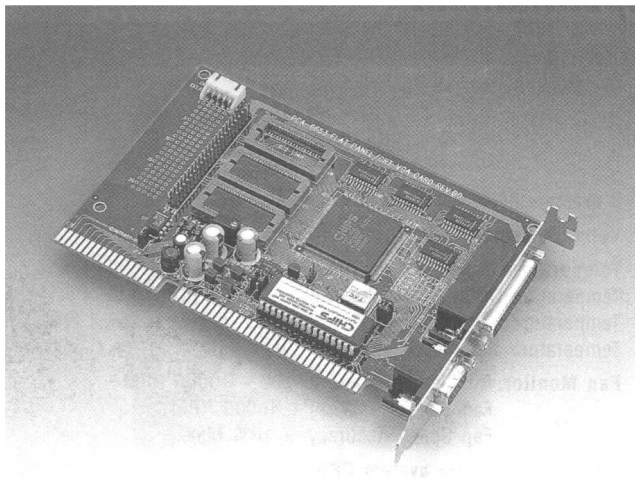

□ **PCA-6653**

**ISA-Bus LCD Display Card**

- Completely register and BIOS compatible with the IBM VGA . Supports a wide range of LCD, EL and gas plasma flat panel displays and CRT VGA monitors
- 1 MB on-board DRAM; 256 KB x 16 DRAM Socket for framebuffer (optional)
- 16 data bus lines for high speed display
- Simultaneous CRT/LCD display
- DB-44 for flat panel display, DB-15 for CRT
- 44-pin connection for LCD
- Power consumption: 1 A @ 5 V (Max.)
- Dimension: 158 x 105 mm ( 6.2" x 4.1" )
- Weight: 200g

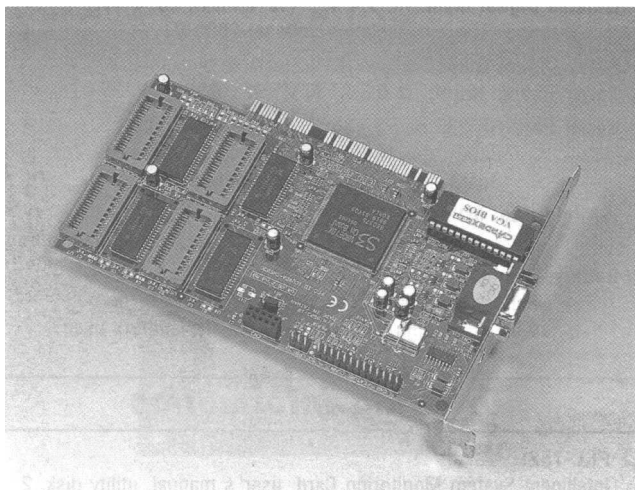

□ **PCA-6646B**

**PCI-Bus SVGA Card**

- S3 Virge DX chipset
- Max. resolution: up to 1600 x 1200 @ 256 colors . 2MB on-board DRAM
- SVGA/VGA/CGA compatible
- MPEG software support
- Dimension: 157 x 91 mm ( 6.2" x 3.6" )
- Weight: 150g