

# WebView-1000


# WebView-1240

10.4" VGA DSTN Browser-based Remote Operator Terminal

12.1" SVGA TFT Browser-based Remote Operator Terminal

## WebView-1000

10.4" VGA DSTN Browser-based Remote Operator Terminal

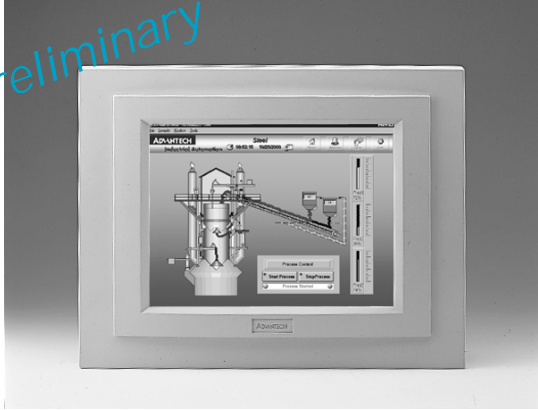


- **Display:** 10.4" VGA DSTN
- **LCD resolution:** 640 x 480 @ 64 K
- **CPU:** 5x86-133 MHz processor
- **DRAM:** 32 MB DRAM
- **Storage:** one 32 MB Disk-on-Chip
- **Serial ports:** 4 serial ports(one configurable to RS-422/485), 1 parallel port
- **Ethernet:** 10Base-T interface
- **Keyboard/Mouse:** PS/2 keyboard/mouse port
- **Touch screen:** analog resistive, continuous resolution
- **Housing:** Fire-resistant plastic, front panel meets NEMA4/IP 65
- **Expansion:** 2 ISA Slots (optional)
- **Power input:** 24 V<sub>DC</sub>, 2.2A maximum
- **Dimensions (WxHxD):** 342 x 265 x 61.6 (mm)
- **Weight:** 2.7 kg (5.9 lbs)

### Ordering Information

- **WebView-1000:**  
10.4" VGA DSTN Browser-based Remote Operator Terminal

## WebView-1240

12.1" SVGA TFT Browser-based Remote Operator Terminal

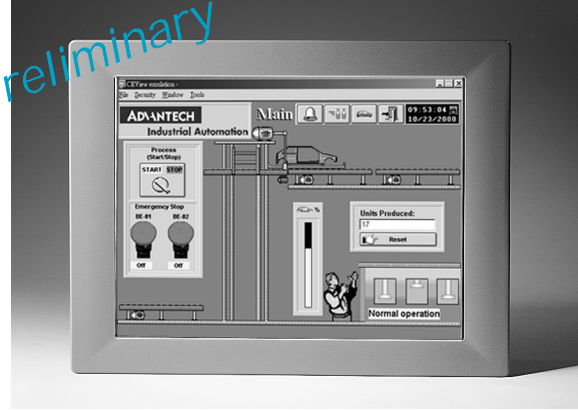

- **Display:** 12.1" SVGA TFT
- **LCD resolution:** 800 x 600 @ 256 K
- **CPU:** Intel® StrongARM 1110 processor
- **DRAM:** 32 MB SDRAM on board
- **Flash:** 16 MB on board
- **Storage:** Support one compactflash disk
- **Serial ports:** 3 serial ports (one configurable to RS-422/485), 1 parallel port,
- **Ethernet:** 10Base-T interface
- **Keyboard/Mouse:** PS/2 keyboard/mouse port
- **Touch screen:** 4-wire, analog resistive, continuous resolution
- **Housing:** NEMA4/IP65 compliant Al-Mg housing
- **Power input:** 24 V<sub>DC</sub>, 3A maximum
- **Dimensions (WxHxD):** 311 x 237 x 50 mm (12.24" x 9.33" x 1.97")
- **Weight:** 2.2 kg (4.85 lbs)

### Ordering Information

- **WebView-1240:**  
12.1" SVGA TFT Browser-based Remote Operator Terminal