




LEX/REX Turnkey 2224

Multimode Fiber Optic USB 2.0 Extender

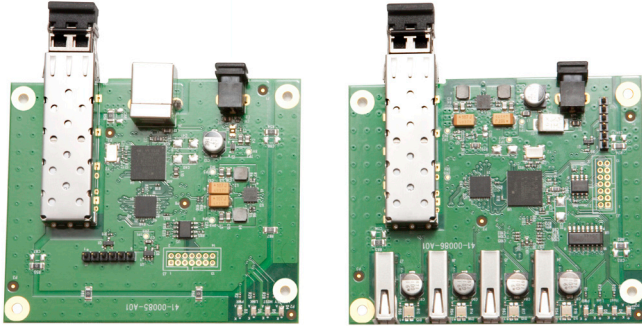


LEX/REX Turnkey 2224 extends USB 2.0 beyond the desktop up to 500m over multimode fiber optic cabling using ExtremeUSB® technology.

LEX/REX Turnkey 2224 Features

LEX/REX Turnkey 2224 hardware is ideal for OEM integration of ExtremeUSB® technology.

- Turnkey hardware provides a complete, working ExtremeUSB® solution without housing for integration into custom housings or larger systems.
- Powered by ExtremeUSB® Long reach USB 2.0 enabled by Icron's LionsGate™ USB 2.0 Extension ASIC.
- Extends USB 2.0 high-speed and USB 1.1 (low-speed, full speed) devices up to 500m over fiber optics.
- Supports all USB device types: Control, Interrupt, Bulk and Isochronous at up to 480Mbps.
- Operates with USB 2.0 high-speed host controllers and USB 1.1 classic hosts.
- True plug and play, ready to operate right out of the box. No new driver installation required.
- Supports all major operating systems including Windows®, Mac OS®, and Linux®.
- Integrated hub provides four remote USB 2.0 ports. Number of devices can be increased using additional USB hubs.
- AC power adapter at remote unit provides standard 500mA to each USB port.
- Power adapter at local unit is not required for normal operation.
- Ideal for a wide variety of USB devices, from printers, scanners, hard drives, and audio devices, to touch screens, web cams, and game controllers.

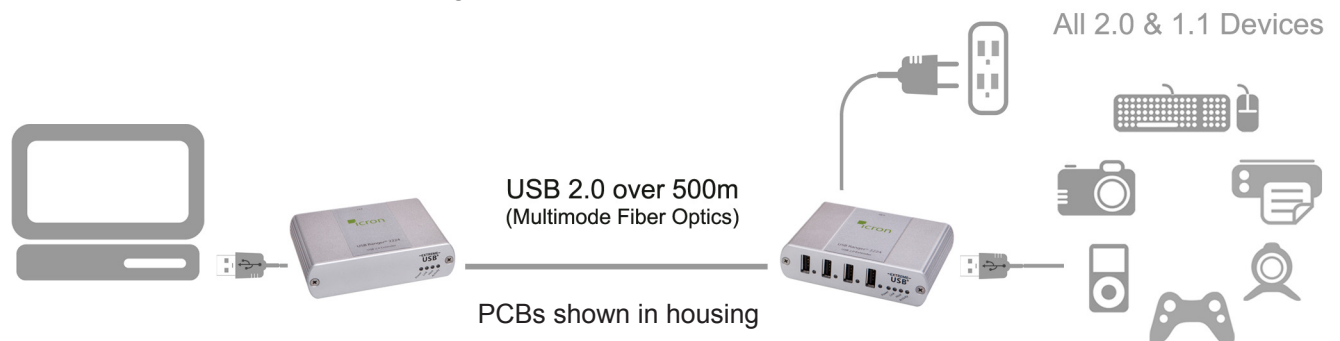

Ordering Information

The LEX/REX Turnkey 2224 system requires a LEX and REX unit and a power supply unit located at the REX. LEX/REX Turnkey 2224 components can be ordered individually to complete an OEM system as desired.

Name	Part Number	Description
------	-------------	-------------

Modules

Ranger 2224 LEX	10-00155	USB Ranger 2224 LEX Module, with housing, MM SFP optical module, no power supply
Ranger 2224 REX	10-00156	USB Ranger 2224 REX Module, with housing, MM SFP optical module, no power supply

Turnkey PCBs

Turnkey 2224 LEX	10-00165	Turnkey 2224 LEX PCB, with MM SFP optical module, without housing
Turnkey 2224 REX	10-00166	Turnkey 2224 REX PCB, with MM SFP optical module, without housing

Power Adapters

Power Adapter	21-00053	5V 3A, International (100-240V) Power Adapter
Power Cord	21-00055	Power Cord for 21-00053, North American Plug
Power Cord	21-00056	Power Cord for 21-00053, European Plug
Power Cord	21-00057	Power Cord for 21-00053, UK Plug
Power Cord	21-00058	Power Cord for 21-00053, Australian Plug

Product Specifications

Range	1640 ft (500m) over 50/125µm MMF 902 ft (275m) over 62.5/125µm MMF
LEX unit USB connector	1 x USB Type B
LEX unit Link connector	1 x SFP Duplex LC
REX unit Link connector	1 x SFP Duplex LC
REX unit USB connector	4 x USB Type A
Power adapter Maximum Rating	5V DC @ 3A
Current available to USB at REX	4 x 500mA
Operating temperature range	0°C to 50°C
LEX and REX unit dimensions	3.94" x 2.99" x 1.02" (100 mm x 76 mm x 26 mm)
LEX and REX PCB dimensions	3.35" x 2.76" x 0.65" (85 mm x 70 mm x 16.5 mm)
Turnkey PCB weights	LEX 0.11 lbs. (50 grams), REX 0.13 lbs. (60 grams)
Turnkey PCB with housing weights	LEX 0.42 lbs. (190 grams), REX 0.44 lbs. (200 grams)
Regulatory testing	FCC (Class B), IC (Class B), CE (Class B)
ESD Rating	EMC EN-61000-4-2:2001 8kV Contact, 16kV Air

Specifications subject to change without notification.

Contact sales@icron.com for more information or OEM options.