



Micro488/p™

Miniature Serial/IEEE 488 Controller



Features

- Smallest serial to IEEE 488 controller available
- Controls up to eight IEEE 488 instruments
- Programmed with concise ASCII commands
- Requires no external power supply—powered from the computer's serial port
- Features standard DB25 serial and IEEE 488 connectors
- Enables remote control of IEEE 488 instruments
- Easily connects to notebook PCs

Not much larger than a standard IEEE 488 connector, the **Micro488/p™** is the smallest serial to IEEE 488 controller on the market. Nonetheless, it features an on-board microcontroller, permitting it to interpret commands received on its serial port and to control as many as eight IEEE 488 instruments. Moreover, because the Micro488/p derives its power from the host computer's serial port, it requires no external power connection.

Because the **Micro488/p's** firmware converts commands received on its serial port into IEEE 488 protocol, it does not require that the host computer run special software. The host computer must simply have the ability to send and receive ASCII data via its serial port.

The **Micro488/p** attaches directly to the IEEE connector on the back of an instrument, eliminating the need for an additional IEEE cable. To control multiple instruments, you need only connect the instruments with standard IEEE cables and attach the Micro488/p to an open connector on any of the cables.

Specifications

Serial Interface

Electrical Characteristics: RS-232
Duplex: Full with echo/no-echo
Data Bits: 8-bit ASCII
Stop Bits: 1 or 2
Parity: none
Baud Rates: 300, 1200, 2400, 4800, 9600, and 19200, set automatically upon the receipt of a carriage return from the host computer
Terminator: On Transmit, software configurable as LF, CR, LF-CR, or CR-LF; On Receive, CR
Handshaking: Supports Clear To Send (CTS), Request To Send (RTS), and XON/XOFF, software configurable
Serial I/O Buffers: 120-character input buffer
Connector: Accepts 25-pin Sub-D male (DB25P)

IEEE 488 Interface


Controller Subsets: C1, C2, C3, C4, and C28
Terminator: Programmable for LF, CR, LF-CR, CR-LF, and EOI
Connector: Plugs directly into a standard IEEE 488 female receptacle, either directly on an instrument or on a cable

General

Power: Draws less than 5 mA from the DTR or DSR serial lines on the host computer
Environment: 0° to 50°C; 0 to 90% RH, non-condensing
Dimensions: 95 mm W x 58 mm D x 25 mm H (3.7" x 2.3" x 0.9")
Weight: 50.2 g (1.8 oz)



The low-cost **Micro488/p** enables IEEE 488 control from any computer equipped with a serial port

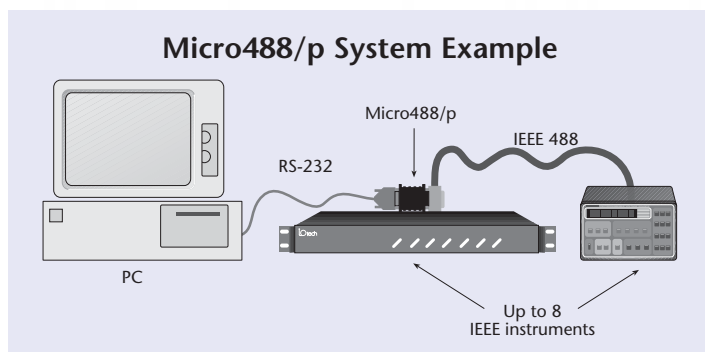

The **Micro488/p** attaches directly to an instrument's IEEE 488 connector

Ordering Information

Description	Part No.
Miniature RS-232 to IEEE controller	Micro488/p
Shielded IEEE 488 cable, 6 ft.	CA-7-3
RS-232 cable, including adapter for 25- or 9-pin PC COM port, 6 ft.	CA-35-6

For complete information on accessories and cables, visit www.iotech.com/acc